

PROCEEDING

2018 5th International Conference on Electrical
Engineering, Computer Science and Informatics

Indexed by:

Scopus[®]

**October
16 - 18, 2018**

Ijen Suites
Resort & Convention
Malang, Indonesia

Co.Organizers:




TABLE OF CONTENTS

Foreword From General Chair EECSI 2018	iv
Foreword From IAES Indonesia Section	v
Foreword From Rector of Universitas Muhammadiyah Malang	vi
ORGANIZING COMMITTEE OF EECSI 2018 CONFERENCE	vii
 KEYNOTE	
KN-1 : Optimization of Modified Sliding Mode Control for an Electro-Hydraulic Actuator System with Mismatched Disturbance	1
 TRACK-1 : Biomedical Engineering and Bioinformatics	
T1-1 : OCT for non-destructive examination of the internal biological structures of mosquito specimen	7
T1-2 : Analysis of EMG based Arm Movement Sequence using Mean and Median Frequency	11
T1-3 : Implementation of Myo Armband on Mobile Application for Post-stroke Patient Hand Rehabilitation	16
T1-4 : Development of Embedded System for Centralized Insomnia System	22
T1-5 : Performance Analysis of Color Cascading Framework on Two Different Classifiers in Malaria Detection	27
T1-6 : Monitoring Walking Devices For Calorie Balance In Patients With Medical Rehabilitation Needs	31
 TRACK-2 : Computer Science and Applications	
T2-1 : E-Government Maturity Model to Support System Dynamics in Public Policymaking	35
T2-2 : Comparative Analysis of Forensic Software on Android-based Blackberry Messenger using NIJ Framework	43
T2-3 : Semi-reactive Switch Based Proxy ARP in SDN	49
T2-4 : Improvement of Cluster Importance Algorithm with Sentence Position for News Summarization	54
T2-5 : Comparison Between A* And Obstacle Tracing Pathfinding In Gridless Isometric Game	60
T2-6 : Automatic Game World Generation for Platformer Games Using Genetic Algorithm	66
T2-7 : Middleware for Network Interoperability in IoT	70
T2-8 : Face RGB-D Data Acquisition System Architecture for 3D Face Identification Technology	74
T2-9 : Feature Expansion for Sentiment Analysis in Twitter	80
T2-10 : Web-based Campus Virtual Tour Application using ORB Image Stitching	85
T2-11 : Automatic User-Video Metrics Creations From Emotion Detection	89
T2-12 : Real Time SIBI Sign Language Recognition Based on K-Nearest Neighbor	95
T2-13 : Artificial Neural Network Parameter Tuning Framework For Heart Disease Classification	100
T2-14 : Winter Exponential Smoothing: Sales Forecasting on Purnama Jati Souvenirs Center	106

T2-15 : Analysis and Design of Decision Support System Dashboard for Predicting Student Graduation Time	110
T2-16 : Sentiment Analysis Using Support Vector Machine Algorithm	116
T2-17 : Group Formation Using Multi Objectives Ant Colony System for Collaborative Learning	122
T2-18 : Smart Traffic Light based on IoT and mBaaS using High Priority Vehicles Method	129
T2-19 : Correlation Between Bruto Domestic Products (Gdp) With Duty Schools	134
T2-20 : Mobile Learning: Utilization of Media to Increase Student Learning Outcomes	138
T2-21 : Study of the Android and ANN-based Upper-arm Mouse	144
T2-22 : FVEC feature and Machine Learning Approach for Indonesian Opinion Mining on YouTube Comments	150
T2-23 : Clustering human perception of environment impact using Rough Set Theory	156
T2-24 : E-Government Service Evaluation of Batu City Health Dept.using e-Govqual Approach and IPA Analysis	160
T2-25 : Implementation of Obfuscation Technique on PHP Source Code	164
 TRACK-3 : Electrical Power Engineering	
T3-1 : Power Demand Forecasting Considering Actual Peak Load Periods Using Artificial Neural Network	169
T3-2 : A New Algorithm for Designing the Parameter of Damped-Type Double Tuned Filter	175
T3-3 : Comparison of LFC Optimization on Micro-hydro using PID, CES, and SMES based Firefly Algorithm	180
T3-4 : Optimal Power Flow using Fuzzy-Firefly Algorithm	186
T3-5 : Low-Frequency Oscillation Mitigation using an Optimal Coordination of CES and PSS based on BA	192
T3-6 : Computer Aided Model for an Off-grid Photovoltaic System using Batteries Only	198
T3-7 : Computer Aided Model for a Low Voltage Varistor with Increased Thermal Stability	202
T3-8 : Smart Frequency Control using Coordinated RFB and TCPS based on Firefly Algorithm	207
T3-9 : Economic Feasibility Study of Rooftop Grid Connected PV System for Peak Load Reduction	213
T3-10 : Automatic Switching Algorithm for Photovoltaic Power Generation System	218
T3-11 : Rotor Speed Control Maximum Power Point Tracking for Small Wind Turbine	225
T3-12 : Stator Flux Oriented Control of Three-Phase Induction Motor with Improved Decoupling Scheme	231
T3-13 : Sensorless PMSM Control using Fifth Order EKF in Electric Vehicle Application	236
T3-14 : Sizing Optimization And Operational Strategy Of HRES (PV-WT) Using Differential Evolution Algorithm	242
T3-15 : Indoor Agriculture: Measurement of The Intensity of LED for Optimum Photosynthetic Recovery	249
T3-16 : Quasi Z-Source Inverter as MPPT on Renewable Energy using Grey Wolf Technique	255

EECSI2018 CONFERENCE

16 - 18 October 2018

Malang, Indonesia

IJEN & SUITES, Resort & Convention,
Malang, Indonesia
10/16 — 10/18/2018

time left

00

days

00

hrs

00

min

00

sec

[Home](#)[Organizing Committee](#)[Information](#)[Publication Ethics & Malpractice Statement](#)[Past EECSI](#)[Registration](#)[↓ Download](#)

2018 EECSI Committee

Steering Committee

- + Adam Skorek, IEEE MGA Awards and Recognition Chair (R7) Trois-Rivières, QC, Canada
- + **Pekik Argo Dahono**, IEEE Indonesia Chapters Chair (EdSoc/EDS/PELS/SPS)
- + **Mochamad Ashari**, Telkom University, Bandung, Indonesia
- + **Tumiran**, Universitas Gadjah Mada, Yogyakarta, Indonesia
- + **Hermawan**, Universitas Diponegoro, Semarang, Indonesia
- + **Zainudin Nawawi**, Universitas Sriwijaya, Palembang, Indonesia
- + **Rahmat Budiarto**, Albaha University, Baha, Saudi Arabia
- + Sri Artini Dwi Prasetyowati, Universitas Islam Sultan Agung, Semarang, Indonesia
- + Kartika Firdausy, Universitas Ahmad Dahlan, Yogyakarta, Indonesia
- + **Siti Nurmaini**, Universitas Sriwijaya, Palembang, Indonesia
- + Ahmad Mubin, Universitas Muhammadiyah Malang, Indonesia

Advisor

- + **Tole Sutikno**, IAES Indonesia

General Chair

- + **Anton Yudhana**, Universitas Ahmad Dahlan, Yogyakarta, Indonesia

General Co-Chair

- + **Zulfatman**, Universitas Muhammadiyah Malang, Indonesia

Finance Chairs and Treasurer

- + Wiwiek Fatmawati, Universitas Islam Sultan Agung, Semarang, Indonesia
- + **Lailis Syafa'ah**, Universitas Muhammadiyah Malang, Indonesia
- + **Lina Handayani**, Universitas Ahmad Dahlan, Yogyakarta, Indonesia

Program Chairs

- + **Deris Stiawan**, Universitas Sriwijaya, Palembang, Indonesia
- + **Mochammad Facta**, Universitas Diponegoro, Semarang, Indonesia
- + **Agus Eko Minarno**, Universitas Muhammadiyah Malang, Indonesia
- + **Machmud Effendy**, Universitas Muhammadiyah Malang, Indonesia

Publication Chairs

Local Arrangement, Exhibits & Registration Chairs

- + **Ermanu Azizul Hakim**, Universitas Muhammadiyah Malang, Indonesia
- + **M. Irfan**, Universitas Muhammadiyah Malang, Indonesia
- + Galih Wasis Wicaksono, Universitas Muhammadiyah Malang, Indonesia
- + Lailatul Husniah, Universitas Muhammadiyah Malang, Indonesia
- + **Ilham Pakaya**, Universitas Muhammadiyah Malang, Indonesia
- + Novendra Setiawan, Universitas Muhammadiyah Malang, Indonesia

International Committee

- + **Lech M. Grzesiak**, Warsaw University of Technology, Poland
- + **Leo P. Ligthart**, Delft University of Technology, Netherlands
- + Malaoui Abdessamad, University of Beni Mellal
- + Muhammad Ishtiaq Ahmad, Beijing Institute of Technology
- + Diego Arcos-Aviles, Universidad de las Fuerzas Armadas ESPE
- + **Eduard Babulak**, Fort Hays State University
- + **Alper Bereketli**, ASELSAN Inc.
- + **Tugçe Bilen**, Istanbul Technical University
- + **Yue Cao**, Northumbria University
- + **Arcangelo Castiglione**, University of Salerno, Italy
- + **Di Chen**, University of Rostock, Germany
- + **Paolo Crippa**, Università Politecnica delle Marche
- + **George Dekoulis**, Aerospace Engineering Institut
- + Muftah Fraifer, IDC-University of Limerick
- + **Felix J. Garcia Clemente**, University of Murcia, Spain
- + **Srideep Ghosh**, ELTRON Wireless
- + **Henry Griffith**, Michigan State University
- + Berkin Güler, Koc University
- + **Jun He**, University of New Brunswick

- + **Munawar A. Riyadi**, Universitas Diponegoro, Semarang, Indonesia
- + **Balza Achmad**, Universitas Gadjah Mada, Yogyakarta, Indonesia
- + **Yuda Munarko**, Universitas Muhammadiyah Malang, Indonesia
- + **Wahyu A. Kusuma**, Universitas Muhammadiyah Malang, Indonesia

Publicity Chairs

- + **Imam Much Ibnu Subroto**, Universitas Islam Sultan Agung, Semarang, Indonesia
- + **Maskur**, Universitas Muhammadiyah Malang, Indonesia
- + **Son Ali Akbar**, Universitas Ahmad Dahlan, Yogyakarta, Indonesia
- + **Sam F. Chaerul**, Universitas Islam Sultan Agung, Semarang, Indonesia
- + **Ahmad Heryanto**, Universitas Sriwijaya, Palembang, Indonesia

Public Relations Chairs

- + **Aina Musdholifah**, Universitas Gadjah Mada, Yogyakarta, Indonesia
- + **Amrul Faruq**, Universitas Muhammadiyah Malang, Indonesia
- + **Reza Firsandaya Malik**, Universitas Sriwijaya, Palembang, Indonesia
- + **Muhammad Syafrullah**, Universitas Budi Luhur, Jakarta, Indonesia
- + **Muhammad Qomaruddin**, Universitas Islam Sultan Agung, Semarang, Indonesia
- + **Krisna Adiyarta**, Universitas Budi Luhur, Jakarta, Indonesia

Technical Program Chairs

- + **Munawar A. Riyadi**, Universitas Diponegoro, Semarang, Indonesia
- + **Balza Achmad**, Universitas Gadjah Mada, Yogyakarta, Indonesia
- + **Deris Stiawan**, Universitas Sriwijaya, Palembang, Indonesia
- + **Arief Marwanto**, Universitas Islam Sultan Agung, Semarang, Indonesia
- + **Mudrik Alaydrus**, Universitas Mercu Buana Jakarta, Indonesia
- + **Teddy Mantoro**, Sampoerna University, Jakarta, Indonesia
- + **Sidiq Syamsul Hidayat**, Politeknik Negeri Semarang, Semarang, Indonesia

Technical Program Members

- + **Syed Mohsen Naqvi**, Newcastle University, UK
- + **Peter Balazs**, Austrian Academy of Sciences, Austria
- + **Mohammed Alghamdi**, Al-Baha University
- + **Marco Baldi**, Università Politecnica delle Marche
- + **Ihsen Ben Mbarek**, National Engineering School of Tunis
- + **Suryadip Chakraborty**, Johnson C. Smith University
- + **July Díaz**, Universidad Distrital Francisco José de Caldas
- + **Saurabh Dixit**, Babu Banarsi Das University, Lucknow
- + **Wajeb Gharibi**, Jazan University, KSA
- + **Visvasuresh Victor Govindaswamy**, Concordia University
- + **Muhammad Abu Bakar Sidik**, Universitas Sriwijaya, Indonesia
- + **Saied Abd El-atty**, Menoufia University-Faculty of Electronic Engineering
- + **A. K. M. Mahtab Hossain**, University of Greenwich
- + **Ahmed Mobashsher**, The University of Queensland
- + **Ratan Kumar Mondal**, Queensland University of Technology
- + **Rodrigo Montufar-Chaveznavia**, Facultad de Ingeniería, Universidad Nacional Autónoma de México
- + **Michel Owayjan**, American University of Science & Technology
- + **Ljiljana Šeric**, University of Split, Croatia
- + **Hengky Susanto**, Hong Kong University of Science and Technology
- + **Kun-Da Wu**, HTC Corporation
- + **Quanxin Zhao**, University of Electronic Science and Technology of China
- + **Tresna Dewi**, Polytechnic of Sriwijaya, Indonesia

- + **Zhaozheng Hu**, Georgia Institute of Technology
- + **Dimitrios Kallergis**, University of Piraeus, Greece
- + **Fukuro Koshiji**, Tokyo Polytechnic University
- + **Sunil Kumar**, The LNM Institute of Information Technology, India
- + **Takashi Kurimoto**, National Institute of Informatics, Japan
- + **Jia-Han Li**, National Taiwan University
- + **Xiangguo Li**, Henan University of Technology, China
- + **Sukadev Meher**, National Institute of Technology, India
- + **Ronald Mulinde**, University of South Australia
- + **Fernando Mussoi**, Federal Institute of Santa Catarina, Brazil
- + **Nagendra Kumar Nainar**, CISCO
- + **Abdellah Najid**, Institut National des Postes et Télécommunications
- + **Gabriele Piantadosi**, University of Naples Federico II
- + **Nadia Qasim**, King's College London
- + **Abdalhossein Rezai**, ACECR
- + **Zulhisyam Salleh**, Universiti Teknikal Malaysia Melaka
- + **Hans Schotten**, University of Kaiserslautern
- + **Min Keng Tan**, Universiti Malaysia Sabah
- + **Revak Tyagi**, Cisco Systems
- + **Marcel Wagner**, University of São Paulo
- + **Hao Wu**, ZTE Corporation
- + **Kishore Yalamanchili**, Google
- + **Mohammed Younis**, University of Baghdad
- + **Jing Zhou**, University of Science and Technology of China
- + **Olympia Roeva**, Institute of Biophysics and Biomedical Engineering
- + **Deepika Koundal**, National Institute of Technology, Hamirpur
- + **Domenico Ciunzo**, University of Naples Federico II
- + **Ravi Subban**, Pondicherry University, Pondicherry, India
- + **Andrea Fiaschetti**, Università degli Studi di Roma La Sapienza, Italy
- + **Murali Krishna Kadiyala**, Wichita State University, United States
- + **Zhe Zhang**, Electrical and Computer Engineering Department, George Mason University
- + **Parag Chatterjee**, Universidad Tecnológica Nacional, Buenos Aires, Argentina
- + **Mohamed Rehan**, AvidBeam Technologies, Cairo, Egypt
- + **Ahmed Helmy**, University of Texas at Dallas, Richardson, United States
- + **Harikumar Rajaguru**, Anna University Chennai, India
- + **Feng Ouyang**, Johns Hopkins University, United States
- + **Xuanxuan Tang**, PLA University of Science and Technology, China



Document details

< Back to results | < Previous 11 of 27 Next >

CSV export ▾ ⬇ Download 🖨 Print ✉ E-mail 📄 Save to PDF ☆ Save to list More... >

View at Publisher

International Conference on Electrical Engineering, Computer Science and Informatics (EECSI)
Volume 2018-October, October 2018, Pages 231-235
5th International Conference on Electrical Engineering Computer Science and Informatics, EECSI
2018; Malang; Indonesia; 16 October 2018 through 18 October 2018; Category numberCFP18B51-
ART; Code 149304

Economic feasibility study of rooftop grid connected PV system for peak load reduction (Conference Paper)

Syafii^a ✉, Wati^b ✉, Novizon^a ✉, Juliandri, D.^a ✉

🔖 Save all to author list

^aElectrical Engineering Department, Engineering Faculty, Universitas Andalas, Padang, Indonesia

^bAccounting Education Department, STKIP PGRI Sumatera Barat, Padang, Indonesia

Abstract

▾ View references (12)

This paper presented the economic feasibility analysis of grid-connected photovoltaic on the roof of building, to reduce peak electrical demand. The Engineering Faculty electrical system is used as case study of PV system economic feasibility. The economic calculation assumptions used are: electricity tariff IDR 1114.74 per kWh based on electricity tariff for medium voltage load, estimated annual module degradation 0.5% and the life expectancy of the solar panels 25 years. The interest rate using of Bank Indonesia (BI) rate for 2018 i.e. 4.25% and inflation rate 3% also considered. The initial investment required to build 117.5 kWp PV system is IDR 2,413 million. The operational and maintenance costs are estimated 1% of initial investment per year. The result of cash flow rate shows that a positive NPV is achievable and payback period less than solar panels life expectancy. The simple payback period is 11 years and discounted payback period calculated by consider multiple parameters to be 14 years. The result of economic analysis using current rate value indicate that the project is profitable. © 2018 IEEE.

SciVal Topic Prominence ⓘ

Topic: Photovoltaic cells | Electricity | Grid parity

Prominence percentile: 85.139 ⓘ

Author keywords

Economic feasibility grid connected PV system Peak load reduction

Funding details

Funding text

The author gratefully acknowledge the assistance rendered by Universitas Andalas for publication funding support of this research paper.

ISSN: 2407439X
ISBN: 978-153868402-3
Source Type: Conference Proceeding
Original language: English

DOI: 10.1109/EECSI.2018.8752957
Document Type: Conference Paper
Volume Editors: Stiawan D., Subroto I.M.I., Riyadi M.A., Aditya C.S.K., Has Z., Yudhana A., Minarno A.E.
Sponsors: Ministry of Research and Higher Education
Publisher: Institute of Advanced Engineering and Science

References (12)

View in search results format >

☐ All CSV export ▾ 🖨 Print ✉ E-mail 📄 Save to PDF Create bibliography

Metrics ⓘ View all metrics >



PlumX Metrics

Usage, Captures, Mentions,
Social Media and Citations
beyond Scopus.



Cited by 0 documents

Inform me when this document is
cited in Scopus:

Set citation alert >

Set citation feed >

Related documents

Design of PV system for electricity
peak-shaving: A case study of
faculty of engineering, Andalas
University

Syafii, Zaini, Juliandri, D.
(2019) 2018 International
Conference on Computing, Power
and Communication Technologies,
GUCON 2018

Performance and energy saving
analysis of grid connected
photovoltaic in West Sumatera

Syafii, Nazir, R.
(2016) International Journal of
Power Electronics and Drive
Systems

Optimization of own electricity
usage with electricity supply from
solar cells at Darajat geothermal
power plant

Atmodjo, B.C.P., Dalimi, R.
(2020) Test Engineering and
Management

View all related documents based
on references

Find more related documents in
Scopus based on:

Authors > Keywords >

Economic Feasibility Study of Rooftop Grid Connected PV System for Peak Load Reduction

Syafii

Electrical Engineering Department, Engineering
Faculty, Universitas Andalas
Padang, Indonesia
syafii@eng.unand.ac.id

Wati

Accounting Education Department, STKIP PGRI
Sumatera Barat
Padang, Indonesia
tegowati73@gmail.com

Novizon

Electrical Engineering Department, Engineering
Faculty, Universitas Andalas
Padang, Indonesia
novizon@eng.unand.ac.id

Dona Juliandri

Electrical Engineering Department, Engineering
Faculty, Universitas Andalas
Padang, Indonesia
juliandri.tan@gmail.com

Abstract— This paper presented the economic feasibility analysis of grid-connected photovoltaic on the roof of building, to reduce peak electrical demand. The Engineering Faculty electrical system is used as case study of PV system economic feasibility. The economic calculation assumptions used are: electricity tariff IDR 1114.74 per kWh based on electricity tariff for medium voltage load, estimated annual module degradation 0.5% and the life expectancy of the solar panels 25 years. The interest rate using of Bank Indonesia (BI) rate for 2018 i.e. 4.25% and inflation rate 3% also considered. The initial investment required to build 117.5 kWp PV system is IDR 2,413 million. The operational and maintenance costs are estimated 1% of initial investment per year. The result of cash flow rate shows that a positive NPV is achievable and payback period less than solar panels life expectancy. The simple payback period is 11 years and discounted payback period calculated by consider multiple parameters to be 14 years. The result of economic analysis using current rate value indicate that the project is profitable.

Keywords—grid connected PV system, economic feasibility, peak load reduction.

I. INTRODUCTION

The Indonesian government encourages the use of renewable energy as a source of energy in office buildings that almost entirely use electricity from National Electricity Company (PLN) grid so as to suppress the use of fuel oil and decrease carbon dioxide (CO₂) emissions. Utilization of renewable energy suitable for offices is photovoltaic (PV) system installed on the roof of the building [1], because most office buildings use electricity during the day or working hours. The PV system is one of the environmentally friendly power generation technologies and can be a solution to the future electrical energy crisis making it the most widely developed and reliable alternative. In addition to being environmentally friendly, the construction of PV System at the load center can reduce network losses, land investment costs and dependence on fossil energy, thereby enhancing energy sustainability and independence [2].

Several studies of designing PV systems on the rooftop of buildings have been done [3-5]. The hybrid system supply design on an institutional building rooftop of Udayana University, Indonesia and Minia University, Egypt have been presented in [3] and [4]. Another research conducted to design PV system for public building i.e for Ibeno Health

Centre [5]. The design result justified that PV system have a potential and feasible to build on the load area, however the weather condition and actual performance need to consider and improve.

The previous research uses assumption data in the design process so that the treatment will likely differ when installed in certain areas. However, in this study, the grid system design is based on the PV system of the actual small-scale pilot project [6] to obtain important parameters in the design and subsequent economic analysis. The grid connected PV systems have been used in this study. The grid connected PV system have many technical advantages such as flexibility, simplicity to install in any area where the solar irradiation is available, as non-polluting, emitting no noise and requiring little maintenance. The Engineering Faculty of Andalas University electrical demand used as case study of PV system design for peak load reduction and common feasibility criteria used to examine the profitability of this PV system project.

II. BUILDING PEAK LOAD REDUCTION

Utilization of renewable energy suitable for offices is a solar power plant using photovoltaic solar modules installed on the roof of the building. Rooftop photovoltaic is a reliable solution for energy supply in office buildings because the majority of office buildings use electricity during the day or working hours because the cost of electricity procurement cheaper than diesel or fuel oil [7]. The integration of PV system close to load centers can reduce power losses and increase voltage profile [8]. In addition, maintenance and operation are also easy but significant impact to reduce pollution and greenhouse effect.

Global warming is an environment problem caused by the effect of greenhouses that occur in the Earth's atmosphere. The Kyoto Protocol was formed that agreed to collectively reduce 5.2% of greenhouse gas emissions. One of the biggest contributors to greenhouse gas emissions is carbon dioxide gas. Gas CO₂ produced through the combustion of motorized vehicle fuel, industry, and the biggest is in the process of generating fossil fuel-powered electricity. Through this design study use solar energy as an alternative power plant to reduce the work of fossil fueled power plants so that can reduce CO₂ gas emissions which is released into

the air. Potential reductions of CO₂ emissions can be calculated using factors emissions of carbon dioxide power plant that is equal to 0.73 kg CO₂/kWh.

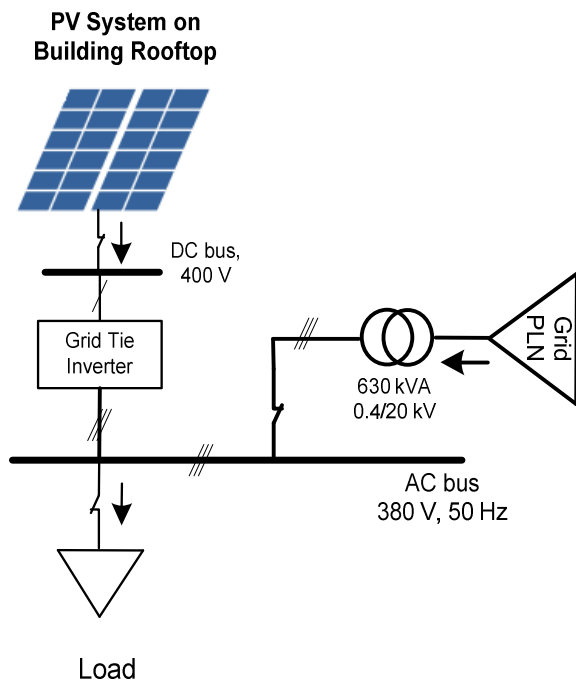


Fig. 1. Grid connected PV system

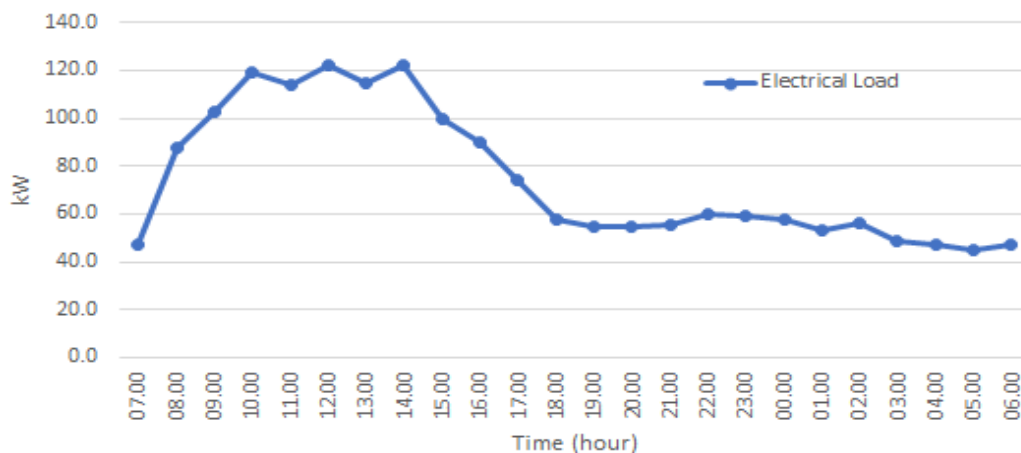


Fig. 2. Electrical load of Engineering Faculty building

The electrical load characteristics of an office building are generally shown in Fig 2. The use of electrical loads as illustrated in Fig 2 is as load characteristic of Engineering Faculty building, Andalas University. The design of grid connected photovoltaic on the roof of the Engineering Faculty building to reduce peak electrical

Grid connected PV as shown in Fig. 1 has been the most popular PV system choice in recent times, because it's can reduce investment funds and battery dependence. Some of the advantages of grid connected PV is the investment and maintenance costs are greatly reduced due to unnecessary battery. When the power of the PV system is greater than the load, the excess power can be send and sold to the power grid. So the electricity bill can be reduced. More environmentally friendly because it reduces battery waste that requires special treatment and not produce CO₂ emissions. In addition to the above advantages, for the case in Indonesia, have supported by appropriate regulation. The scheme will be very helpful for the distribution of targeted electricity subsidies.

A grid connected PV system consists of the following components: solar panels, grid-tied inverter (GTI), solar cables and Mounting. GTI is a special type of inverter that converts direct current (DC) into alternating current (AC) and feeds into an existing electricity network and cannot be used in standalone applications where there is no electricity. Grid-tied PV systems are generally cheaper and simpler to install, as long as the grid is close to the load center. On sunny days, solar panels will usually generate more electricity than consume during the daylight hours. With net metering, the owners can tranfer this excess electricity onto the utility grid rather than store in a battery-bank storage system, which would involve a considerably larger initial investment.

demand have been presented in paper [9]. The result of design study using 470 units of solar module can be shaved maximum load of Engineering Faculty building as shown in Fig 3 with discontinuous line. The load consumed and PV system designed have been used in the study to achieve economic feasibility.

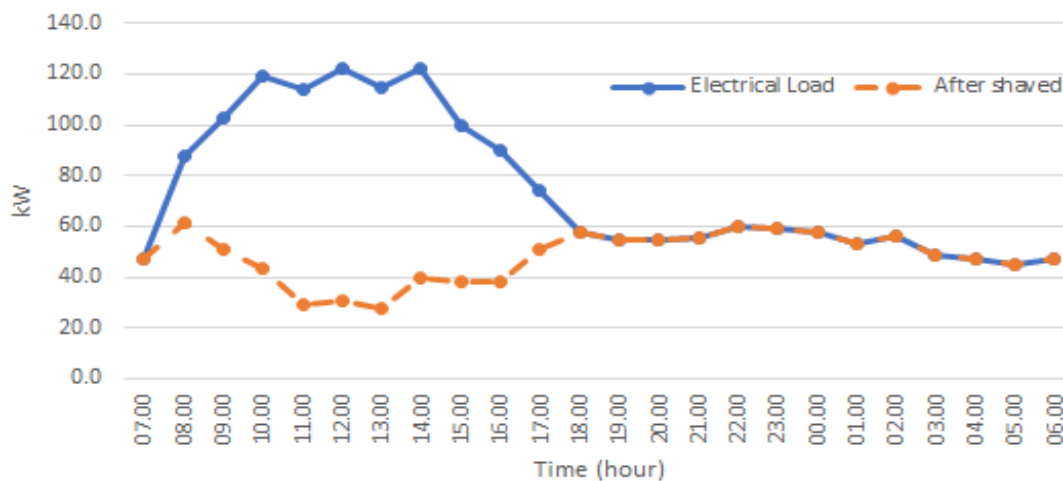


Fig. 3. PV installation reduce EF peak load

III. ECONOMIC FEASIBILITY CRITERIA

The economic analysis of the PV system for government buildings uses a business feasibility study calculation system to determine investment criteria. These criteria can be used to determine the profitability of a project. The most common criteria used to examine the profitability of a PV project are net present value (NPV), payback period and internal rate of return (IRR). Net present value (NPV) is applied in capital budgeting to analyze the profitability of an investment or project and this formula is sensitive to the reliability of future cash inflows that an investment or project will yield. NPV compares the value of money received today and the value of that same amount of money in the future by taking inflation and rate of return into account. NPV is based on discounted cash flow (DCF) techniques with three basic steps.

The first step is to find the present value of each cash flow, including all inflows, outflows, and discounted at the project's cost of capital. NPV is the ratio between the value of the market investment and the cost itself. The formula for determining NPV is as follows [10]:

$$NPV = \sum_{t=0}^n \frac{CIF_t}{(1+k)^t} - Invest \quad (1)$$

Where:

- k = Discount rate
- CIF_t = Cash in flow for t period
- n = last period of cash flow expected
- Invest = Initial investment

The result can be evaluated that if the NPV value is negative, then the project is not recommended to be implemented, if the value is positive, then the project is feasible to implement. NPV value is zero means there is no difference if the project is still implemented or rejected.

Payback period is a period of time required to recoup the fund expended in an PV investment or to reach the break-even point. The calculation of payback period is done to know the financial risk to the project be done. The smaller payback period will be better, with the risk factor for return on capital will be faster in a short time. In

calculating the payback period is usually called the payback method by dividing the initial capital issued with income received by investors for a year. The use of payback period in calculating the effectiveness of investment still has limits. The payback period does not calculate the profit earned after the payback period and has limitations in comparing the two projects.

The annual maintenance and operational costs for PV system, generally accounted for 1 - 2% of the total initial investment cost [11]. The large percentage of annual maintenance and operational expenses for the PV power plant covering costs for solar panel cleaning work, maintenance and inspection costs of equipment and installations will be set at 1% of the initial total investment because Indonesia only have two seasons i.e. the rainy season and the dry season so that the cost of cleaning and maintaining the solar panel is not as large as the country that have four seasons in one year. In addition, the determination of this percentage is also based on the level of wage labor in Indonesia which is cheaper than the wage rate of labor in other countries.

IV. ECONOMIC FEASIBILITY OF PV SYSTEM FOR PEAK LOAD SHAVING

The process of economic feasibility analysis is carried out to calculate the feasibility of developing the PV system by comparing the amount of investment cost to income/return (revenue) obtained during the review time (time horizon). In other words, this financial analysis is carried out by forming cash flow from the project plan from the perspective of investors. The time horizon is limited by the estimated of the PV system components lifespan. The review time chosen in this study is 25 years same as solar panel lifespan.

TABLE 1. COST ESTIMATE OF PV SYSTEM INSTALLATION

PV System Components	Total price (IDR)
PV module, 470@250Wp Poly	1,903,265,000
Grid-Tied PV Inverter, 3P	195,000,000
MCB, Cables, busbar and fuses (15 % of PV system cost)	314,739,750
Total cost	2,413,004,750

The initial investment cost estimation used in this study is as shown in Table 1. The amount of electrical energy that can be generated by the 470 units of solar panels for a year is calculated based on actual small-scale PV data for various weather conditions with upscaling factor 94. The weather condition data for Padang city obtained from Meteorological, Climatological, and Geophysical Agency (BMKG) data is shown in Fig 4. Based on the BMKG data the average weather condition can be summarized in percentage/year as show in Table 2. By using this data, the potential of energy of PV system designed can be generated 428.16 kWh/day.

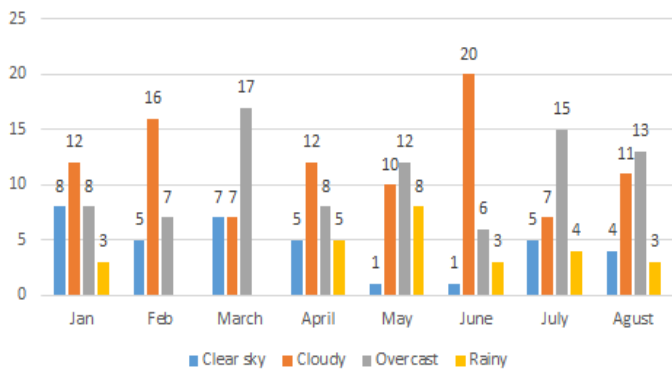


Fig. 4. West Sumatera weather condition

TABLE 2. PV SYSTEM ENERGY GENERATION

Weather	Data Jan-August	Percentage	Energy (kWh)/day
Clear	36 days	15 %	94.60
Cloudy	95 days	39 %	198.55
Overcast	86 days	35 %	119.20
Raining	26 days	11 %	15.82
Total	243 days	100 %	428.16

The electric tariff IDR 1114.74 per kWh based on electricity tariff for medium voltage load 20 kV by PLN 2018 is used. The estimated annual module degradation 0.5% and the life expectancy of the solar panels were assumed to be 25 years as determined by the most of solar companies [11]. The Bank Indonesia (BI) interest rate for 2018 i.e. 4.25% and inflation rate 3% are used in economic calculation based on present value. The result of cash flow rate calculation is shown in Fig 5.

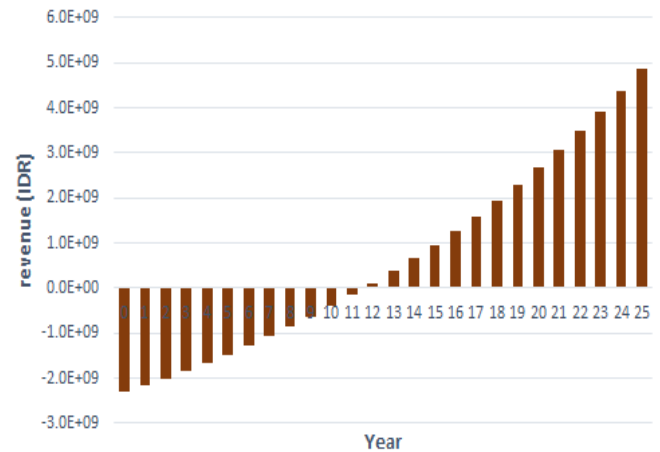


Fig. 5. Cash flow rate

Net present value compares the value of an investment today to the future value of the money based on inflation and returns. NPV is a simple calculation of difference between the present value of cash inflows and outflows using equation (1) as below:

$$\begin{aligned} \text{NPV} &= 3,757,591,476 - 2,413,004,750 \\ &= 1,344,586,726 \end{aligned}$$

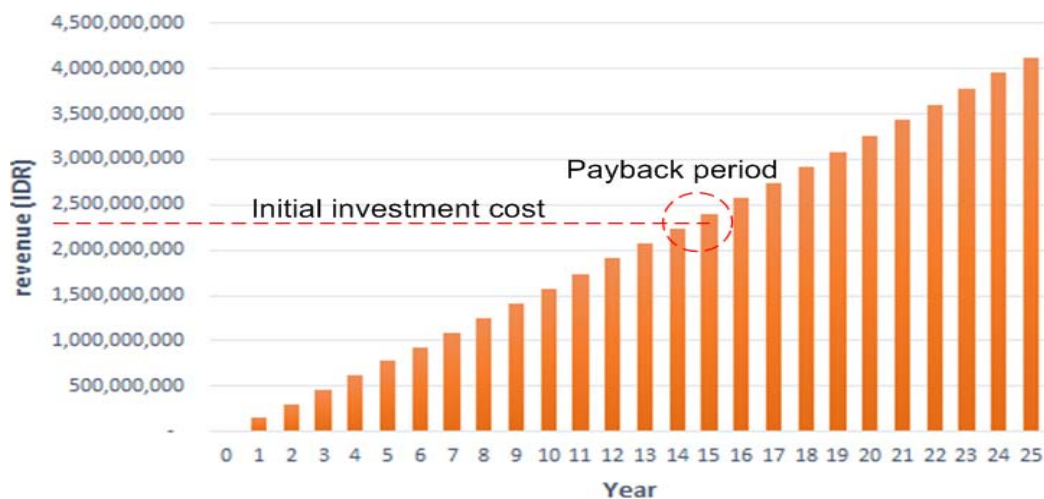


Fig. 6. Present value cumulative Net Cash flow (NCF)

A positive value of NPV indicates a favorable investment. Then, the simple payback period can be calculated by dividing total PV system investment cost by yearly savings. The simple payback period for this PV system is 12 years. The discounted payback period can be

determined from Fig 6 for DF 4.25% is equal to 14 years and 5 months. The simple method for calculating the cost of energy is the ratio of total investment plus the O&M cost over the total energy produced over project period.

The result for both simple and net present value method shown in Table 3.

TABLE 3. ECONOMIC FEASIBILITY

Feasibility Criteria	DF = 4.25%	DF=7.25%
Simple Payback period	11 years	11 years
Payback period	14	18
NPV	1,344,586,726	456,709,878

By knowing the amount of energy that can be generated by PV system and the factor of carbon dioxide gas emission of 0.730 kg CO₂/kWh [12], it can be known amount of emissions that can be reduced. The design results show that the potential of solar energy which can be generated by the PV system in one year amounted to 156,280 kWh, so that can be obtained the potential of CO₂ emissions that can be reduced in one year is 118.08 tons.

V. CONCLUSION

The economic feasibility study of grid connected photovoltaic on the roof of the building for electrical peak load shaving have been done. The potential of energy of PV system designed can be generated 428.16 kWh/day. The economic feasibility study have used actual data of PV system of 1.25 kWp with upscaling factor 94 times, and considering weather conditions from BMKG data per year. The result of economic analysis shows that NPV for Engineering Faculty is IDR 1,344,586,726, simple payback period is 11 years and discounted payback period is 14 years. The result of cash flow rate shows that a positive NPV achievable and payback period less than PV panels life time. The economic feasibility results indicates that the development of PV system in the Faculty of Engineering, Andalas University building is feasible.

ACKNOWLEDGEMENTS

The author gratefully acknowledge the assistance rendered by Universitas Andalas for publication funding support of this research paper.

REFERENCES

- [1] Hagerman, S., Jaramillo, P. & M Granger Morgan, 2016. Is rooftop solar PV at socket parity without subsidier?, *Energy Policy*, 89, pp.84-94.
- [2] Tyagi, V. V., Rahim, N. a. a., Rahim, N. a., & Selvaraj, J. a. L. (2013). Progress in solar PV technology: Research and achievement. *Renewable and Sustainable Energy Reviews*, 20, 443–461.
- [3] IAD. Giriantari, Rina Irawati, Smart Microgrid System with Hybrid System Supply: Udayana University Pilot Project Design, ICSGTEIS Proceeding, 6-8 Oct 2016, Bali
- [4] Hassan, M.S and Elbaset, A.A, Comparative Study for Optimum Design of Grid Connected PV System based on Actual System Specifications, *International Journal of Computer Applications*, Volume 116, No. 3, April 2015.
- [5] Anyanime Tim Umoette, Emmanuel A. Ubom, Mbetobong Udo Festus, Design of Stand Alone Floating PV System for Ibeno Health Centre, *Science Journal of Energy Engineering*, 4(6), 2016, pp. 56-61.
- [6] Syafii, Refdinal Nazir, Performance and Energy Saving Analysis of Grid Connected Photovoltaic in West Sumatera, *International Journal of Power Electronics and Drive System (IJPEDS)*, Vol. 7, No. 4, December 2016, pp. 1348~1354.
- [7] Ferial, 2015. PLTS Rooftop Untuk Gedung Perkantoran. Available at: <http://ebtke.esdm.go.id/post/2015/03/11/800/plts.rooftop.untuk.gedung.perkantoran>.
- [8] Syafii & Nor, K.M., 2015. Unbalanced Active Distribution Analysis with Renewable Distributed Energy Resources. *Telkomnika*, 13(1)
- [9] Syafii, Dona Juliandri, Zaini, "Design of PV System for Electricity Peak-Shaving: A Case Study of Faculty of Engineering, Andalas University," 2018 International Conference on Computing, Power and Communication Technologies, Galgotias University, Greater Noida, UP, India. Sep 28-29, 2018.
- [10] Tze San Ong dan Chun Hau Thum, "Net Present Value and Payback Period for Building Integrated Photovoltaic Projects in Malaysia," *International Journal of Academic Research in Business and Social Sciences*, Februari 2013.
- [11] J.Lee, B. Chang, C. Aktas, R. Gorthala, Economic feasibility of campus-wide photovoltaic systems in New England, *Renewable Energy*, Vol. 99, 2016, pp. 452-464
- [12] Moien A.Omar, Marwan M.Mahmoud, Grid Connected PV- Home Systems in Palestine: A Review on Technical Performance, Effects and Economic Feasibility, *Renewable and Sustainable Energy Reviews*, Volume 82, Part 3, February 2018, Pages 2490-2497

