



ScienceDirect

Journal of Cleaner Production

Supports *open access*10.9
CiteScore7.246
Impact Factor

Search in this journal

Submit your article

Guide for authors

Volume 143

Pages 1-1340 (1 February 2017)

< Previous vol/issue

Next vol/issue >

Receive an update when the latest issues in this journal are published

Sign in to set up alerts

Full text access

Editorial board

Page IFC

[Download PDF](#)

Review article Full text access

Palm fatty acid distillate as a potential source for biodiesel production-a review

Nazratul Zaheera Abdul Kapur, Gaanty Pragas Maniam, Mohd Hasbi Ab. Rahim, Mashitah M. Yusoff

Pages 1-9

[Download PDF](#) Article preview

Research article Full text access

Physicochemical investigation of ultrasound effects on some steps of mink fur processing. A suggestion for improving the worker health and reducing the environmental impact

Gennaro Bufalo, Francesca Di Nezza, Luciana Cimmino, Francesca Cuomo, Luigi Ambrosone

Pages 10-16

[Download PDF](#) Article preview

Research article Full text access

What cause a surge in China's CO₂ emissions? A dynamic vector autoregression analysis

Bin Xu, Boqiang Lin

Pages 17-26

[Download PDF](#) Article preview 

Research article Full text access

Determinants of sustainability reporting and its impact on firm value: Evidence from the emerging market of Turkey

Cemil Kuzey, Ali Uyar

Pages 27-39

[Download PDF](#) Article preview 

Research article Full text access

Using real options for urban infrastructure adaptation under climate change

Kyeongseok Kim, Sooji Ha, Hyoungkwan Kim

Pages 40-50

[Download PDF](#) Article preview 

Research article Full text access

Green logistics and national scale economic indicators: Evidence from a panel of selected European countries

Khalid Zaman, Sadaf Shamsuddin

Pages 51-63

[Download PDF](#) Article preview 

Research article Full text access

Longitudinal assessment of rainwater quality under tropical climatic conditions in enabling effective rainwater harvesting and reuse schemes

Janet Yip Cheng Leong, Meng Nan Chong, Phaik Eong Poh, Andreas Hermawan, Amin Talei

Pages 64-75

[Download PDF](#) Article preview 

Research article Full text access

Environmental and energy analysis of biopolymer film based on cassava starch in Brazil

Cristiane Maria de Léis, Alex Rodrigues Nogueira, Luiz Kulay, Carmen Cecília Tadini

Pages 76-89

[Download PDF](#) Article preview 

Review article Full text access

Energy efficiency of working vessels – A framework

Marie Lützen, Lars Lindegaard Mikkelsen, Signe Jensen, Hanna Barbara Rasmussen

Pages 90-99

[Download PDF](#) Article preview 

Research article Full text access

Identifying critical risk factors of sustainable supply chain management: A rough strength-relation analysis method

Wenyan Song, Xinguo Ming, Hu-Chen Liu

Pages 100-115

[Download PDF](#) Article preview 

Research article Full text access

Consideration of marginal electricity in real-time minimization of distributed data centre emissions

Thomas Dandres, Reza Farrahi Moghaddam, Kim Khoa Nguyen, Yves Lemieux, ... Mohamed Cheriet

Pages 116-124

[Download PDF](#) Article preview 

Research article Full text access

Coal use for world economy: Provision and transfer network by multi-region input-output analysis

X.H. Xia, B. Chen, X.D. Wu, Y. Hu, ... C.Y. Hu

Pages 125-144

[Download PDF](#) Article preview 

Research article Full text access

Environmental pressure and quality practices in artisanal family businesses: The mediator role of environmental values

Patricia S. Sánchez-Medina, René Díaz-Pichardo

Pages 145-158

[Download PDF](#) Article preview 

Research article Full text access

Environmental impact and damage categories caused by air pollution emissions from mining and quarrying sectors of European countries

Agata Fugiel, Dorota Burchart-Korol, Krystyna Czaplicka-Kolarz, Adam Smoliński

Pages 159-168

[Download PDF](#) Article preview 

Research article Open access

Evaluating greenhouse gas emissions from dairy manure management practices using survey data and lifecycle tools

Horacio A. Aguirre-Villegas, Rebecca A. Larson

Pages 169-179

[Download PDF](#) Article preview 

Research article Full text access

Selection of industrial (food, drink and milk sector) wastewater treatment technologies: A multi-criteria assessment

A. Castillo, P. Vall, M. Garrido-Baserba, J. Comas, M. Poch

Pages 180-190

[Download PDF](#) Article preview 

Research article Full text access

Repercussion the use phase in the life cycle assessment of structures in residential buildings using one-way slabs

Esteban Fraile-Garcia, Javier Ferreiro-Cabello, Eduardo Martinez-Camara, Emilio Jimenez-Macias

Pages 191-199

[Download PDF](#) Article preview 

Research article Full text access

Scenarios for the reduction of environmental impact in *Agaricus bisporus* production

F.J. Leiva, J. García, E. Martínez, E. Jiménez, J. Blanco

Pages 200-211

[Download PDF](#) Article preview 

Research article Full text access

Appraisal of eco-friendly Preventive Maintenance scheduling strategy impacts on GHG emissions mitigation in smart grids

Mojgan Mollahassani-pour, Masoud Rashidinejad, Amir Abdollahi

Pages 212-223

[Download PDF](#) Article preview 

Research article Full text access

Natural evolution of alkaline characteristics in bauxite residue

Xiangfeng Kong, Ying Guo, Shengguo Xue, William Hartley, ... Qingyu Cheng

Pages 224-230

[Download PDF](#) Article preview 

Research article Full text access

Ultrasound and mechanical activation cleaner promote lattice manganese extraction: A combined experimental and modeling study

Hongping He, Jianglin Cao, Ning Duan

Pages 231-237

[Download PDF](#) Article preview 

Research article Full text access

Industrial eco-efficiency in China: A provincial quantification using three-stage data envelopment analysis

Jiangxue Zhang, Yimeng Liu, Yuan Chang, Lixiao Zhang

Pages 238-249

[Download PDF](#) Article preview 

Research article Full text access

Recovery of citric acid from fermented liquid by bipolar membrane electrodialysis

Xiaohan Sun, Huixia Lu, Jianyou Wang

Pages 250-256

[Download PDF](#) [Article preview](#) ✓

Research article Full text access

Eco-efficiency and entropy generation evaluation based on emergy analysis: Application to two small biogas plants

G. Merlin, H. Boileau

Pages 257-268

[Download PDF](#) [Article preview](#) ✓

Research article Full text access

An ecofriendly dyeing of wool with supercritical carbon dioxide fluid

Huanda Zheng, Yanyan Xu, Juan Zhang, Xiaoqing Xiong, ... Laijiu Zheng

Pages 269-277

[Download PDF](#) [Article preview](#) ✓

Research article Full text access

Analysis of energy related carbon dioxide emission and reduction potential in Pakistan

Boqiang Lin, Izhar Ahmad

Pages 278-287

[Download PDF](#) [Article preview](#) ✓

Research article Full text access

Potential benefits and environmental life cycle assessment of equipping buildings in dense cities for struvite production from source-separated human urine

Andre M.K. Mbaya, Ji Dai, Guang-Hao Chen

Pages 288-302

[Download PDF](#) [Article preview](#) ✓

Research article Full text access

Waste from eucalyptus wood steaming as a natural dye source for textile fibers

T. Rossi, P.M.S. Silva, L.F. De Moura, M.C. Araújo, ... H.S. Freeman

Pages 303-310

[Download PDF](#) [Article preview](#) ✓

Research article Full text access

Clean strengthening reduction of lead and zinc from smelting waste slag by iron oxide

Yanchun Li, Zhilou Liu, Hui Liu, Bing Peng

Pages 311-318

[Download PDF](#) [Article preview](#) ✓

Research article Full text access

Recovery of LiCoO₂ and graphite from spent lithium-ion batteries by Fenton reagent-assisted flotation

Yaqun He, Tao Zhang, Fangfang Wang, Guangwen Zhang, ... Jie Wang
Pages 319-325

[Download PDF](#) Article preview 

Research article Full text access

Measuring sustainability at the community level: An overview of China's indicator system on National Demonstration Sustainable Communities

Yangsiyu Lu, Yong Geng, Zhe Liu, Raymond Cote, Xiaoman Yu
Pages 326-335

[Download PDF](#) Article preview 

Research article Full text access

Enhancement of solid potato waste treatment by microbial fuel cell with mixed feeding of waste activated sludge

Haixia Du, Fusheng Li
Pages 336-344

[Download PDF](#) Article preview 

Research article Full text access

Policy analysis on recycling fund management for E-waste in Taiwan under uncertainty

Hsu-Shih Shih
Pages 345-355

[Download PDF](#) Article preview 

Research article Full text access

Carbon dioxide (CO₂) emissions during urbanization: A comparative study between China and Japan

Xiaoling Ouyang, Boqiang Lin
Pages 356-368

[Download PDF](#) Article preview 

Research article Full text access

Minimization of municipal sewage sludge by means of a thermophilic membrane bioreactor with intermittent aeration

Maria Cristina Collivignarelli, Alessandro Abbà, Federico Castagnola, Giorgio Bertanza
Pages 369-376

[Download PDF](#) Article preview 

Research article Full text access

Evaluation of the derivative environment in coal mine safety production systems: Case study in China

Shuai Han, Hong Chen, Ruyin Long, Hui Qi, Xiaotong Cui
Pages 377-387

[Download PDF](#) Article preview 

Research article Full text access

Impact of efficiency, investment, and competition on low carbon manufacturing

Xu Chen, Zheng Luo, Xiaojun Wang

Pages 388-400

[Download PDF](#) Article preview 

Research article Full text access

Analysis of metallic and metal oxide nanomaterial environmental emissions

Thabet Tolaymat, Amro El Badawy, Ash Genaidy, Wael Abdelraheem, Reynold Sequeira

Pages 401-412

[Download PDF](#) Article preview 

Research article Full text access

Multivariate Normal Boundary Intersection based on rotated factor scores: A multiobjective optimization method for methyl orange treatment

Fabiano Luiz Naves, Taynara Incerti de Paula, Pedro Paulo Balestrassi, Washington Luis Moreira Braga, ... Anderson Paulo de Paiva

Pages 413-439

[Download PDF](#) Article preview 

Research article Full text access

A novel design for clean and economical manufacturing new nano-porous zeolite based adsorbent by alkali cement kiln dust for lead uptake from wastewater

Shiva Salem, Amin Salem

Pages 440-451

[Download PDF](#) Article preview 

Research article Full text access

Energy consumption in China's rural areas: A study based on the village energy survey

Ren Wang, Zhujun Jiang

Pages 452-461

[Download PDF](#) Article preview 

Research article Full text access

A new indicator to estimate the efficiency of water and energy use in agro-industries

Beatriz Carrasquer, Javier Uche, Amaya Martínez-Gracia

Pages 462-473

[Download PDF](#) Article preview 

Research article Full text access

Assessing green human resources management practices in Palestinian manufacturing context: An empirical study

Hiba A. Masri, Ayham A.M. Jaaron

Pages 474-489

[Download PDF](#) Article preview 

Research article Full text access

Enzymatic and catalytic hybrid method for levulinic acid synthesis from biomass sugars

Siamak Alipour, Hamid Omidvarborna

Pages 490-496

[Download PDF](#) Article preview 

Research article Full text access

Exploration of fertilizer industry wastes as potential source of critical raw materials

C.R. Cánovas, R. Pérez-López, F. Macías, S. Chapron, ... S. Pellet-Rostaing

Pages 497-505

[Download PDF](#) Article preview 

Research article Full text access

Recycling of high volumes of cement kiln dust in bricks industry

Mohamed M. El-Attar, Dina M. Sadek, Amir M. Salah

Pages 506-515

[Download PDF](#) Article preview 

Research article Full text access

Restaurant menu design and more responsible consumer food choice: An exploratory study of managerial perceptions

Viachaslau Filimonau, Marija Krivcova

Pages 516-527

[Download PDF](#) Article preview 

Research article Full text access

Comparative life cycle assessment of different synthesis routes of magnetic nanoparticles

S. Feijoo, S. González-García, Y. Moldes-Diz, C. Vazquez-Vazquez, ... M.T. Moreira

Pages 528-538

[Download PDF](#) Article preview 

Research article Full text access

Optimal abatement technology adoption based upon learning-by-doing with spillover effect

Jian-Xin Guo, Ying Fan

Pages 539-548

[Download PDF](#) Article preview 

Research article Full text access

Industrial research on the high-temperature modification of Basic Oxygen Furnace slag with solid waste compound

Fang Lian, Laijun Ma, Kuochih Chou

Pages 549-556

[Download PDF](#) Article preview 

Research article Full text access

Examining the potential for energy-positive bulk-water infrastructure to provide long-term urban water security: A systems approach

Oz Sahin, Raymond Siems, Russell G. Richards, Fernanda Helfer, Rodney A. Stewart

Pages 557-566

[Download PDF](#) Article preview 

Research article Full text access

Sustainable platform identification for product family design

Samyeon Kim, Seung Ki Moon

Pages 567-581

[Download PDF](#) Article preview 

Research article Full text access

Improvements in the decision making for Cleaner Production by data mining: Case study of vanadium extraction industry using weak acid leaching process

Jia Li, Yimin Zhang, Dongyun Du, Zhengyu Liu

Pages 582-597

[Download PDF](#) Article preview 

Review article Full text access

Availability and processing of recycled aggregates within the construction and demolition supply chain: A review

R.V. Silva, J. de Brito, R.K. Dhir

Pages 598-614

[Download PDF](#) Article preview 

Research article Open access

Direct production of lactic acid based on simultaneous saccharification and fermentation of mixed restaurant food waste

Daniel Pleissner, Francesca Demichelis, Silvia Mariano, Silvia Fiore, ... Joachim Venus

Pages 615-623

[Download PDF](#) Article preview 

Research article Full text access

Developing a bio-based packaging film from soya by-products incorporated with valonea tannin

Haixia Wang, Lijuan Wang

Pages 624-633

[Download PDF](#) Article preview 

Research article Full text access

Long term studies on the utilisation of quartz sandstone wastes in cement concrete

Sanjeev Kumar, Ramesh Chandra Gupta, Sandeep Shrivastava

Pages 634-642

[Download PDF](#) Article preview 

Research article Full text access

Preparation of chemically activated carbon from waste biomass by single-stage and two-stage pyrolysis

Anton Zubrik, Marek Matik, Slavomír Hredzák, Michal Lovás, ... Jaroslav Briančin

Pages 643-653

[Download PDF](#) Article preview 

Research article Full text access

An ecological understanding of net-zero energy building: Evaluation of sustainability based on emergy theory

Hwang Yi, Ravi S. Srinivasan, William W. Braham, David R. Tilley

Pages 654-671

[Download PDF](#) Article preview 

Research article Full text access

Farmers' intention and decision to adapt to climate change: A case study in the Yom and Nan basins, Phichit province of Thailand

Noppol Arunrat, Can Wang, Nathsuda Pumijumnong, Sukanya Sereenonchai, Wenjia Cai

Pages 672-685

[Download PDF](#) Article preview 

Research article Full text access

Adaptation planning of community energy systems to climatic change over Canada

Q.G. Lin, M.Y. Zhai, G.H. Huang, X.Z. Wang, ... J.W. Pi

Pages 686-698

[Download PDF](#) Article preview 

Research article Full text access

Energy use for water provision in cities

Ka Leung Lam, Steven J. Kenway, Paul A. Lant

Pages 699-709

[Download PDF](#) Article preview 

Research article Full text access

Circular economy for the built environment: A research framework

Francesco Pomponi, Alice Moncaster

Pages 710-718

[Download PDF](#) Article preview 

Research article Full text access

Effects of feedback about community water consumption on residential water conservation

Yurina Otaki, Kazuhiro Ueda, Osamu Sakura

Pages 719-730

[Download PDF](#) Article preview 

Research article Full text access

Measuring incoordination-adjusted sustainability performance during the urbanization process: Spatial-dimensional perspectives

Liyin Shen, Zhenyu Zhang, Xiaoling Zhang, Hang Yan, Bei He

Pages 731-743

[Download PDF](#) Article preview 

Research article Full text access

Life Cycle Assessment and Multi-criteria Decision Analysis: Selection of a strategy for domestic food waste management in Rio de Janeiro

Ana Carolina Maia Angelo, Anna Bernstad Saraiva, João Carlos Namorado Clímaco, Carlos Eduardo Infante, Rogerio Valle

Pages 744-756

[Download PDF](#) Article preview 

Review article Full text access

The Circular Economy – A new sustainability paradigm?

Martin Geissdoerfer, Paulo Savaget, Nancy M.P. Bocken, Erik Jan Hultink

Pages 757-768

[Download PDF](#) Article preview 

Research article Full text access

Eco-design practices with a focus on quantitative environmental targets: An exploratory content analysis within ICT sector

Siru Sihvonen, Jouni Partanen

Pages 769-783

[Download PDF](#) Article preview 

Research article Full text access

A methodology to assess China's building energy savings at the national level: An IPAT–LMDI model approach

Minda Ma, Ran Yan, Yongjie Du, Xianrui Ma, ... Pengpeng Xu

Pages 784-793

[Download PDF](#) Article preview 

Research article Open access

An investigation into reducing the spindle acceleration energy consumption of machine tools

Jingxiang Lv, Renzhong Tang, Wangchujun Tang, Ying Liu, ... Shun Jia

Pages 794-803

[Download PDF](#) Article preview 

Research article Full text access

Membrane fouling in whey processing and subsequent cleaning with ultrasounds for a more sustainable process

María-José Luján-Facundo, José-Antonio Mendoza-Roca, Beatriz Cuartas-Urbe, Silvia Álvarez-Blanco

Pages 804-813

[Download PDF](#) Article preview 

Review article Full text access

Comprehensive utilization of shrimp waste based on biotechnological methods: A review

Xiangzhao Mao, Na Guo, Jianan Sun, Changhu Xue

Pages 814-823

[Download PDF](#) Article preview 

Research article Full text access

A comparative life cycle assessment highlighting the trade-offs of a liquid manure separator-composter in a Canadian dairy farm system

Geoffrey Guest, Ward Smith, Brian Grant, Andrew VanderZaag, ... Brian McConkey

Pages 824-835

[Download PDF](#) Article preview 

Research article Full text access

Energy performance of wind power in China: A comparison among inland, coastal and offshore wind farms

Jin Zhang, Jiwei Zhang, Ling Cai, Li Ma

Pages 836-842

[Download PDF](#) Article preview 

Short communication Full text access

Negative impact from the application of natural fibers

Oludaisi Adekomaya, Tamba Jamiru, Rotimi Sadiku, Zhongie Huan

Pages 843-846

[Download PDF](#) Article preview 

Research article Full text access

MultivalORIZATION of apple pomace towards materials and chemicals. Waste to wealth

Malcolm Yates, Milagros Ramos Gomez, Maria A. Martin-Luengo, Violeta Zurdo Ibañez, Ana Maria Martinez Serrano

Pages 847-853

[Download PDF](#) Article preview 

Research article Full text access

Research on bullwhip effect in energy-efficient air conditioning supply chain

Junhai Ma, Binshuo Bao

Pages 854-865

[Download PDF](#) Article preview 

Research article Full text access

Cradle-to-gate life cycle assessment of forest supply chains: Comparison of Canadian and Swedish case studies

Teresa de la Fuente, Dimitris Athanassiadis, Sara González-García, Tomas Nordfjell

Pages 866-881

 [Download PDF](#) [Article preview](#) 

Research article Full text access

Minimizing economic and environmental impacts through an optimal preventive replacement schedule: Model and application

Feri Afrinaldi, Taufik, Andrea Marta Tasman, Hong-Chao Zhang, Alizar Hasan

Pages 882-893

 [Download PDF](#) [Article preview](#) 

Research article Full text access

Product-service systems in Southeast Asia: Business practices and factors influencing environmental sustainability

Monique Retamal

Pages 894-903

 [Download PDF](#) [Article preview](#) 

Research article Full text access

Environmental impact assessment of an Italian vertically integrated broiler system through a Life Cycle approach

V. Cesari, M. Zucali, A. Sandrucci, A. Tamburini, ... I. Toschi

Pages 904-911

 [Download PDF](#) [Article preview](#) 

Research article Full text access

Effects of operational conditions on the energy efficiency of photovoltaic modules operating in Malaysia

Mohammad Mafizur Rahman, Md Hasanuzzaman, Nasrudin Abd Rahim

Pages 912-924

 [Download PDF](#) [Article preview](#) 

Research article Full text access

Carbon footprint of the insulation cork board

Ana S. Tártaro, Teresa M. Mata, António A. Martins, Joaquim C.G. Esteves da Silva

Pages 925-932

 [Download PDF](#) [Article preview](#) 

Research article Full text access

Motivations for environmental and social consciousness: Reevaluating the sustainability-based view

Sebastian Brockhaus, Stanley E. Fawcett, A. Michael Knemeyer, Amydee M. Fawcett

Pages 933-947

 [Download PDF](#) [Article preview](#) 

Research article Full text access

Strategies for introducing titania onto mesostructured silica nanoparticles targeting enhanced photocatalytic activity of visible-light-responsive Ti-MSN catalysts

A.F.A. Rahman, A.A. Jalil, S. Triwahyono, A. Ripin, ... N.S. Hassan

Pages 948-959

[Download PDF](#) Article preview 

Research article Full text access

Characteristic of air separation in hollow-fiber polymeric membrane for oxygen enriched air clean combustion applications

Mohamed A. Habib, Medhat A. Nemitallah, Daa Afaneh, Khaled Mezghani

Pages 960-972

[Download PDF](#) Article preview 

Research article Full text access

Life cycle assessment of bioethanol production from three feedstocks and two fermentation waste reutilization schemes

Fang-Chih Chang, Lang-Dong Lin, Chun-Han Ko, Hsin-Chuan Hsieh, ... Wen-Song Hwang

Pages 973-979

[Download PDF](#) Article preview 

Research article Full text access

Analysis of alternative road construction staging approaches to reduce carbon dioxide emissions

Jan Krantz, Weizhuo Lu, Tim Johansson, Thomas Olofsson

Pages 980-988

[Download PDF](#) Article preview 

Research article Full text access

Clean production pathways for regional power-generation system under emission constraints: A case study of Shanghai, China

Zheng Chang, Hongxiang Wu, Kexi Pan, Hanxiong Zhu, Jianmin Chen

Pages 989-1000

[Download PDF](#) Article preview 

Research article Full text access

Urban Equilibrium for sustainable cities and the contribution of timber buildings to balance urban carbon emissions: A New Zealand case study

Andrea Stocchero, Jeffrey K. Seadon, Ruth Falshaw, Michael Edwards

Pages 1001-1010

[Download PDF](#) Article preview 

Research article Full text access

Coupling of cleaner production with a day-ahead electricity market: A hypothetical case study

Luka Perković, Hrvoje Mikulčić, Luka Pavlinek, Xuebin Wang, ... Neven Duić

Pages 1011-1020

[Download PDF](#) Article preview 

Research article Full text access

A multi-objective life cycle approach for optimal building design: A case study in Finnish context

Sudip Kumar Pal, Atsushi Takano, Kari Alanne, Matti Palonen, Kai Siren

Pages 1021-1035

[Download PDF](#) Article preview 

Research article Full text access

A taxonomy of green innovators: Empirical evidence from South Korea

Fulvio Castellacci, Christine Mee Lie

Pages 1036-1047

[Download PDF](#) Article preview 

Research article Full text access

Institutionalizing sustainability: A structural equation model of sustainable procurement in US public agencies

Alexandru V. Roman

Pages 1048-1059

[Download PDF](#) Article preview 

Research article Full text access

Techno-economic analysis of blanking punch life improvement by environment friendly cryogenic treatment

Gurnam Singh, Simranpreet Singh Gill, Manu Dogra

Pages 1060-1068

[Download PDF](#) Article preview 

Research article Full text access

Environmental and social life cycle assessment of bamboo bicycle frames made in Ghana

Eric Ofori Agyekum, K.P.J. (Karen) Fortuin, Eugenie van der Harst

Pages 1069-1080

[Download PDF](#) Article preview 

Research article Full text access

Rejuvenation of vacuum tower bottoms through bio-derived materials for use in paving flexible roadways

Joseph H. Podolsky, Ashley Buss, R. Christopher Williams, Nacú Hernández, Eric W. Cochran

Pages 1081-1093

[Download PDF](#) Article preview 

Research article Full text access

An input-output simulation model for assessing production and environmental waste in construction

Hamed Golzarpoor, Vicente González, Mehdi Shahbazpour, Michael O'Sullivan

Pages 1094-1104

[Download PDF](#) Article preview 

Research article Full text access

The importance of including secondary effects when defining the system boundary with life cycle perspective: Case study for design of an external wall

Peter Ylmén, Johanna Berlin, Kristina Mjörnell, Jesper Arfvidsson

Pages 1105-1113

[Download PDF](#) Article preview   page 1 of 2  [Previous vol/issue](#)[Next vol/issue](#) 

ISSN: 0959-6526

Copyright © 2021 Elsevier Ltd. All rights reserved



Copyright © 2021 Elsevier B.V. or its licensors or contributors.
ScienceDirect® is a registered trademark of Elsevier B.V.



Journal of Cleaner Production

Co-Editors-in-Chief

J. Klemeš
Pázmány Péter Catholic University, Budapest, Hungary. E-mail: j.klemes.JCLEPRO@outlook.com
R. Lozano
Utrecht University, Utrecht, Netherlands. E-mail: editorinchief@jclp.org-sustainability.com

Founder and Editor-in-Chief Emeritus

D. Huisingsh, University of Tennessee, Knoxville, Tennessee, USA. E-mail: donalduisingh@comcast.net

Executive Editor and Review Editor

C.M.V.B Almeida, Paulista University, São Paulo, Brazil.

Executive Editor and Special Issue Editor

Y. Wang, Shandong University, Jinan, China.

Subject Editors:

Corporate Sustainability, CSR and Industrial Ecology

R.J. Baumgartner, Institute for Systems Science, Innovation and Sustainability Research University of Graz, Merangasse 18/I; 8010 Graz, Austria. Phone +43 316 380 3237, E-mail: rupert.baumgartner@uni-graz.at

Innovation for Sustainability

K. Urbaniec, Warsaw University of Technology, Plock, Poland. E-mail: k.urbaniec4@upcpoczta.pl; krzysztof.urbaniec@yahoo.com

Sustainable Supply Chain Management

K. Govindan, University of Southern Denmark, Odense M, Denmark. E-mail: gov@sam.sdu.dk

Sustainable Governance of Material and Energy Flows

F. Boons, University of Manchester, Manchester, England, UK. E-mail: w.eur.nl

Operations management and Decision Support tools for Sustainability

E.D.R. Santibanez Gonzalez, Universidade Federal do Sul da Bahia, Porto Seguro, Brazil. E-mail: santibanez.ernesto@gmail.com

Education and organisational change Management for sustainability

S. Caeiro, Universidade Aberta, Lisbon, Portugal. E-mail: scaeiro@uab.pt

Sustainability Assessment and Reporting

T.B. Ramos, Universidade Nova de Lisboa (Lisbon), Caparica, Portugal. E-mail: tabr@fct.unl.pt

Circular economy, industrial ecology and low carbon development

Y. Geng, Shanghai Jiaotong University, Shanghai, China.

Ecodesign and Product-Service System

M. Lindahl, Linköping University, Linköping, Sweden.

T. Sakao, Linköping University, Linköping, Sweden.

Advanced and Sustainable Manufacturing

M. Jin, University of Tennessee - Knoxville, Knoxville, Tennessee, USA.

Regional Sustainable Development Initiatives and Transformations

X. Zhang, City University of Hong Kong, Hong Kong, China.

Industrial Applications and Sustainable Engineering

S. R. Wan Alwi, Universiti Teknologi Malaysia, Johor Bahru, Malaysia. E-mail: syarifah@utm.my

Asian Approaches to Cleaner Production Research and Implementation

L. Shi, Tsinghua University, China. E-mail: slone@tsinghua.edu.cn

Associate Editor

B. Chen, State key Joint Laboratory of Environmental Simulation and Pollution Control School of Environment, Beijing Normal University, 19 Xijiekouwai Street, Haidian District, Beijing. E-mail: chenb@bnu.edu.cn

International Editorial Board

Y. Al Saleh, MASDAR Institute of Science and Technology, Abu Dhabi, United Arab Emirates

A.V. Arvanitis, Biopolitics International Organisation, Athens, Greece

N.A. Ashford, Massachusetts Institute of Technology, Cambridge, Massachusetts, USA

L. Baas, Linköping University, Linköping, Sweden

V. Blok, Wageningen Universiteit, Wageningen, Netherlands

S.H. Bonilla, Universidade Paulista, São Paulo, Brazil

P. Cerin, Umeå School of Business, Umeå, Sweden

N-B. Chang, University of Central Florida, Orlando, Florida, USA

A.S.F. Chiu, De La Salle University, Manila, Philippines

K. Christiansen, Dansk Standard, Charlottenlund, Denmark

G.N. Demirer, Middle East Technical University (METU), Ankara, Turkey

P.D. Eagan, University of Wisconsin at Madison, Madison, Wisconsin, USA

S. El-Haggar, American University in Cairo, New Cairo, Egypt

G. Finnveden, KTH Royal Institute of Technology, Stockholm, Sweden

B.F. Giannetti, Paulista University, São Paulo, Brazil

S. Gold, Nottingham University Business School, Nottingham, England, UK

O.J. Hanssen, Stiftelsen Ostfoldforskning, Frederikstad, Norway

J. Haselip, Danmarks Tekniske Universitet (DTU), Roskilde, Denmark

G.M. Hilson, University of Surrey, Guildford, Surrey, England, UK

G. Hyfantis JR, Quantum Environmental & Engineering Services, LLC, Knoxville, Tennessee, USA

V.J. Jegatheesan, Royal Melbourne Institute of Technology, Melbourne, Victoria, Australia

B. Kothuis, BECO -, Cape Town, South Africa

Y. Liu, University of Vaasa, Vaasa, Finland

C. Luttrupp, KTH Royal Institute of Technology, Stockholm, Sweden

D. Mebratu, UNEP-ROA, Nairobi, Kenya

G. Miller, Waste Management and Research Center, Champaign, Illinois, USA

M. Overcash, Department of Industrial and Manufacturing Engineering Wichita State University, Wichita, KS, USA

D. Reeve, Cleaner Production Australia, Eltham, Victoria, Australia

A. Rodríguez-Abitia, Procuraduría Federal de Protección al Ambiente, Del. Tlalpan, Mexico

S. Schaltegger, Leuphana University of Lüneburg, Lüneburg, Germany

H. Schnitzer, Technische Universität Graz, Graz, Austria

M. Song, Anhui University of Finance and Economics, Anhui Bengbu, China

L. Stone, University of Auckland, Auckland, New Zealand

M. Suzuki, Sophia University, Tokyo, Japan

R. Tang, Zhejiang University, Hangzhou, China

S. Thorneloe, U.S. Environmental Protection Agency (EPA), Research Triangle Park, North Carolina, USA

V. Upadhyayula, U.S. Environmental Protection Agency (EPA), Cincinnati, Ohio, USA

B. van Hoof, Universidad de Los Andes, Bogotá, Colombia

P.J. Vergragt, Tellus Institute, Boston, Massachusetts, USA

H. von Blottnitz, University of Cape Town, Cape Town, South Africa

Z. Zhang, Beijing Normal University, Beijing, China

G. Zilahy, Corvinus University of Budapest, Budapest, Hungary



Document details

1 of 1

[Export](#) [Download](#) [More...](#)

Journal of Cleaner Production
Volume 143, 1 February 2017, Pages 882-893

Minimizing economic and environmental impacts through an optimal preventive replacement schedule: Model and application (Article)

Afrinaldi, F., Taufik, Tasman, A.M., Zhang, H.-C., Hasan, A.

[View additional authors](#)

[Save all to author list](#)

^aDepartment of Industrial Engineering, Andalas University, Limau Manis, Padang, 25163, Indonesia

^bDepartment of Industrial Engineering, Texas Tech University, Lubbock, TX 79409-3061, United States

[View additional affiliations](#)

Abstract

This paper presents a mathematical model to determine the optimal schedule of preventive replacement of a component such that the economic and environmental impacts of the component are minimized. For the economic dimension, the model minimizes the operation, failure and replacement costs of the component. From the environmental perspective, the model aims to minimize the environmental impact associated with the use phase and action taken to replace the component. The model is made general and can accommodate any environmental impact category. Due to the complexity of the objective functions of the model, genetic algorithm (GA) is proposed to find the optimal solutions. To reduce GA search space, upper and lower bounds of the solutions are determined based on the numerical analysis of the first derivatives of the objective functions of the model. To show the applicability of the model, a case study aiming to minimize total expected cost and global warming potential (GWP) of a bus tire is presented. The results of the case study show that the optimal preventive replacement schedule minimizing total expected cost per km is when the tire reaches 17,700 km and the schedule minimizing total expected GWP per km is when the tire reaches 19,500 km. The schedules result in US\$23 and 0.2 kg CO₂-eq savings in the total expected cost and GWP per tire. The solutions of the multi-objective optimization problem indicate that a 1000 km increase in the optimal schedule minimizing total cost will result in a 0.4% increase in the total expected cost and a 0.002% reduction in the total expected GWP of the tire. The sensitivity analysis presents that 1% reduction in the operation cost and fuel consumption contributes to a 0.91% reduction in the total expected cost and 0.99% reduction in the total expected GWP, respectively. © 2016 Elsevier Ltd

SciVal Topic Prominence

Topic: Global Warming Potential | Cogeneration Plants | Power Markets

Prominence percentile: 35.090



Author keywords

[Economic impact](#) [Environmental impact](#) [Maintenance](#) [Modeling](#) [Scheduling](#)

Indexed keywords

Cited by 18 documents

Otić, G. , Momčilović, O. , Radovanović, L.

Mathematical analysis of criteria for maintenance of technical systems in the function of achieving sustainability

(2021) *Sustainability* (Switzerland)

Franciosi, C. , Voisin, A. , Miranda, S.

Measuring maintenance impacts on sustainability of manufacturing industries: from a systematic literature review to a framework proposal

(2020) *Journal of Cleaner Production*

Jasiulewicz-Kaczmarek, M. , Legutko, S. , Kluk, P.

Maintenance 4.0 technologies - new opportunities for sustainability driven maintenance

(2020) *Management and Production Engineering Review*

[View details of all 18 citations](#)

Inform me when this document is cited in Scopus:

[Set citation alert](#)

[Set citation feed](#)

Related documents

Find more related documents in Scopus based on:

[Authors](#) [Keywords](#)

Engineering controlled terms:

Carbon dioxide

Cost benefit analysis

Cost reduction

Costs

Economic and social effects

Genetic algorithms

Global warming

Maintenance

Models

Multiobjective optimization

Optimization

Scheduling

Sensitivity analysis

Tires

Engineering uncontrolled terms

Economic impacts

Global warming potential

Multi-objective optimization problem

Objective functions

Preventive replacements

Replacement costs

Total expected costs

Upper and lower bounds

Engineering main heading:

Environmental impact

ISSN: 09596526

CODEN: JCROE

Source Type: Journal

Original language: English

DOI: 10.1016/j.jclepro.2016.12.033

Document Type: Article

Publisher: Elsevier Ltd

 Afrinaldi, F.; Department of Industrial Engineering, Andalas University, Limau Manis, Padang, Indonesia;

© Copyright 2017 Elsevier B.V., All rights reserved.

About Scopus

What is Scopus

Content coverage

Scopus blog

Scopus API

Privacy matters

Language

日本語に切り替える

切换到简体中文

切换到繁體中文

Русский язык

Customer Service

Help

Contact us



SJR

Scimago Journal & Country Rank

Enter Journal Title, ISSN or Publisher Name

[Home](#)[Journal Rankings](#)[Country Rankings](#)[Viz Tools](#)[Help](#)[About Us](#)

Ads by Google

[Stop seeing this ad](#)[Why this ad? ⓘ](#)

Journal of Cleaner Production

COUNTRY[Netherlands](#)Universities and research
institutions in Netherlands**SUBJECT AREA AND
CATEGORY**[Business,
Management and
Accounting
Strategy and
Management](#)[Energy
Renewable
Energy,
Sustainability and
the Environment](#)[Engineering
Industrial and
Manufacturing
Engineering](#)[Environmental
Science
Environmental
Science
\(miscellaneous\)](#)**PUBLISHER**[Elsevier Ltd.](#)**H-INDEX****173****PUBLICATION TYPE**[Journals](#)**ISSN**

09596526, 18791786

COVERAGE

1993-2020

INFORMATION[Homepage](#)[How to publish in this
journal](#)[Contact](#)

Ads by Google

Stop seeing this ad

Why this ad? ⓘ



Ads by Google

Stop seeing this ad

Why this ad? ⓘ

SCOPE

The Journal of Cleaner Production is an international, transdisciplinary journal focusing on Cleaner Production, Environmental, and Sustainability research and practice. Through our published articles, we aim at helping societies become more sustainable. 'Cleaner Production' is a concept that aims at preventing the production of waste, while increasing efficiencies in the uses of energy, water, resources, and human capital. The Journal of Cleaner Production serves as a platform for addressing and discussing theoretical and practical cleaner production, encompassing environmental, and sustainability issues in corporations, governments, education institutions, regions, and societies. Subject areas include, but are not limited to: -Cleaner production and technical processes -Sustainable Development and Sustainability -Sustainable Consumption -Environmental and sustainability assessment -Sustainable Products and Services -Corporate sustainability and Corporate Social Responsibility -Education for Sustainable Development -Governance, legislation, and policy for sustainability

 Join the conversation about this journal



Ads by Google

Stop seeing this ad

Why this ad? ⓘ



FIND SIMILAR JOURNALS ?



1 Sustainable Production and Consumption NLD 86% similarity	2 Management of Environmental Quality GBR 57% similarity	3 Resources, Conservation and Recycling NLD 55% similarity	4 Clean Techn Environmen' DEU 4 s
---	--	--	--





←

Ads by Google

Stop seeing this ad

Why this ad? ⓘ

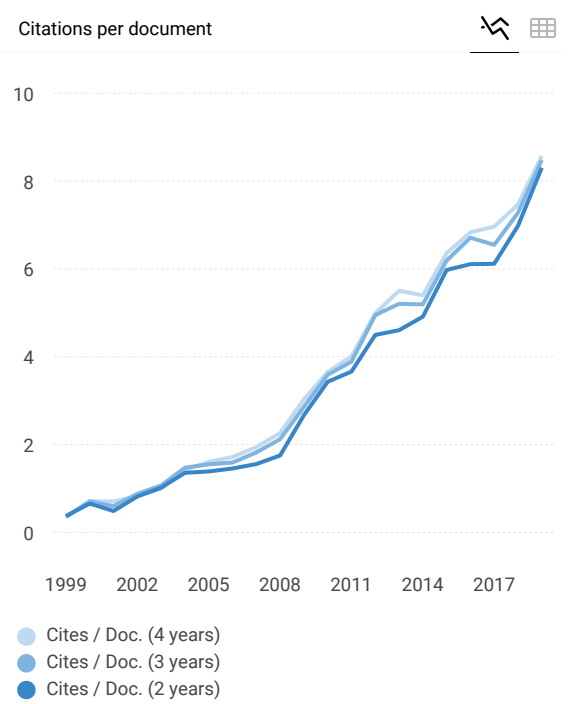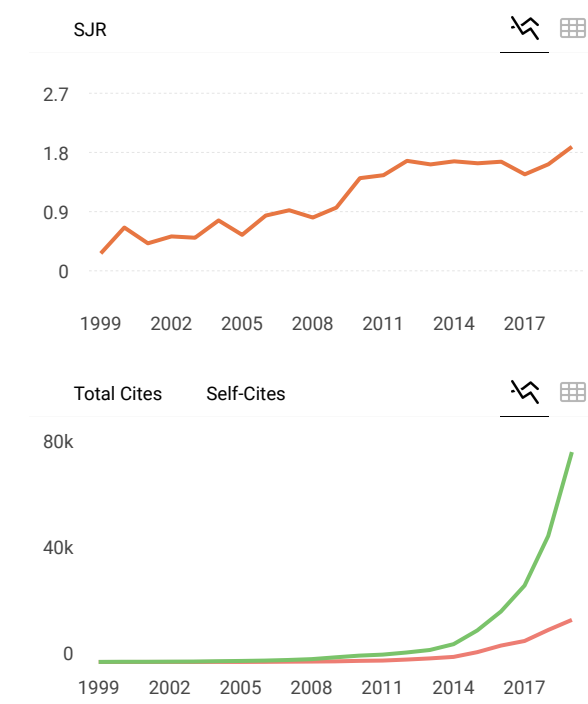

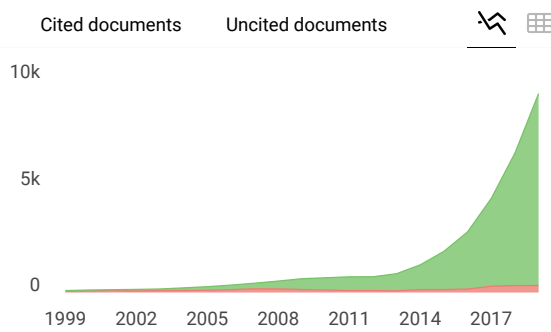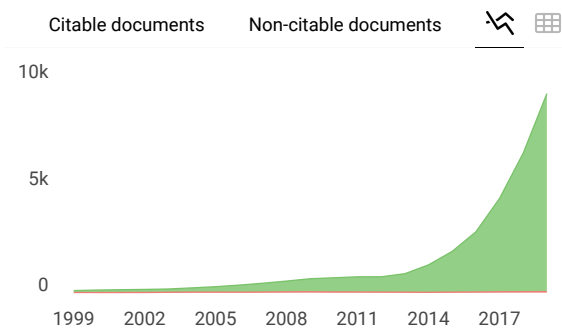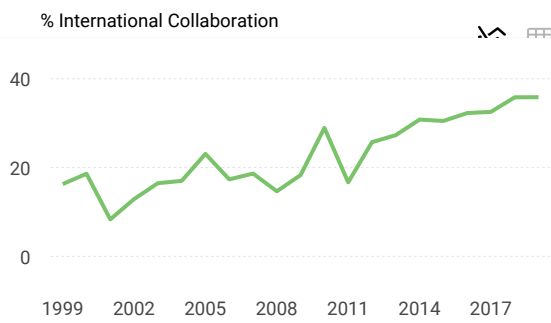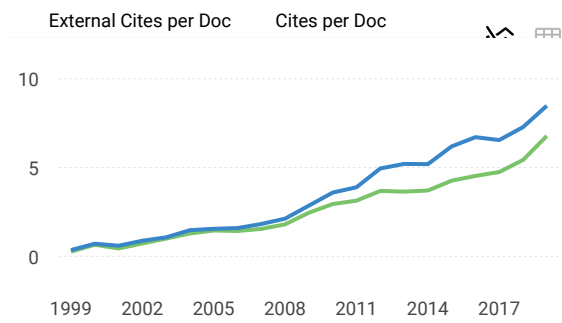

← Show this widget in your own website

Just copy the code below and paste within your html code:

```
<a href="https://www.scimagojr.com/journalsearch.php?q=19167&tip=sid" data-bbox="261 449 410 463">
```

Ads by Google

Stop seeing this ad

Why this ad? ⓘ

Metrics based on Scopus® data as of April 2020

A **AZIZUL KHOLIS** 1 week ago

Dear

please inform me, about the Celaner production journal, is it a specialis for environment issues only?

Regards

reply



Melanie Ortiz 1 week ago

Dear Azizul,
thank you for contacting us.

SCImago Team

Unfortunately, we cannot help you with your request, we suggest you visit the journal's homepage or contact the journal's editorial staff , so they could inform you more deeply.
Best Regards, SCImago Team

N **Nuryusnita** 4 months ago

Good day

May I know where to check for how many issues published by certain journal publication?

thank you

Regard,
Yusnita

reply



Melanie Ortiz 4 months ago

SCImago Team

Dear Nuryusnita,
thank you for contacting us.
We suggest you consult that information in the journal's website.
Best Regards, SCImago Team

Y **Yolanda Bermudez** 6 months ago

Dear Sr. Could you tell me when you will receive articles? We are interesting to send you an article about Circular economy and strategy.

Thanks
Yolanda Bermúdez

reply



Melanie Ortiz 5 months ago

SCImago Team

Dear Yolanda,
thank you for contacting us.
We are sorry to tell you that SCImago Journal & Country Rank is not a journal. SJR is a portal with scientometric indicators of journals indexed in Elsevier/Scopus.
Unfortunately, we cannot help you with your request, we suggest you visit the journal's homepage (See submission/author guidelines) or contact the journal's editorial staff , so they could inform you more deeply.
Best Regards, SCImago Team

A **amir** 9 months ago

dear Admin
Hello

how can i find 2019 and 2020 quartile in your website?

reply



Melanie Ortiz 9 months ago

SCImago Team

Dear Amir,

Thank you for contacting us. Our data come from Scopus, they annually send us an update of the data. This update is sent to us around April / May every year. Thus, the indicators for 2019 will be available in June 2020. Best Regards, SCImago Team

C **chakim** 10 months ago

Dear editorial staff

I am writing journal for my study in Universitas Esa Unggul, Indonesia.
It is very difficult to find journal with title :

Huang, X.X.; Hu, Z.P.; Liu, C.S.; Yu, D.J., and Yu, L.F., 2016.
An examination of corporate reporting environmental management practices and firm performance. Journal of Cleaner Production, 112, 3456-3433.

Can you help me to find this journal in this proquest search.

Thank you

reply

D **DK** 9 months ago

Not sure if this is what you are looking for.

<https://doi.org/10.1016/j.jom.2006.10.003>



Melanie Ortiz 10 months ago

SCImago Team

Dear Sir/Madam,

thank you for contacting us.

We are sorry to tell you that SCImago Journal & Country Rank is not a journal. SJR is a portal with scientometric indicators of journals indexed in Elsevier/Scopus.

Unfortunately, we cannot help you with your request, we suggest you to contact the journal's editorial staff , so they could inform you more deeply.

Best Regards, SCImago Team

D **dina zaman** 1 year ago

Can anyone throw some light on the word limit for a review article in this journal. The author information guide states that the limit is 12000 words, but does not mention if it includes the references, abstract, tables etc.

thanks

reply

D **David Ruiz** 1 year ago

They are between 6000-8000 words without references, counting tables and figures.



Melanie Ortiz 1 year ago

SCImago Team

Dear Dina

thank you for contacting us. We suggest you to contact the journal's editorial staff , so they could inform you more deeply. Best Regards, SCImago Team

Y **yousr** 2 years ago

subscribe

reply

Leave a comment

Name

Email

(will not be published)



I'm not a robot

reCAPTCHA
Privacy - Terms

Submit

The users of Scimago Journal & Country Rank have the possibility to dialogue through comments linked to a specific journal. The purpose is to have a forum in which general doubts about the processes of publication in the

journal, experiences and other issues derived from the publication of papers are resolved. For topics on particular articles, maintain the dialogue through the usual channels with your editor.

Developed by:



Powered by:



Follow us on @ScimagoJR

Scimago Lab, Copyright 2007-2020. Data Source: Scopus®

EST MODUS IN REBUS

Horatio (Satire 1, 1, 106)

JCLP - Minimizing

by Feri Afrinaldi

Submission date: 18-Feb-2021 02:07PM (UTC+0800)

Submission ID: 1512108970

File name: bkd_kinerja_198209202006041002_2_20180809093434_724.pdf (1.27M)


Word count: 9498

Character count: 46270



Contents lists available at ScienceDirect

Journal of Cleaner Production

journal homepage: www.elsevier.com/locate/jclepro

Minimizing economic and environmental impacts through an optimal preventive replacement schedule: Model and application

Feri Afrinaldi^{a,*}, Taufik^a, Andrea Marta Tasman^a, Hong-Chao Zhang^b, Alizar Hasan^a^a Department of Industrial Engineering, Andalas University, Limau Manis, Padang 25163, Indonesia^b Department of Industrial Engineering, Texas Tech University, Lubbock, TX 79409-3061, USA

ARTICLE INFO

Article history:

Received 15 April 2016

Received in revised form

7 December 2016

Accepted 8 December 2016

Available online 10 December 2016

Keywords:

Economic impact

Environmental impact

Maintenance

Modeling

Scheduling

ABSTRACT

This paper presents a mathematical model to determine the optimal schedule of preventive replacement of a component such that the economic and environmental impacts of the component are minimized. For the economic dimension, the model minimizes the operation, failure and replacement costs of the component. From the environmental perspective, the model aims to minimize the environmental impact associated with the use phase and action taken to replace the component. The model is made general and can accommodate environmental impact category. Due to the complexity of the objective functions of the model, genetic algorithm (GA) is proposed to find the optimal solutions. To reduce GA search space, upper and lower bounds of the solutions are determined based on the numerical analysis of the first derivatives of the objective functions of the model. To show the applicability of the model, a case study aiming to minimize total expected cost and global warming potential (GWP) of a bus tire is presented. The results of the case study show that the optimal preventive replacement schedule minimizing total expected cost per km is when the tire reaches 17,700 km and the schedule minimizing total expected GWP per km is when the tire reaches 19,500 km. The schedules result in US\$23 and 0.2 kg CO₂-eq savings in the total expected cost and GWP per tire. The solutions of the multi-objective optimization problem indicate that a 1000 km increase in the optimal schedule minimizing total cost will result in a 0.4% increase in the total expected cost and a 0.002% reduction in the total expected GWP of the tire. The sensitivity analysis presents that 1% reduction in the operation cost and fuel consumption contributes to a 0.91% reduction in the total expected cost and 0.99% reduction in the total expected GWP, respectively.

© 2016 Elsevier Ltd. All rights reserved.

1. Introduction

Natural resources depletion, pollution, global warming and other environmental problems have seized global attention (Chang et al., 2014). Furthermore, according to Hallstedt et al. (2015), environmental issues are not the only issues that attract much attention. Sustainability issues involving environmental, economic, and social impacts have also become a global concern and there is an urgent need to ease and reduce the severity of those impacts. This has an influence on how maintenance activity is seen. In the past maintenance was just viewed as an activity to restore the desired functionality of equipment (Jardine and Tsang, 2013). Now the view on maintenance has evolved to an activity that should

contribute to the minimization of environmental impact, reduction of life cycle costs, and enhancement of socioeconomic well-being. The capacity of maintenance to support sustainability awareness can be seen from its capability in minimizing energy consumption, reducing total cost of ownership, and promoting safety.

There have been many studies aiming to optimize maintenance activities so that the total cost of ownership is minimized. A collection of maintenance and replacement mathematical models minimizing the total cost can be found in Feldman and Valdez-Flores (2010) and Jardine and Tsang (2013). Feldman and Valdez-Flores (2010) presented age replacement models considering discrete and continuous life times. The decision variable of the models is the replacement age and the objective function is the minimization of the long-run average daily cost. Similarly, one of the models found in Jardine and Tsang (2013) is the optimal preventive replacement age model subject to breakdown. The model balances the benefit obtained from preventive replacement and its cost. The objective function of the model is to minimize the total

* Corresponding author. Department of Industrial Engineering, Andalas University, Limau Manis, Padang 25163, Indonesia. Tel.: +62 812 87291352.

E-mail address: feri_afrinaldi@ft.unand.ac.id (F. Afrinaldi).

<http://dx.doi.org/10.1016/j.jclepro.2016.12.033>

0959-6526/© 2016 Elsevier Ltd. All rights reserved.

expected cost per unit time and the decision variable is the replacement age.

However, most literature relating maintenance and environmental issues is intended merely to assess the environmental impact of maintenance activities for specific cases. Minne and Crittenden (2015) assessed the environmental impact of residential flooring maintenance. According to the study, ignoring the economic and environmental impacts of the maintenance activity is a major error in comparing flooring choices. In the context of residential flooring, the increase in the intensity of the maintenance activity produces 31%–114% and 30%–49% increases in the environmental impact and cost, respectively. Studies evaluating the environmental impact of pavement systems maintenance activities can be easily found in the literature. Elghali et al. (2006) utilized life cycle assessment (LCA) and multi-criteria decision analysis in choosing the best option for highway maintenance. Giustozzi et al. (2012) also presented a decision support tool that can be used to compare and choose the best strategy for road maintenance. Three criteria were used by the study, environmental impact, cost, and pavement performance. Noland and Hanson (2015) applied LCA method in assessing the amount of greenhouse gas emissions of a road reconstruction. The study found that maintenance activity has a 10% contribution to the total emissions. Study relating product design and the concept of green maintenance can be found in Ajukumar and Gandhi (2013). The study proposed a methodology combining graph theory and multi-criteria decision making to select an optimal design of mechanical systems from the perspective of green maintenance.

Research linking reliability and maintainability with the level of environmental impact of a system can be found in Sikos and Klemes (2009) and Liu et al. (2016). Sikos and Klemes (2009) related system reliability and maintainability with the effort to minimize waste. The authors concluded that the reliability and maintainability of a waste management system play a major role in achieving cleaner processing. In order to reduce the impact of the replacement activity to the environment, Liu et al. (2016) presented a remanufacturing timing model minimizing global warming potential of a component based on the reliability and replacement theories. However, this study did not consider the decline in the performance of the component as it ages and the expected length of the use phase in computing the global warming potential of the use phase.

Based on the above literature, it is concluded that maintenance and replacement activities have a significant role in reducing the economic and environmental impacts of a product or system. However, the literature also shows that research aiming to determine the optimal timing of replacement and maintenance actions such that product's environmental and economic impacts are minimized is still limited. This paper aims to fill this gap. Its goal is to develop a mathematical model optimizing the preventive replacement schedule so that the total economic and environmental impacts of an asset are minimized. The developed model is a generic model that can be applied to any technology and product. The model is more geared to long-term planning and decision making.

2. Problem statement and objective

If a component of particular equipment suddenly fails, it needs to be replaced in order to keep the equipment working properly. Since the failure is a random event, then there is a reason to assume that the failure replacement is more expensive than a preventive replacement (Jardine and Tsang, 2013). For example, a company might stop the production because of a sudden failure and this delay might have an economic consequence. The economic consequence can be minimized if the company adopts a preventive replacement policy. In designing the policy, the company needs to

balance the benefit obtained from the reduction in the frequency of failure replacements and the cost paid due to preventive replacement actions. The increase in the frequency of preventive replacement (a shorter interval between preventive replacements) causes a higher preventive replacement cost. Since the cost increases then this may not be a desirable situation. However, a shorter interval between preventive replacements will decrease the probability of a failure. This means a lower failure replacement cost and is a desirable situation. Another type of cost involved is the operation cost. The amount of the cost depends on the length of the use phase, working condition, and the efficiency of the component.

If an environmental dimension is added to the aforementioned cost problem, there will be two categories of environmental impact associated with the problem, the environmental impact of using the current component and the environmental impact related to the new component used as a replacement. The decision on when a preventive replacement should be done affects the total environmental impact produced by both components (component currently in service and replacement component). The decrease in the frequency of preventive replacement (a longer interval between preventive replacements) causes a lower environmental impact because fewer replacement components are used. In the opposite, it increases the environmental impact of the use phase of current component because of a longer operation period. The impact becomes more severe if the performance of the component declines as it ages. An automobile is a good example, when it is new, it has a good fuel economy, but as it ages, the fuel consumption per kilometer may increase.

In Fig. 1, it can be seen that there is a conflicting situation for each dimension. The question is at what age a preventive replacement should be done so that the cost and environmental impact produced by the component are minimized. The answer to this question depends on the characteristic of the component, such as its failure rate, and the amount of the economic and environmental consequences caused by the use phase, failure, and preventive replacement actions.

This study aims to build a mathematical model to solve the aforementioned conflicting situations. The decision variable of the model is the preventive replacement schedule of the component and the objective functions are to minimize the economic and environmental impacts of the component. The developed model is a general model designed to be able to accommodate any environmental impact category. If one wants to use the model, he/she can use one of the mid-point impact categories (abiotic depletion, global warming potential, ozone layer depletion, eutrophication, acidification, photochemical oxidation, human toxicity, or ecotoxicity) or one of the end-point impact categories (damage to human health, eco system quality or resources). To quantify selected environmental impact, LCA method can be implemented. The economic impact can be quantified using available costing methodology such as life cycle costing (LCC) method.

Clearly, from a mathematical standpoint, it is a multi-objective optimization problem. A procedure to find the best solution to this multi-objective problem is provided. A case study discussing the application of the model is presented. The effect of changes in the parameters of the model on current optimal solutions will also be discussed through a sensitivity analysis.

3. Material and methods

3.1. Cost minimization

To formulate the problem, let's define the following variables:

x = a random variable denoting time to failure of a component

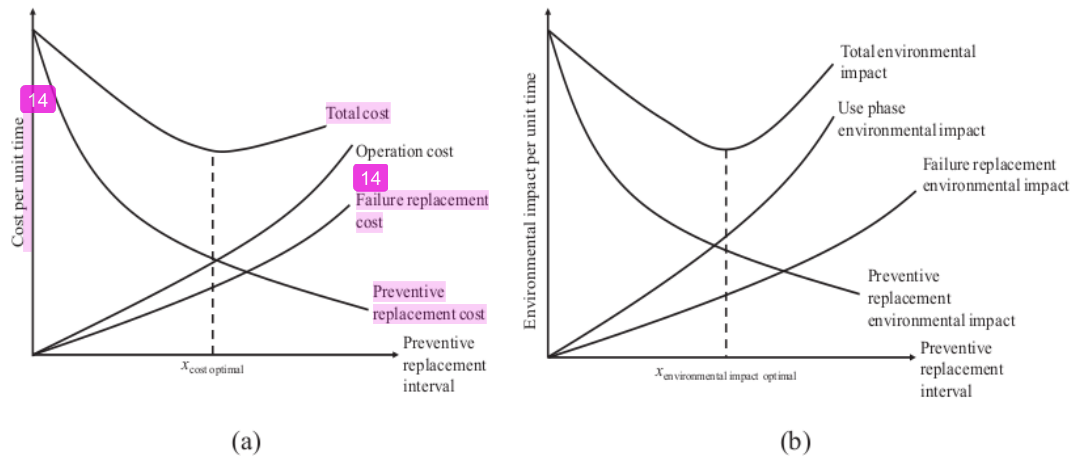


Fig. 1. Optimal preventive replacement interval, (a) cost minimization, (b) environmental impact minimization.

$f(x)$ = failure probability density function of the component
 $F(x)$ = cumulative distribution function of the failure,
 $F(x) = \int_0^x f(x)dx$

x_c = preventive replacement schedule for cost minimization problem which means that, for the cost minimization problem, a preventive replacement action must be done when the age of the component is x_c .

As previously described, two possible events can occur, failure replacement and preventive replacement, see Fig. 2(a) (adjusted from Jardine and Tsang, 2013).

Event 1 – the component is still working when x_c is reached. It means that a preventive replacement needs to be done at x_c . If a preventive replacement action is taken, only replacement cost needs to be paid. There is no failure replacement cost because the preventive replacement is scheduled. The replacement cost, denoted as c_p , is the cost of a new component used to replace the component which is currently in use.

Event 2 – the component fails before reaching x_c . In Fig. 2(a), it is


illustrated that the component fails at $x_f < x_c$. In this case, a failure replacement action is taken. Therefore, there are two types of cost that need to be paid, replacement cost c_r and failure cost c_f . The failure cost is the loss of profit due to a failure or unplanned replacement.

Since preventive replacement is done even though the component is still working when x_c is reached, then the probability of a preventive replacement is given by the shaded region of Fig. 2(b), denoted as $R(x_c)$. Knowing the fact that the total probability is one then the probability of a failure replacement is given by the area of the unshaded region of Fig. 2(b), denoted as $F(x_c)$. In reliability theory, $R(x_c) = 1 - F(x_c)$ is known as the survival distribution function. Therefore, total expected replacement cost is given by the following (Jardine and Tsang, 2013; Feldman and Valdez-Flores, 2010):


Total expected replacement cost = expected preventive replacement cost + expected failure replacement cost = $c_r R(x_c) + (c_r + c_f) F(x_c) = c_r + c_f F(x_c)$.

Now let's define $L(x_c)$ as the expected length of the use phase. It is given by the following (Jardine and Tsang, 2013):


Event 1: Preventive replacement

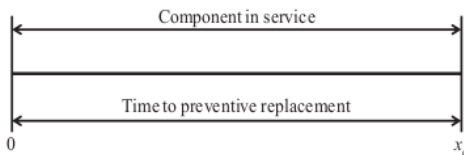

Event 2: Failure replacement

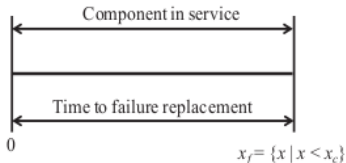

(a)

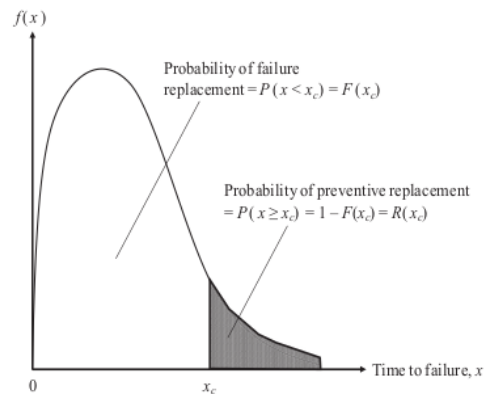

(b)

Fig. 2. Preventive and failure replacements and their probability distributions, (a) preventive and failure replacements, (b) probability distributions.

$$L(x_c) = x_c R(x_c) + M(x_c) F(x_c)$$

$M(x_c)$ is the expected length of time to failure if the preventive replacement is scheduled at x_c and is given by the following (Jardine and Tsang, 2013):

$$M(x_c) = \frac{1}{1 - R(x_c)} \int_0^{x_c} x f(x) dx$$

Therefore, the expected length of the use phase can be rewritten as:

$$L(x_c) = x_c R(x_c) + \int_0^{x_c} x f(x) dx \quad (1)$$

Furthermore, let's define $c_u(x)$ as the operation cost per unit time at time x , such as fuel consumption cost per unit time when the age of the component is x years. It is easy to see that $Z_c(x_c)$, total expected cost per unit time if the preventive replacement is scheduled at x_c , is as follows:

$$Z_c(x_c) = \frac{c_r + c_f F(x_c) + \int_0^{L(x_c)} c_u(x) dx}{L(x_c)} \quad (2)$$

Following Feldman and Valdez-Flores (2010), the first derivative of $Z_c(x_c)$ with respect to x_c is derived. Setting the derivative equals to zero, the following relationship is obtained:

$$\frac{c_r}{c_f} = \frac{1}{c_f} \left[\left[c_f h(x_c) + c_u(L(x_c)) \right] L(x_c) - \int_0^{L(x_c)} c_u(x) dx \right] - F(x_c) \quad (3)$$

where:

$$h(x_c) = \frac{f(x_c)}{1 - F(x_c)}$$

If $c_u(x) = a_c x + b_c$, then equation (3) can be simplified as the following:

$$\frac{c_r}{c_f} = \frac{1}{c_f} L(x_c) \left[c_f h(x_c) + \frac{a_c}{2} L(x_c) \right] - F(x_c) \quad (4)$$

a_c is the increase in operation cost with use and b_c is the operation cost during the use phase. In reliability theory, $h(x)$ is known as a failure rate function. x_c satisfying equation (4) is defined as x_c^* , indicating the optimal schedule of preventive replacement such that the total cost per unit time is minimized. If equation (4) is difficult to solve analytically, in Section 3.3, a procedure to find a solution for equation (4) is proposed.

In order to have a unique solution, it is required that the right-hand side of equation (4) to be an increasing function or its first derivative is positive. The requirement is satisfied and presented by the following:

Let $A(x_c)$ be the right-hand side of equation (4), then,

$$A'(x_c) = L(x_c) \left[h'(x_c) + \frac{a_c}{c_f} R(x_c) \right] > 0$$

One important note is that $A'(x_c)$ will always be positive if $h'(x_c)$ is positive, meaning that the failure rate function, $h(x_c)$, needs to be an increasing function too.

3.2. Environmental impact minimization

Let's define x_d as the preventive replacement schedule for the environmental impact minimization problem. Two variables define the environmental impact associated with this problem. The first variable is denoted as $d_u(x)$, defined as the environmental impact per unit time of using a component at time x , such as the global warming potential (GWP) per unit time when the age of the component is x years. The second variable is the environmental impact of the replacement activity, denoted as d_r . It is the environmental impact of producing the component used as a replacement. Therefore, total expected environmental impact is given by the following equation:

Total expected environmental impact = expected environmental impact of preventive replacement + expected environmental impact of failure replacement + expected environmental impact of

using the component = $d_r R(x_d) + d_r F(x_d) + \int_0^{L(x_d)} d_u(x) dx = d_r + \int_0^{L(x_d)} d_u(x) dx$

The expected length of the use phase is denoted as $L(x_d)$. The form of this function is given by equation (1). Therefore, $Z_d(x_d)$ denoting the total expected environmental impact per unit time if the preventive replacement is scheduled at x_d is as follows:

$$Z_d(x_d) = \frac{d_r + \int_0^{L(x_d)} d_u(x) dx}{L(x_d)} \quad (5)$$

Similar to the cost minimization problem, the first derivative of $Z_d(x_d)$ with respect to x_d is derived. Setting the derivative equals to zero, equation (6) is obtained.

$$d_u(L(x_d)) L(x_d) = \left[d_r + \int_0^{L(x_d)} d_u(x) dx \right] \quad (6)$$

If $d_u(x) = a_d x + b_d$, then equation (6) can be simplified as the following:

$$\frac{2d_r}{a_d} = L^2(x_d) = \left(x_d R(x_d) + \int_0^{x_d} x f(x) dx \right)^2 \quad (7)$$

a_d is the increase in the amount of environmental impact with use and b_d is the amount of environmental impact during the use phase. x_d satisfying equation (7) is defined as x_d^* , the optimal schedule of preventive replacement such that the total environmental impact per unit time is minimized. If equation (7) cannot be solved analytically, the step-by-step procedure to find a solution for equation (7) is proposed in Section 3.3.

Similar to the cost minimization problem, in order to have a unique optimal solution, the right-hand side of equation (7) needs to be an increasing function or its first derivative is positive. Let's define $B(x_d)$ as the right-hand side of equation (7) and $B'(x_d)$ is presented by the following:

$$B'(x_d) = 2L(x_d)R(x_d) > 0$$

3.3. Methodology to find a solution when x_c^* and x_d^* cannot be solved analytically from equations (4) and (7)

3.3.1. Step 1: Solve the cost minimization problem

Let x_c^{lb} and x_c^{ub} be the lower and upper bounds for the optimal solution of the cost minimization problem, x_c^* . x_c^{lb} and x_c^{ub} are determined numerically. Using x_c^{lb} , x_c^{ub} , and equation (2), a constrained minimization problem given by equation (8) is obtained.

$$\begin{aligned} \text{Minimize } & Z_c(x_c) \\ \text{Subject to } & x_c \geq x_c^{lb}, -x_c \geq -x_c^{ub}, \text{ and } x_c \geq 0 \end{aligned} \quad (8)$$

For the above problem, the Lagrangean and Karush-Kuhn-Tucker (KKT) necessary conditions are the following:

Lagrangean:

$$Y_c = Z_c(x_c) + \lambda_{1c}(x_c^{lb} - x_c) + \lambda_{2c}(-x_c^{ub} + x_c) \quad (9)$$

KKT conditions:

$$\begin{aligned} \frac{\partial Y_c}{\partial x_c} = \frac{dZ_c(x_c)}{dx_c} - \lambda_{1c} + \lambda_{2c} &\geq 0, \quad x_c \geq 0, \quad x_c \frac{\partial Y_c}{\partial x_c} = 0 \\ \frac{\partial Y_c}{\partial \lambda_{1c}} = x_c^{lb} - x_c &\leq 0, \quad \lambda_{1c} \geq 0, \quad \lambda_{1c} \frac{\partial Y_c}{\partial \lambda_{1c}} = 0 \\ \frac{\partial Y_c}{\partial \lambda_{2c}} = -x_c^{ub} + x_c &\leq 0, \quad \lambda_{2c} \geq 0, \quad \lambda_{2c} \frac{\partial Y_c}{\partial \lambda_{2c}} = 0 \end{aligned} \quad (10)$$

λ_{1c} and λ_{2c} are the Lagrangean multipliers. It is known that $x_c > 0$ because it does not make sense to replace the component when it is still new. This implies that $\frac{\partial Y_c}{\partial x_c} = 0$. $x_c^{lb} - x_c$ and $-x_c^{ub} + x_c$ are not zeros and therefore λ_{1c} , $\lambda_{2c} = 0$. These reduce the above KKT conditions into $\frac{dZ_c(x_c)}{dx_c} = 0$, which is given by equation (4). If equation (4) cannot be solved analytically, this paper applies Genetic Algorithm (GA) to solve the problem presented by equation (8).

However, as indicated by the literature, there are several methods available to solve the problem presented by equation (8) but there is no certainty which method will produce global minimum or maximum. Two well known deterministic gradient based methods, Generalized Reduced Gradient (GRG) and Sequential Quadratic Programming (SQP) methods can be used to solve the problem. Metaheuristic methods such as Genetic Algorithm (GA), Simulated Annealing (SA), and Tabu Search (TS) can also be used. Among the metaheuristic methods, GA has a more diverse solution population because it uses crossover and mutation operators. The diversity avoids GA to stop in a local optimum and makes it faster in finding a global optimum. A study comparing the performance of GA, GRG and SQP can be found in Yeniyay (2005). The study found that GA is highly efficient for all test problems used by the author. GRG and SQP cannot give a better solution. According to the study, GA is also preferred because it is efficient in finding an optimal solution, robust, reliable and easy to implement. Moreover, most solver products are also based on the evolutionary algorithm (Frontline Systems, 2016). GRG and SQP seek the optimum (local or global) solution based on the provided starting points and they are sensitive to them. They may trap in local optimum, depending on the values of the starting points. This makes GA very popular in applications and it is also the reason of using GA in this paper. In order to guarantee that x_c^* found by the GA is an optimal solution, we need substitute it back into the KKT conditions. It is an optimal solution if the KKT conditions are satisfied.

3.3.2. Step 2: Solve the environmental impact minimization problem

Similarly, determine the value of the lower and upper bounds, x_d^{lb} and x_d^{ub} , of the optimal solution for the environmental impact minimization problem using numerical analysis. Construct the optimization problem given by equation (11) by using the lower and upper bounds as the constraint and equation (5) as the objective function.

$$\begin{aligned} \text{Minimize } & Z_d(x_d) \\ \text{Subject to } & x_d \geq x_d^{lb}, -x_d \geq -x_d^{ub}, \text{ and } x_d \geq 0 \end{aligned} \quad (11)$$

The Lagrangean function and the KKT conditions of the above problem are given by the following.

Lagrangean:

$$Y_d = Z_d(x_d) + \lambda_{1d}(x_d^{lb} - x_d) + \lambda_{2d}(-x_d^{ub} + x_d) \quad (12)$$

KKT conditions:

$$\begin{aligned} \frac{\partial Y_d}{\partial x_d} = \frac{dZ_d(x_d)}{dx_d} - \lambda_{1d} + \lambda_{2d} &\geq 0, \quad x_d \geq 0, \quad x_d \frac{\partial Y_d}{\partial x_d} = 0 \\ \frac{\partial Y_d}{\partial \lambda_{1d}} = x_d^{lb} - x_d &\leq 0, \quad \lambda_{1d} \geq 0, \quad \lambda_{1d} \frac{\partial Y_d}{\partial \lambda_{1d}} = 0 \\ \frac{\partial Y_d}{\partial \lambda_{2d}} = -x_d^{ub} + x_d &\leq 0, \quad \lambda_{2d} \geq 0, \quad \lambda_{2d} \frac{\partial Y_d}{\partial \lambda_{2d}} = 0 \end{aligned} \quad (13)$$

λ_{1d} and λ_{2d} are the Lagrangean multipliers. The KKT conditions presented in equation (13) are reduced to $\frac{dZ_d(x_d)}{dx_d} = 0$ which is given by equation (7). If equation (7) cannot be solved analytically, GA will be used to solve equation (11) in order to find the optimum solution, x_d^* . The KKT conditions are then used to check whether x_d^* is an optimal point or not.

3.3.3. Step 3: Solve the multi-objective optimization problem

The multi-objective optimization problem to be solved is given by (14). It has two objective functions which are similar to the objective functions presented in equations (8) and (11). The decision variable is x_{cd} , defined as the schedule of preventive replacements such that cost and environmental impact are minimized.

$$\begin{aligned} \text{Minimize } & \begin{cases} Z_c(x_{cd}) \\ Z_d(x_{cd}) \end{cases} \\ \text{Subject to } & \begin{cases} x_c^* \leq x_{cd} \leq x_d^* \text{ OR } x_d^* \leq x_{cd} \leq x_c^* \\ x_c^*, x_d^*, x_{cd} \geq 0 \end{cases} \end{aligned} \quad (14)$$

There are three possibilities for the first constraint of the problem presented in equation (14), $x_c^* < x_d^*$ or $x_c^* > x_d^*$ or $x_c^* = x_d^*$. If the first case occurs, then the first constraint of (14) becomes $x_c^* \leq x_{cd} \leq x_d^*$. If the second case occurs, then the first constraint is $x_d^* \leq x_{cd} \leq x_c^*$. If $x_c^* = x_d^*$ then the solution is found, $x_c^* = x_d^* = x_{cd}^*$. x_{cd}^* denotes the optimal schedule of preventive replacements such that cost and environmental impact are minimized. If the first or second case occurs, the solution is searched using multi-objective GA.

4. Results and discussion

In this paper, the economic and environmental impacts of a bus tire are used to show the applicability of the developed model. The bus runs on a diesel engine and is owned by a public transportation

company in a city located in Indonesia. The type of the tire used by the bus is a tire with the size of 750-16. For this case study, a retreaded 750-16 tire is analyzed. Tire cost, cost due to a sudden failure of the tire (revenue loss), and fuel consumption cost during tire operation are the aspects considered for the economic dimension. Global warming potential (GWP), caused by retreading the tire and diesel fuel combustion during operation, is the impact category for the environmental dimension.

4.1. Economic and environmental data

Based on the survey conducted in the city where the company runs its business, the average price of a retreaded 750-16 tire is $c_t = \text{US\$ } 31.01$. It is also estimated that if a tire suddenly fails while the bus is in operation, a revenue of approximately $c_f = \text{US\$ } 30.77$ will be lost. In this study, the result of the LCA study on producing a retreaded tire conducted by Continental (1999) is utilized. According to the study, producing a retreaded tire will result in $d_r = 11,450 \text{ g CO}_2\text{-eq GWP}$.

According to the company record, verified by the engineers and drivers of the company, it is known that current fuel consumption rate of the bus using the tire (after running for 150,333 km) is 0.653 L/km. It is also reported that when the bus reaches 109,156 km, its fuel consumption is 0.635 L/km. It means that, assuming a linear relationship, the decrease in the fuel economy with use is $4.461 \times 10^{-7} \text{ L/km}^2$. Therefore, the diesel fuel consumption per kilometer of the bus will increase according to the following linear equation:

$$p(x) = 0.653 + 4.461 \times 10^{-7}x$$

x is the distance, in km, traveled by the bus.

The bus is powered by diesel fuel and according to US EPA (2014) the estimated GWP of diesel fuel combustion is 2694.556 g $\text{CO}_2\text{-eq/L}$. Furthermore, according to Continental (1999), the contribution of a tire to the fuel consumption of a car is 5.2%. In this study, it is assumed that the percentage is also applied to the bus. Combining the above values with $p(x)$ results in the GWP per km of the use phase of the tire and is presented by the following:

$$d_u(x) = 0.052 \times 2694.556 (0.653 + 4.461 \times 10^{-7}x) \\ = 91.496 + 6.250 \times 10^{-5}x \quad (15)$$

The average price of diesel fuel in Indonesia is US\$ 0.577 per liter. Using the same assumption as above, the operating cost of the tire per km is given by equation (16).

$$c_u(x) = 1.960 \times 10^{-2} + 8.743 \times 10^{-9}x \quad (16)$$

In equation (15), the intercept of $d_u(x)$ is the GWP of the tire during use phase, in g $\text{CO}_2\text{-eq/km}$, and the slope of $d_u(x)$ is the increase in GWP of the tire with use, in g $\text{CO}_2\text{-eq/km}^2$. For equation (16), the intercept of $c_u(x)$ is the operation cost of the tire, in US\$/km, and the slope of $c_u(x)$ is the increase in operation cost of the tire with use, in US\$/ km^2 .

It is important to note that the case study does not consider the following:

- a. The effect of road roughness and geometry on fuel consumption
- b. The effect of the decrease in the depth of the tire tread on fuel consumption
- c. The effect of a change in speed on fuel consumption

4.2. Time to failure

A total of 127 observations regarding time to failure of the tire is collected from the company. Note that the data is in terms of the distance traveled, in km, by the tire. The mean time to failure of the tire is 20,602 km and the standard deviation is 1883 km. The minimum value of the time to failure is 16,320 km, and the maximum value is 24,059 km. To fit the observations to a particular theoretical statistical distribution, a goodness of fit test is performed. The method used for the goodness of fit test in this case study is the Anderson – Darling test. The observations (time to failure) collected in this study are fitted to the Weibull distribution using a confidence level of 0.05. The reason to choose the Weibull distribution is that, according to Feldman and Valdez-Flores (2010), the Weibull random variables properly describe the failure time.

The test results, summarized in Table 1, present that the Weibull distribution properly models the data. As it can be seen from the coefficient correlation, 98.5%. Therefore, we conclude that the probability density function, cumulative probability function, survival function, failure rate function, and the expected length of the use phase of the tire are the following:

Probability density function,

$$f(x) = 6.238 \times 10^{-4} \left(\frac{x}{21416.3} \right)^{12.3585} \exp \left[- \left(\frac{x}{21416.3} \right)^{13.3585} \right] \quad (17)$$

Cumulative probability function,

$$F(x) = 1 - \exp \left[- \left(\frac{x}{21416.3} \right)^{13.3585} \right] \quad (18)$$

Survival function,

$$R(x) = \exp \left[- \left(\frac{x}{21416.3} \right)^{13.3585} \right] \quad (19)$$

Failure rate function,

$$h(x) = 6.238 \times 10^{-4} \left(\frac{x}{21416.3} \right)^{12.3585} \quad (20)$$

Expected length of the use phase,

$$L(x) = xR(x) + \int_0^x f(s)ds \quad (21)$$

4.3. Preventive replacement schedule

4.3.1. Cost minimization

The objective function of the cost minimization problem for the tire is to minimize the expected preventive replacement cost,

Table 1
Goodness of fit test results for Weibull distribution.

Parameters	Estimate	Standard error	95% normal confidence interval	
			Lower	Upper
Shape (α)	13.3585	0.8470	11.797	15.126
Scale (β)	21,416.3	150.944	21,122.5	21,714.2
Anderson-Darling (adjusted)	1.282			
Correlation coefficient	0.985			

expected failure replacement cost and the operation cost per km of the tire. Mathematically, it is given by the following:

$$\begin{aligned} \text{Minimize } Z_c(x_c) &= \frac{\left(\begin{array}{l} \text{Expected preventive replacement cost of the tire} \\ + \text{expected failure replacement cost of the tire} \\ + \text{expected operation cost of the tire} \end{array} \right)}{\text{Expected length of tire's use phase}} \\ &= \frac{31.01 + 30.77F(x_c) + \int_0^{L(x_c)} c_u(x) dx}{L(x_c)}, \text{ subject to } x_c \geq 0. \end{aligned}$$

For the bus tire, $c_u(x)$ is given by equation (16), $F(x_c)$ is given by equation (18), and $L(x_c)$ is given by equation (21). In order to find the best solution x_c^* , substitute the values of $c_f = \text{US\$ } 31.01$, $c_r = \text{US\$ } 30.77$ and the slope of equation (16) $a_c = 8.743 \times 10^{-9} \text{ US\$/km}^2$, into equation (4). It results the following equation:

$$1.008 = 0.0325L(x_c) \left(30.77h(x_c) + 4.3715 \times 10^{-9}L(x_c) \right) - F(x_c) \quad (22)$$

$h(x_c)$ for the bus tire is given by equation (20).

Equation (22) cannot be solved analytically, therefore evaluate it numerically. A computer program written in Matlab® is used to perform numerical analysis. The results of the numerical analysis are presented in Table 2.

Based on the results of the numerical analysis, it is clear that the optimal value of x_c is between 16,000 km (lower bound) and 18,000 km (upper bound). Therefore, the new cost minimization problem for the tire is given by equation (23).

$$\begin{aligned} \text{Minimize } Z_c(x_c) &= \frac{31.01 + 30.77F(x_c) + 1.960L(x_c) + 4.3715L^2(x_c)}{L(x_c)} \\ \text{Subject to } x_c &\geq 16,000, -x_c \geq -18,000 \end{aligned} \quad (23)$$

The plot of the objective function of equation (23) is presented in Fig. 3.

The optimization problem, equation (23), is then solved using GA. It is found that $x_c^* = 17,700.506$ km and $Z_c^* = \text{US\$ } 0.0216$ per km. In order to guarantee that $(x_c^*, Z_c^*) = (17,700.506, 0.0216)$ is an optimal solution, we substitute the solution back into the KKT conditions. For the cost minimization problem, the KKT conditions are reduced into equation (4). After substituting all economic and failure rate parameters of the tire into equation (4), the KKT conditions for the cost minimization problem of the tire is presented by equation (22). When $x_c^* = 17,700.506$, it is found that $L(x_c^*) = 17,562.522$, $h(x_c^*) = 5.919 \times 10^{-5}$ and $F(x_c^*) = 0.0754$. When those values are substituted back into equation (22), the right-hand

Table 2
Results of the numerical analysis of equation (22).

x_c^* (km)	c_f/c_r	$0.0325L(x_c)(30.77h(x_c) + 4.3715 \times 10^{-9}L(x_c)) - F(x_c)$
100	1.008	9.784×10^{-31}
5000		4.492×10^{-8}
10,000		4.718×10^{-4}
12,000		5.388×10^{-3}
14,000		0.042
16,000		0.251
18,000		1.208
20,000		4.881

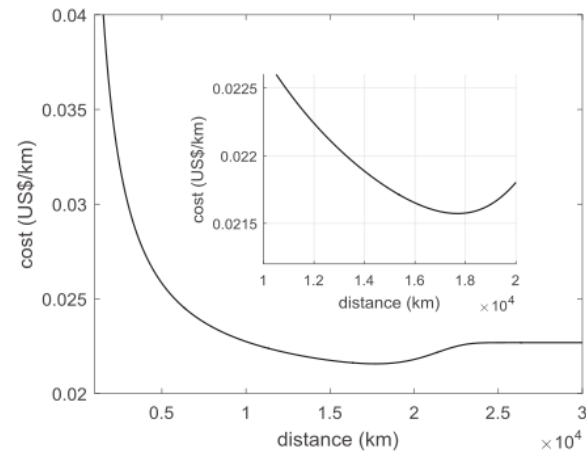


Fig. 3. Plot of cost minimization problem objective function.

side equals to 1.008. This test indicates that $(x_c^*, Z_c^*) = (17,700.506, 0.0216)$ is an optimal solution.

This implies that if the company wants to minimize cost per km of the tire, then it is suggested to perform the preventive replacement action when the tire reaches 17,700.51 km, and the total expected cost per km of this schedule is US\$0.0216. Note that GA is a heuristic searching method, which each run of the GA may produce a different solution. The value of $x_c^* = 17,700.51$ km is the average value of the optimal solutions produced by GA after 100 runs. The range of the solutions (in km) is [17,696.58, 17,735.80] and the standard deviation equals to 12.40 km.

If a failure replacement policy is implemented, then the total expected cost per km is US\$0.0227/km (note that this amount is calculated based on the actual failure distances of the 127 tires observed in this study). This means that the implementation of a preventive replacement policy results in a total savings of 5% in the total expected cost per km. If calculated over the expected length of the use phase of the tire, the preventive replacement policy results in about US\$23 savings per tire. This value is only US\$8 less than the price of a replacement tire.

4.3.2. GWP minimization

The objective function of the GWP minimization problem is to minimize the expected GWP of the preventive replacement of the tire, expected GWP of the failure replacement of the tire, and expected GWP of using the tire per kilometer. This problem is given by the following:

$$\begin{aligned} \text{Minimize } Z_d(x_d) &= \frac{\left(\begin{array}{l} \text{Expected GWP of the preventive replacement of the tire} \\ + \text{expected GWP of the failure replacement of the tire} \\ + \text{Expected GWP of the use phase of the tire} \end{array} \right)}{\text{Expected length of tire's use phase}} \\ &= \frac{11,450 + \int_0^{L(x_d)} d_u(x) dx}{L(x_d)}, \text{ subject to } x_d \geq 0. \end{aligned}$$

$L(x_d)$, and $d_u(x)$ are given by equations (1) and (15), respectively. To find the optimal solution x_d^* , substitute $d_r = 11,450 \text{ g CO}_2\text{-eq}$ and the slope of equation (15) $a_d = 6.250 \times 10^{-5} \text{ g CO}_2\text{-eq/km}^2$ into equation (7) and the result is given by equation (24).

Table 3
Results of the numerical analysis of equation (24).

x_d^* (km)	d_t	$(x_d R(x_d) + \int_0^{x_d} x f(x) dx)^2$
100	3.664×10^8	1.000×10^4
5000		2.500×10^7
15,000		2.247×10^8
16,000		2.553×10^8
17,000		2.872×10^8
18,000		3.197×10^8
19,000		3.514×10^8
20,000		3.800×10^8

$$3.664 \times 10^8 = \left(x_d R(x_d) + \int_0^{x_d} x f(x) dx \right)^2 \quad (24)$$

$R(x)$ and $f(x)$ are given by equations (19) and (17). Similar to equation (22), equation (24) cannot be solved analytically. Therefore, it is evaluated numerically using a computer program written in Matlab®. The results of the numerical analysis are presented in Table 3.

Table 3 suggests that x_d^* is between 18,000 and 20,000 km. Based on this, the new GWP minimization problem is formulated and given by equation (25).

$$\begin{aligned} \text{Minimize } Z_d(x_d) &= \frac{11,420 + 91.549L(x_d) + 3.125 \times 10^{-6}L^2(x_d)}{L(x_d)} \\ \text{Subject to } x_d &\geq 9,000, -x_d \geq -20,000 \end{aligned} \quad (25)$$

The plot of the objective function of equation (25) is presented in Fig. 4.

The GWP minimization problem, equation (25), is solved using GA and it is found that $x_d^* = 19,503.762$ km and $Z_d^* = 92.745$ g CO₂-eq

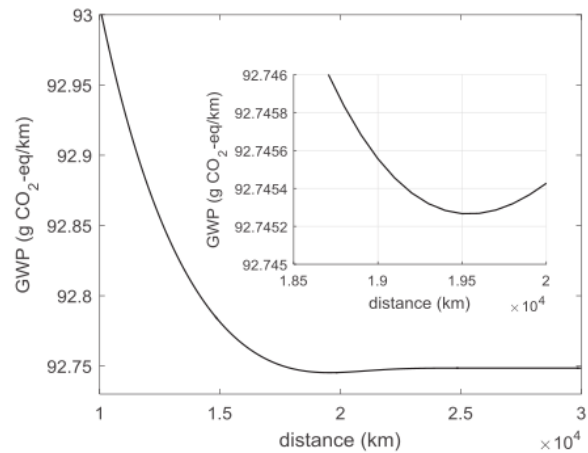


Fig. 4. Plot of GWP minimization problem objective function.

19,054.76] and the standard deviation equals to 0.472 km. If a failure replacement policy is implemented, it will produce a total GWP of 92.748 g CO₂-eq per km. This means that the implementation of the preventive replacement results in about 0.2 kg CO₂-eq savings on the GWP over the expected length of the use phase of the tire.

4.3.3. Multi-objective (cost and GWP) minimization

Based on the above results, it is concluded that the best distance to replace the tire, such that the economic consequence and GWP are minimized, is between 17,700.506 km and 19,503.762 km. Therefore, the multi-objective minimization problem is given by the following:

$$\begin{aligned} \text{Minimize } \begin{cases} Z_c(x_{cd}) = \frac{31.01 + 30.77F(x_{cd}) + 1.960L(x_{cd}) + 4.3715L^2(x_{cd})}{L(x_c)} \\ Z_d(x_{cd}) = \frac{11,420 + 91.549L(x_{cd}) + 3.125 \times 10^{-6}L^2(x_{cd})}{L(x_{cd})} \end{cases} \\ \text{Subject to } 17,700.506 \leq x_{cd} \leq 19503.762 \end{aligned} \quad (26)$$

per km. For the GWP minimization problem of the tire, the KKT condition is given by equation (7). After substituting all GWP and failure rate parameters of the tire into equation (7), equation (24) is obtained. When $x_d^* = 19,503.762$ it is found that $R(x_d^*) = 0.751$ and $\int_0^{19503.762} x f(x) dx = 4498.119$. When those values are substituted back into equation (24), the right-hand side equals to 3.664×10^8 . This guarantees that $(x_d^*, Z_d^*) = (19,503.762, 92.745)$ is an optimal solution.

This means that if the company wants to minimize the GWP of the tire, then it is suggested to perform the preventive replacement when the tire reaches 19,503.762 km. This schedule produces 92.745 g CO₂-eq per km. Similar to the solution to the cost minimization problem, the value of $x_d^* = 19,503.76$ km is the average value of the optimal solutions produced by GA after 100 runs. It is also found that the range of the solutions (in km) is [19,052.80,

The multi-objective GA is applied to solve the above problem. Since this is a multi-objective optimization problem, there is no a unique solution that simultaneously optimizes the two objective functions. The solutions of the problem are given in the form of a Pareto optimal front, Fig. 5(a). The Pareto optimal front gives a set of optimal solutions. In this case, the solutions provided by the Pareto optimal front are equally good. Fig. 5(b) presents all the solutions with their objective function values. From Fig. 5(b) it can be seen that there is a conflicting situation between the objective functions. The directions to minimize the two objective functions are contradictory.

From Fig. 5(b), it can also be seen that the optimal solutions are between 17,700 km and 19,500 km. This range is within the range of the time to failure of the tire that is between 16,300 km and 24,000 km. In order to have a unique solution, decision maker's preference plays an important role. As a consideration for policy

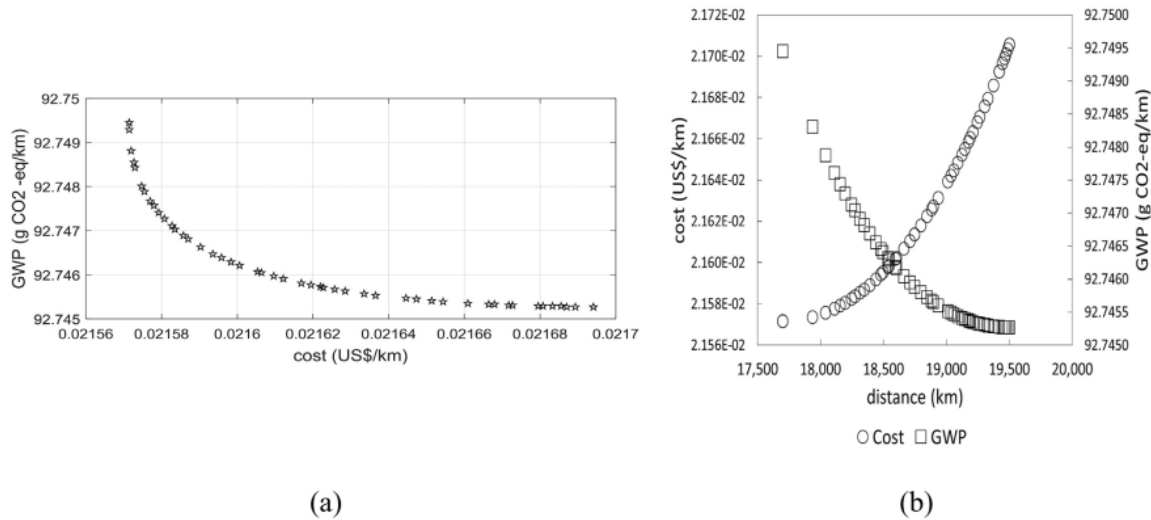


Fig. 5. Optimal solutions, (a) Pareto optimal front, (b) optimal distances and their objective function values.

makers, if they want to have a single schedule, a 1000 km increase in the optimal schedule minimizing expected total cost results in a 0.4% increase in the expected total cost and a 0.002% decrease in the expected total GWP. This indicates that cost is relatively more important than GWP. Furthermore, it is important to note that if a different environmental impact category is chosen, such as ecotoxicity or ozone layer depletion, the model may produce a different set of optimal solutions. Moreover, as it is mentioned in Afrinaldi et al. (2016), using a single environmental impact category may not be enough for the decision makers to make a decision or to formulate a policy.

4.4. Sensitivity analysis

4.4.1. Shape parameter of the failure rate function is less than 1

There is a very critical point that must be noted. According to Jardine and Tsang (2013), a preventive replacement policy must only be applied to a component which has an increasing failure rate. The same argument applies to the model presented in this case study. The reason is that, if the tire has a constant failure rate, a preventive replacement action will not have an effect on the probability of tire to fail in the future. If the tire has a decreasing failure rate, taking a preventive replacement action will reset the tire failure rate to its original value, which is higher than the current failure rate. From the economic and environmental considerations, applying the model to a tire (or any other component) having a constant or decreasing failure rate means wasting the money and increasing the environmental impact. The easiest way to spot the above phenomena is from the value of α , the shape parameter of the failure probability density function. If $\alpha \leq 1$ then the failure rate is constant or decreasing.

4.4.2. Operation cost is a constant

The operation cost of the tire is denoted as $c_u(x)$. Now, let's assume that the new form of $c_u(x)$ is $c_u(x) = 1.960 \times 10^{-2}$ US\$/km, a constant. This change modifies equation (22) into the following:

$$1.008 = L(x_c)h(x_c) - F(x_c) \quad (27)$$

A comparison of the effects of the new and original forms of $c_u(x)$ on x_c^* is presented in Fig. 6. The original form of $c_u(x)$ is given

by equation (16), an increasing function. In Fig. 6, $x_{c,New}^*$ and $x_{c,Original}^*$ are given by the x-coordinate of the intersection points. The figure shows that $x_{c,New}^* > x_{c,Original}^*$. The reason is that, during the use phase, the new scenario incurs less cost than the original scenario. Therefore, it is reasonable to use the tire for a longer distance.

4.4.3. Environmental impact of the use phase is a constant

The environmental impact of the use phase of the tire is denoted as $d_u(x)$. If $d_u(x)$ is a constant, from the environmental impact standpoint only, it is not wise to adopt a preventive replacement policy. Let's assume that $d_u(x) = q$. Then the expected environmental impact of using the tire per km is $\int_0^{L(x_d)} q dx / L(x_d) = q$. The consequence of this is that $Z_d(x_d)$ will always decrease as x_d increases, which means that it is better to wait for the tire to fail and then take a replacement action (a failure replacement policy). Furthermore, since the source of the environmental impact is the

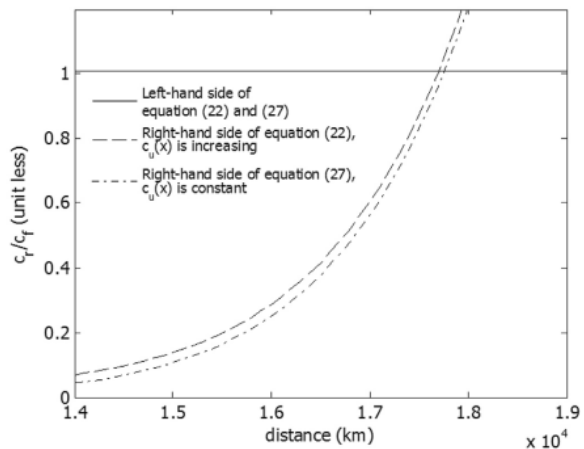


Fig. 6. The effect of $c_u(x)$ on x_c^* .

consumption of the diesel fuel, this implies that, when $d_u(x)$ is a constant, $c_u(x)$ will also be a constant. As a consequence, fuel cost will not be an important factor anymore. The expected fuel cost per km will always decrease as x_c increases.

4.4.4. Change in the values of cost parameters

The model has four cost parameters, c_r (preventive replacement cost, in US\$), c_f (failure replacement cost, in US\$), b_c (operation cost, in US\$/km), and a_c (increase in operation cost with use, in US\$/km²). From Fig. 7(a) it can be seen that the increase in the value of c_r/c_f increases the optimal preventive replacement distance for the cost minimization problem, x_c^* . c_r/c_f increases when c_r increases or c_f decreases. A higher value of c_r means a more expensive preventive replacement cost. Therefore, it is reasonable to increase x_c^* in order to have a lower total cost per km. A lower value of c_f implies a cheaper failure replacement cost then it is better to have a higher value of x_c^* . If the tire fails before x_c^* , it will not be a problem because c_f is small.

Fig. 7(b), (c), (d), and (e) present the effect of a change in the values of c_r , c_f , a_c , and b_c on the optimal value of the objective function of cost minimization problem, Z_c^* . The figures prove that if the values of the parameters increase then Z_c^* also increases. The change in the values of c_r , a_c , and b_c have a linear relationship with the change in the value of Z_c^* but the relationship between the change in the value of c_f and the change in the value of Z_c^* is non-linear. According to the figures, 1% reduction in the values of c_r , c_f , a_c , and b_c contributes to 0.09%, 0.01%, 0.004% (on average), and 0.91% reduction in the value of Z_c^* , respectively. This finding gives an important insight. The analysis suggests that, in order to further reduce the total cost, more focus must be put on the reduction in the value of b_c , operation cost of the tire, because it gives the

greatest advantage. It is influenced by the fuel economy of the bus and tire rolling resistance. Therefore, an improvement in the fuel economy of the bus and tire performance in terms of rolling resistance must be put as the top priorities.

4.4.5. Change in the values of environmental impact parameters

There are three environmental impact parameters of the model, d_r (replacement action GWP, in g CO₂-eq), b_d (use phase GWP, in g CO₂-eq/km), and a_d (increase in GWP with use, in g CO₂-eq/km²). Fig. 8(a) shows that an increase in the value of d_r/a_d produces a longer optimal preventive replacement distance for the environmental impact minimization problem, x_d^* . The increase in the value of d_r/a_d happens if d_r increases or a_d decreases. The increase in the value of d_r implies that a higher GWP effect is produced during the retreading process of the tire. Therefore, in order to minimize GWP per km, it is reasonable to increase the optimal preventive replacement distance. A lower value of a_d means a lower increase in the amount of GWP during the use phase. As a consequence, a longer value of x_d^* is resulted.

Moreover, if the value of $2d_r/a_d$ is equal to or higher than the asymptotic line of Fig. 8(a), then the problem has an unbounded optimal solution. This means that it is better to wait until the tire fails and then perform a replacement action. In other words, a preventive replacement policy is not profitable in this situation. A failure replacement policy is a better option. This situation may occur when d_r is too high, or a_d is too low.

From Fig. 8(b), (c), and (d), it can also be seen that the increase in the values of d_r , a_d , and b_d increases the optimal value of the objective function of the environmental impact minimization problem, Z_d^* . The change in the values of a_d and b_d exhibits a linear relationship with the change in the value of Z_d^* but the change in

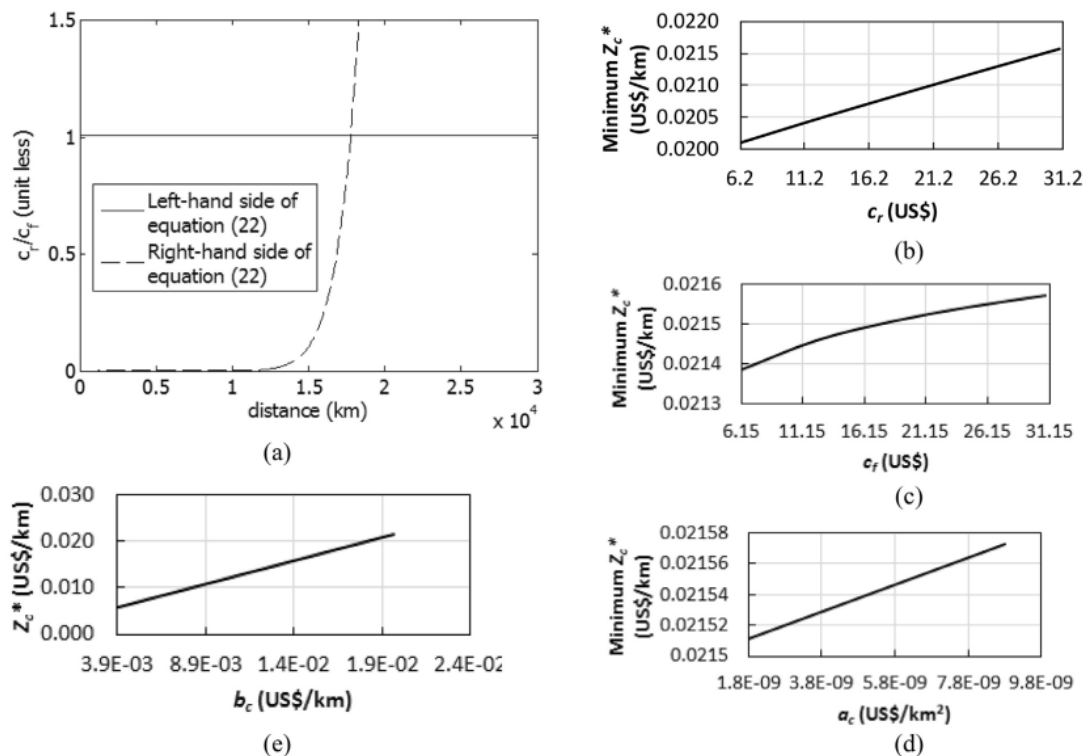


Fig. 7. Effect of change in the value of cost parameters, (a) plot of equation (22), (b) change in c_r , (c) change in c_f , (d) change in a_c , (e) change in b_c .

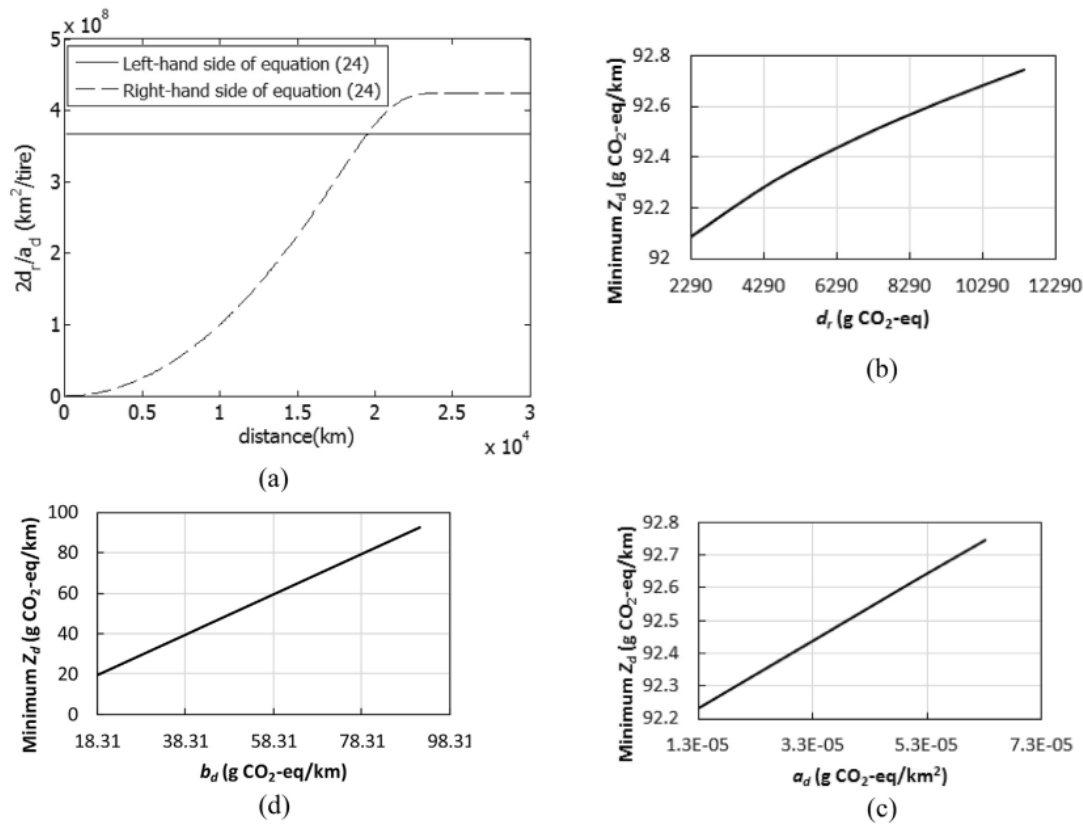


Fig. 8. Effect of change in the value of environmental impact parameters, (a) plot of equation (24), (b) change in d_r , (c) change in a_d , (d) change in b_d .

the value of d_r has a non-linear relationship with Z_d^* . It is found that 1% reduction in the values of d_r , a_d , and b_d contributes to 0.01% (on average), 0.01%, and 0.99% reduction in the value of Z_d^* , respectively. Therefore, reduction in the value of b_d must be put as the highest priority. The parameter b_d , expressed in g CO₂-eq/km, is the use phase GWP of the tire. Similar to b_c , the value of b_d is influenced by the fuel economy of the bus and tire's rolling resistance. Those two factors must be put as the top priorities since they give the highest advantage in reducing total environmental impact.

5. Conclusions

This research answers a question of when a component should be replaced such that the economic and environmental impacts per unit time of the component are minimized. A mathematical model is developed in order to answer the question. The developed model is an extension of currently available replacement models in the literature in which most of them only consider cost in their objective functions.

The determination of the optimum replacement timing of a component is a complex problem because it depends on the distribution of the time to failure of the component and usually involves a nonlinear optimization problem. In the literature, different nonlinear programming algorithms are developed to solve particular types of nonlinear programming problem. In this paper, GA is utilized and in order to guarantee that the solution found by GA is optimum, the solution is checked using KKT conditions for optimality. GA is preferred because it is easy to implement, efficient,

and robust. If compared to other metaheuristic methods, GA has a more diverse solution population. It makes GA faster in finding the optimum point and avoids GA to stop in local optimum. If compared to GRG and SQP algorithms, GA is preferred because GRG and SQP are sensitive to the initial solution provided and they may trap in local optimum depending to the value of the initial solution used.

This study shows that the proposed preventive placement model is only applicable to a component which has an increasing failure rate function. If the failure rate of the component is constant or decreasing, a failure replacement policy is a better option. Furthermore, the sensitivity analysis shows that the model is very sensitive to the value of the economic and environmental parameters of the model. A higher replacement cost and severe environmental impact caused by the replacement action lead the model to produce a longer interval between preventive replacement actions. Similarly, a lower value of operation cost and a decrease in the value of environmental impact during the use phase also make the model to produce a longer interval between preventive replacements. The sensitivity analysis also suggests that, in order to get a greater reduction in the value of total cost per km and environmental impact per km, focus must be put on improving the fuel efficiency, operation cost, and environmental impact during the component use phase. Furthermore, the severe environmental act produced by the replacement action and a considerably low environmental impact emitted during the use phase may cause the model to have an unbounded optimal solution. This means it is better to wait for the component to fail and then take a replacement action (a failure replacement policy).

Since the proposed model is a multi-objective optimization model, then it produces a set of optimal solutions. In order to have a single solution, policy makers' preferences need to be taken into consideration. To incorporate their preferences, a simple weighting method and an eco-efficiency analysis can be implemented to produce a single solution. The case study conducted in this research selects GWP as the environmental indicator. Choosing another environmental impact category may result in a different set of optimal solutions. This indicates the main drawback of the model.

Notation list

a_c	increase in operation cost with use
a_d	increase in the amount of environmental impact with use
b_c	operation cost
b_d	environmental impact of the use phase
c_f	failure cost
c_r	replacement cost
d_r	environmental impact of the replacement activity
x	a random variable denoting time to failure
x_c	a random variable denoting preventive replacement schedule for cost minimization problem
x_c^{lb}	lower bound of x_c
x_c^{ub}	upper bound of x_c
x_d	a random variable denoting preventive replacement schedule for environmental impact minimization problem
x_{cd}	schedule of preventive replacement such that cost and environmental impact are minimized
x_d^{lb}	lower bound of x_d
x_d^{ub}	upper bound of x_d
$c_u(x)$	operation cost per unit time at time x
$d_u(x)$	environmental impact per unit time at time x
$f(x)$	failure probability density function
$F(x)$	cumulative distribution function of failure
$h(x)$	failure rate function
$R(x_c)$	survival distribution function
$L(x_c)$	expected length of the use phase
$\lambda_{1c}, \lambda_{2c}$	Lagrangean multipliers for the cost minimization problem
$\lambda_{1d}, \lambda_{2d}$	Lagrangean multipliers for the environmental impact minimization problem

$M(x_c)$	expected length of time to failure
Y_c	Lagrangean function for the cost minimization problem
Y_d	Lagrangean function for the cost minimization problem
$Z_c(x_c)$	total expected cost per unit time
$Z_d(x_d)$	total expected environmental impact per unit time

References

- Afrinaldi, F., Zhang, H.C., Liu, Z.C., Hernandez, A., 2016. Loss and benefit caused by a diesel engine: from the perspective of human health. *J. Ind. Ecol.* <http://dx.doi.org/10.1111/jiec.12415>.
- Ajukumar, V.N., Gandhi, O.P., 2013. Evaluation of green maintenance initiatives in design and development of mechanical systems using an integrated approach. *J. Clean. Prod.* 51 (2013), 34–46.
- Chang, D., Lee, C.K.M., Chen, C.-H., 2014. Review of life cycle assessment towards sustainable product development. *J. Clean. Prod.* 83 (2014), 48–60.
- Continental, A.G., 1999. Life Cycle Assessment of a Car Tire. Continental AG, Hannover, Germany.
- Elghali, L., Cowell, S.J., Begg, K.G., Clift, R., 2006. Support for sustainable development policy decisions: a case study from highway maintenance. *Int. J. Life Cycle Assess.* 11 (1), 29–39.
- Feldman, R.M., Valdez-Flores, C., 2010. Applied Probability and Stochastic Processes. Springer, Heidelberg.
- Frontline Systems, 2016. Backgrounder - Genetic and Evolutionary Algorithms versus Classical Optimization. Retrieved from: <http://www.solver.com/press/backgrounder-genetic-and-evolutionary-algorithms-versus-classical-optimization>, on October 25, 2016.
- Giustozzi, F., Crispino, M., Flintsch, G., 2012. Multi-attribute life cycle assessment of preventive maintenance treatments on road pavements for achieving environmental sustainability. *Int. J. Life Cycle Assess.* 17 (4), 409–419.
- Hallstedt, S.I., Bertoni, M., Isaksson, O., 2015. Assessing sustainability and value of manufacturing processes: a case in the aerospace industry. *J. Clean. Prod.* 108 (Part A), 169–182, 2015.
- Jardine, A.K.S., Tsang, A.H.C., 2013. Maintenance, Replacement, and Reliability: Theory and Applications. CRC Press, Boca Raton, FL.
- Liu, Z., Afrinaldi, F., Zhang, H.-C., Jiang, Q., 2016. Exploring optimal timing for remanufacturing based on replacement theory. *CIRP Ann. Manuf. Technol.* 65 (1), 447–450.
- Minne, E., Crittenden, J.C., 2015. Impact of maintenance on life cycle impact and cost assessment for residential flooring options. *Int. J. Life Cycle Assess.* 20 (1), 36–45.
- Noland, R.B., Hanson, C.S., 2015. Life-cycle greenhouse gas emissions associated with a highway reconstruction: a New Jersey case study. *J. Clean. Prod.* 107 (2015), 731–740.
- Sikos, L., Klemeš, J., 2009. RAMS contribution to efficient waste minimization and management. *J. Clean. Prod.* 17 (10), 932–939.
- US EPA, 2014. Greenhouse Gas Emissions from a Typical Passenger Vehicle. Retrieved from: <https://www.epa.gov/sites/production/files/2016-02/documents/420f14040a.pdf>, on June 15 2014.
- Yeniay, O., 2005. A comparative study on optimization methods for the constrained nonlinear programming problems. *Math. Probl. Eng.* 2 (2005), 165–173.

JCLP - Minimizing

ORIGINALITY REPORT

9%

SIMILARITY INDEX

5%

INTERNET SOURCES

7%

PUBLICATIONS

0%

STUDENT PAPERS

PRIMARY SOURCES

1

epubs.surrey.ac.uk

Internet Source

<1%

2

archive.org

Internet Source

<1%

3

Encyclopedia of Operations Research and Management Science, 2013.

Publication

<1%

4

Garbatov, Y.. "Structural maintenance planning based on historical data of corroded deck plates of tankers", Reliability Engineering and System Safety, 200911

Publication

<1%

5

Chiara Franciosi, Alexandre Voisin, Salvatore Miranda, Stefano Riemma, Benoit lung. "Measuring maintenance impacts on sustainability of manufacturing industries: from a systematic literature review to a framework proposal", Journal of Cleaner Production, 2020

Publication

<1%

6

Internet Source

<1 %

7

A.N. Das. "Age Replacement of Components During IFR Delay Time", IEEE Transactions on Reliability, 9/2004

Publication

<1 %

8

www.turi.org

Internet Source

<1 %

9

Zhichao Liu, Feri Afrinaldi, Hong-Chao Zhang, Qihong Jiang. "Exploring optimal timing for remanufacturing based on replacement theory", CIRP Annals, 2016

Publication

<1 %

10

researchoutput.csu.edu.au

Internet Source

<1 %

11

www.ueda.info.waseda.ac.jp

Internet Source

<1 %

12

escholarship.org

Internet Source

<1 %

13

Elsayed A. Elsayed. "MAINTENANCE AND INSPECTION", Wiley, 2020

Publication

<1 %

14

Hamid Reza Golmakani. "Optimal age-based inspection scheme for condition-based maintenance using A* search algorithm",

<1 %

15

industri.ft.unand.ac.id

Internet Source

<1 %

16

Campbell, . "References, Facts, Figures, and Formulas", Dekker Mechanical Engineering, 2010.

Publication

<1 %

17

publik.tuwien.ac.at

Internet Source

<1 %

18

worldwidescience.org

Internet Source

<1 %

19

Pushpen Biswas, Purnendu Bose, Vinod Tare. "Optimal choice of wastewater treatment train by multi-objective optimization", Engineering Optimization, 2007

Publication

<1 %

20

ethesis.inp-toulouse.fr

Internet Source

<1 %

21

Shivaie, Mojtaba, Mohammad S. Sepasian, and Mohammad K. Sheikh-El-Eslami. "Multi-objective transmission expansion planning based on reliability and market considering phase shifter transformers by fuzzy-genetic algorithm : MULTI-OBJECTIVE

<1 %

TRANSMISSION EXPANSION PLANNING", International Transactions on Electrical Energy Systems, 2013.

Publication

22

textclothsustain.springeropen.com

Internet Source

<1 %

23

shodhganga.inflibnet.ac.in

Internet Source

<1 %

24

Manzini. "Basic Models and Methods for
Maintenance of Production Systems", Springer
Series in Reliability Engineering, 2010

Publication

<1 %

25

www.fedoa.unina.it

Internet Source

<1 %

26

Rives, J.. "LCA comparison of container
systems in municipal solid waste management",
Waste Management, 201006

Publication

<1 %

27

www.ijaseit.insightsociety.org

Internet Source

<1 %

28

Zhigang Tian. "Maintenance Optimization of
Wind Turbine Systems Based on Intelligent
Prediction Tools", Studies in Computational
Intelligence, 2011

Publication

<1 %

arc.aiaa.org

30

Mohamed Atef Mosa. "chapter 4 Data Text Mining Based on Swarm Intelligence Techniques", IGI Global, 2020

Publication

<1 %

31

Małgorzata Jasiulewicz - Kaczmarek, Arkadiusz Gola. "Maintenance 4.0 Technologies for Sustainable Manufacturing - an Overview", IFAC-PapersOnLine, 2019

Publication

<1 %

32

en.wikipedia.org

Internet Source

<1 %

33

Teshome L. Yami, Junyi Du, Laura R. Brunson, Jim F. Chamberlain, David A. Sabatini, Elizabeth C. Butler. "Life cycle assessment of adsorbents for fluoride removal from drinking water in East Africa", The International Journal of Life Cycle Assessment, 2015

Publication

<1 %

34

dokumen.pub

Internet Source

<1 %

35

Penn, M.. "A polynomial time algorithm for solving a quality control station configuration problem", Discrete Applied Mathematics, 20080215

<1 %

-
- 36 Nugraha, H, and N Sinisuka. "The application of RAMS to analysis life cycle cost on the operation of power generation", Safety Reliability and Risk Analysis Beyond the Horizon, 2013.

Publication

-
- 37 research.chalmers.se <1 %

Internet Source

-
- 38 lib.dr.iastate.edu <1 %

Internet Source

-
- 39 permanent.fdlp.gov <1 %

Internet Source

-
- 40 citeseerx.ist.psu.edu <1 %

Internet Source

-
- 41 Damien Trigaux, Lien Wijnants, Frank De Troyer, Karen Allacker. "Life cycle assessment and life cycle costing of road infrastructure in residential neighbourhoods", The International Journal of Life Cycle Assessment, 2016

Publication

-
- 42 Kuo, Tsai-Chi, Shana Smith, Gregory C. Smith, and Samuel H. Huang. "A predictive product attribute driven eco-design process using depth-first search", Journal of Cleaner Production, 2016. <1 %

43 "Sustainable Design and Manufacturing 2017", Springer Science and Business Media LLC, 2017

Publication

<1 %

44 www.scielo.br

Internet Source

<1 %

45 utpedia.utp.edu.my

Internet Source

<1 %

46 G.S. Mani. "Conditions for balanced polymorphism in the presence of differential delay in developmental time", Theoretical Population Biology, 1981

Publication

<1 %

47 Gregory Taylor. "Chapter 1 An Analysis of Underwriting Cycles and Their Effects on Insurance Solvency", Springer Science and Business Media LLC, 1991

Publication

<1 %

48 Changhwan Choi, Daeok Lee, Kyihwan Park. "Fuzzy design of a switched reluctance motor based on the torque profile optimization", IEEE Transactions on Magnetics, 2000

Publication

<1 %

49 Vlasopoulos, N.. "Life cycle assessment of wastewater treatment technologies treating

<1 %

petroleum process waters", Science of the Total Environment, The, 20060815

Publication

50

Dong-Joo Moon. "Extensions and Limitations of the Perception Approach", Advances in Spatial Science, 2011

Publication

<1 %

51

Qingan Qiu, Lirong Cui, Jingyuan Shen, Li Yang. "Optimal maintenance policy considering maintenance errors for systems operating under performance-based contracts", Computers & Industrial Engineering, 2017

Publication

<1 %

52

John H. CHAMBERLIN. "Direct Inclusion of Demand Functions in Linear Programming Forecasting Models", The Engineering Economist, 1979

Publication

<1 %

53

Muhammad Ilhamdi Rusydi, Minoru Sasaki, Muhammad Hadi Sucipto, Zaini, Noverika Windasari. "Local Euler Angle Pattern Recognition for Smash and Backhand in Badminton Based on Arm Position", Procedia Manufacturing, 2015

Publication

<1 %

54

Zackrisson, M.. "Environmental aspects when manufacturing products mainly out of metals

<1 %

and/or polymers", Journal of Cleaner Production, 200501

Publication

Exclude quotes On

Exclude matches Off

Exclude bibliography On

Date: Dec 08, 2016
To: "Feri Afrinaldi" f_afrinaldi@yahoo.com,feri.afrinaldi@ttu.edu,feri_afrinaldi@ft.unand.ac.id
From: Cecilia Almeida eesserver@eesmail.elsevier.com
Subject: Your Submission

Reply To: Cecilia Almeida cmvbag@unip.br

Ms. Ref. No.: JCLEPRO-D-16-01504R2

Title: Minimizing economic and environmental impacts through an optimal preventive replacement schedule: Model and application
Journal of Cleaner Production

Dear Feri,

It is my pleasure to inform you that your article "Minimizing economic and environmental impacts through an optimal preventive replacement schedule: Model and application" has been accepted for publication in Journal of Cleaner Production.

Your accepted manuscript will now be transferred to our production department and work will begin on creation of the proof. If we need any additional information to create the proof, we will let you know. If not, you will be contacted again in the next few days with a request to approve the proof and to complete a number of online forms that are required for publication.

Thank you for considering our publication.

With kind regards,

Dr. Cecilia Maria Villas Bôas de Almeida, PhD
Executive Editor
Journal of Cleaner Production

For further assistance, please visit our customer support site at <http://help.elsevier.com/app/answers/list/p/7923>. Here you can search for solutions on a range of topics, find answers to frequently asked questions and learn more about EES via interactive tutorials. You will also find our 24/7 support contact details should you need any further assistance from one of our customer support representatives.

Fw: Your Submission

From: Feri Afrinaldi (f_afrinaldi@yahoo.com)

To: taufikdtk@yahoo.com

Date: Saturday, June 25, 2016, 11:32 PM GMT+7

On Saturday, June 25, 2016 11:30 PM, Feri Afrinaldi <f_afrinaldi@yahoo.com> wrote:

On Saturday, June 25, 2016 7:15 PM, Cecilia Almeida
<ees.jclepro.86d0.3a3482.249e633a@eesmail.elsevier.com> wrote:

Ms. Ref. No.: JCLEPRO-D-16-01504

Title: Minimizing economic and environmental impacts through an optimal preventive replacement schedule: Model and application

Note: While submitting the revised manuscript, please double check the author names provided in the submission so that authorship related changes are made in the revision stage. If your manuscript is accepted, any authorship change will involve approval from co-authors and respective editor handling the submission and this may cause a significant delay in publishing your manuscript.

Dear Feri,

Please see the comments of the reviewers on the article you submitted to Journal of Cleaner Production. I suggest you consider these comments, suggestions and questions and revise your article accordingly. We would like to receive your revised submission within the next 60 days.

You will see that they are advising that you revise your manuscript. If you are prepared to undertake the work required, I would be pleased to reconsider my decision.

For your guidance, reviewers' comments are appended below.

If you decide to revise the work, please submit a list of changes or a rebuttal against each point which is being raised when you submit the revised manuscript.

To submit a revision, please go to <http://ees.elsevier.com/jclepro/> and login as an Author.

Your username is: f_afrinaldi@yahoo.com

If you need to retrieve password details, please go to:

http://ees.elsevier.com/jclepro/automail_query.asp

On your Main Menu page is a folder entitled "Submissions Needing Revision". You will find your submission record there.

Please note that this journal offers a new, free service called AudioSlides: brief, webcast-style presentations that are shown next to published articles on ScienceDirect (see also

<http://www.elsevier.com/audioslides>). If your paper is accepted for publication, you will automatically receive an invitation to create an AudioSlides presentation.

Journal of Cleaner Production features the Interactive Plot Viewer, see: <http://www.elsevier.com/interactiveplots>. Interactive Plots provide easy access to the data behind plots. To include one with your article, please prepare a .csv file with your plot data and test it online at <http://authortools.elsevier.com/interactiveplots/verification> before submission as supplementary material.

The revised version of your submission is due by Aug 24, 2016.

Yours sincerely,

Dr. Cecilia Maria Villas Bôas de Almeida, PhD
Executive Editor
Journal of Cleaner Production

Reviewers' comments:

Reviewer #1: Reviewer Comments

The authors developed an interesting mathematical model to determine the optimal schedule of preventive replacement of a component by minimizing both the economic and environmental impacts, including costs related to operation, failure, and replacement of the component as well as the environmental impact associated with the use and replacement action. A novel approach is also proposed with a thorough explanation of the parameters involved and a case study with sensitivity analysis for model validation. The main drawback of the model is that is not completely generalizable since parameters have to be considered on case by case basis. However, it does provide optimal solutions for the case study. Therefore, this paper generally could make a real contribution to the literature if the following comments and those shown in the attached file are addressed before the manuscript can be accepted.

General Comments

1. Few typing mistakes were detected. Please perform a thorough spell-check.
2. Check the in-text reference format. For more than two authors use Author1 et al., YEAR. For more than one reference use (Author1 et al., YEAR1; Author1 et al., YEAR2). Please put the years in ascending order and use semicolons not "and". Otherwise, it is difficult to follow.

Highlights

Some numbers from the case study might be beneficial in terms of percentage in costs minimization and negative environmental impact reduction.

Title

The title accurately describes the purpose of the article.

Abstract

Same as the highlights. Some numbers from the case study might be beneficial in terms of percentage in costs minimization and negative environmental impact reduction.

Materials and Methods

1. In subsection 4.1, authors mentioned that a linear equation came from an interview held with the company staff. Is this an empirical equation? Please elaborate on the way you found this equation since is not clear.
2. In subsection 4.2 you use too many significant figures for km and is not consistent. Stick

to no decimals or explain why they are necessary and keep one format only.

Keywords

The keywords are appropriate for indexing. Modeling can also be added.

Figures and Tables

1. Figures and Tables are notoriously well prepared and the data provided accurately shows the novelty of this manuscript. However, it is recommended to reduce the number of figures. You may add some of them as supplementary material and combined others.
2. Figures 2 and 3 are complementary. Therefore, you may put them as Figures 2a and 2b, respectively.
3. Figure 5 is not necessary; Table 1 is sufficient.
4. Figures 6 and 7 are complementary, put them as Figures 5a and 5b, respectively, in the new version.
5. Figures 8 and 9 are complementary, put them as Figures 6a and 6b, respectively, in the new version.
6. Figures 10 to 13 now become Figures 7 to 10.

Conclusions

Delete "and Future Work" from the heading

A notation list is necessary please add this section

Specific comments and editorial changes are shown in the attached document...

Reviewer #2: It was expected that , considering only the time life of tire, the preventive exchange wouldn't important from an environmental point of view, then the fuel cost needs to be more discussed in the text.

Suggestions :

- On page 8 , line 47, to explain how the equation was obtained through interviews.
- On page 11 , lines 16 to 21, says that the value 17,700.51 are a determinant value. This value is very precise and it was obtained through data that is, naturally, imprecise. Couldn't You include the estimated deviation, or interval, to this value? In this way the graphical determination is sufficient and it isn't necessary use GA. I understand that GA will be used after to multi objective problem.
- On page 13 , the lines 39 to 42 means that the fuel cost it doesn't important to cost minimization. It will be important include this on the paragraph.
- On the conclusion, the suggestion to use fuzzy increase the complexity of the problem and, from my point of view, the problem was very good approach in this paper and don't is necessary the fuzzy approach mixed with statistical and GA maths.

Reviewer #3: I think the field of the research is interesting. Unfortunately, the article is weak in technical aspects. I suggest to deeply review the state-of-art.

Abstract:

1. The abstract can be improved. A good abstract should be a synthesis of critical points through the paper.

2. Which environmental aspects did you minimize?
3. Which aspects did you consider in the sensitivity analysis?
4. You mention a procedure to find the best solution of the model: how does it work? which principles sustain this procedure?
5. You say: "This study shows that the developed model does not provide a unique optimal solution for the preventive replacement schedule of the tire but offers a set of optimal solutions". This is a general property of multi-objective problems. You have a trade-off and this is very common. Why to include this issue in the Abstract?

Introduction:

6. The literature review is not robust. You mention some pertinent papers and list their topics, but this is not a state-of-art. I suggest to carefully review these articles (and others) to clearly demonstrate the novelty of your work.

Technical comments:

7. The problem statement and objective is general. You should clearly inform about your objective functions. How did you quantify costs and environmental impact? If you review the literature you will find many indicators. Hundreds, to be more precise.
8. The use of Genetic algorithms (GA) is not properly justified. There are plenty other techniques. Why you cannot use formal optimization? You have continuous and differentiable functions, so proper techniques are related with gradient methods. Please, explain why do you have to use GA.
9. A graphical method? Why? In the 21st century you have formal mathematical and computational tools to find solutions, so you have to properly justify graphical methods. They are not necessary in the present. Because of the weakness of graphical methods, you should always prefer formal methods with a mathematical justification. Is an ethical issue in the 21st century.
10. The results of the article are presented as a list of numerical results, but not a proper research document. You should link your results to your questions and compose a connected text.
11. The results are weak. You have to clearly inform about the novelty of your results or techniques.

For further assistance, please visit our customer support site at

<http://help.elsevier.com/app/answers/list/p/7923>. Here you can search for solutions on a range of topics, find answers to frequently asked questions and learn more about EES via interactive tutorials. You will also find our 24/7 support contact details should you need any further assistance from one of our customer support representatives.

Note: Please write your text in good English (American or British usage is accepted, but not a mixture of these). Authors who require information about language editing and copyediting services pre- and post-submission please visit

<http://webshop.elsevier.com/languageservices> or our customer support site at <http://help.elsevier.com/app/answers/list/p/7923> for more information.



Your Submission

From: Cecilia Almeida (ees.jclepro.86d0.3c894b.b0c41cb3@eesmail.elsevier.com)

To: f_afrinaldi@yahoo.com; feri.afrinaldi@ttu.edu; feri_afrinaldi@ft.unand.ac.id

Date: Sunday, October 9, 2016, 09:32 PM GMT+7

Ms. Ref. No.: JCLEPRO-D-16-01504R1

Title: Minimizing economic and environmental impacts through an optimal preventive replacement schedule: Model and application

Note: While submitting the revised manuscript, please double check the author names provided in the submission so that authorship related changes are made in the revision stage. If your manuscript is accepted, any authorship change will involve approval from co-authors and respective editor handling the submission and this may cause a significant delay in publishing your manuscript.

Dear Feri,

Please see the comments of the reviewers on the article you submitted to Journal of Cleaner Production. I suggest you consider these comments, suggestions and questions and revise your article accordingly. We would like to receive your revised submission within the next 60 days.

You will see that they are advising that you revise your manuscript. If you are prepared to undertake the work required, I would be pleased to reconsider my decision.

For your guidance, reviewers' comments are appended below.

If you decide to revise the work, please submit a list of changes or a rebuttal against each point which is being raised when you submit the revised manuscript.

To submit a revision, please go to <http://ees.elsevier.com/jclepro/> and login as an Author.

Your username is: f_afrinaldi@yahoo.com

If you need to retrieve password details, please go to:
http://ees.elsevier.com/jclepro/automail_query.asp

On your Main Menu page is a folder entitled "Submissions Needing Revision". You will find your submission record there.

Please note that this journal offers a new, free service called AudioSlides: brief, webcast-style presentations that are shown next to published articles on ScienceDirect (see also <http://www.elsevier.com/audioslides>). If your paper is accepted for publication, you will automatically receive an invitation to create an AudioSlides presentation.

Journal of Cleaner Production features the Interactive Plot Viewer, see: <http://www.elsevier.com/interactiveplots>. Interactive Plots provide easy access to the data behind plots. To include one with your article, please prepare a .csv file with your plot data and test it online at <http://authortools.elsevier.com/interactiveplots/verification> before submission as supplementary material.

The revised version of your submission is due by Dec 08, 2016.

Yours sincerely,

Dr. Cecilia Maria Villas Bôas de Almeida, PhD
Executive Editor
Journal of Cleaner Production

Reviewers' comments:

Reviewer #1: The presented work has been improved and seems to be of good quality. The manuscript is well written now, and the compilation of work looks in good shape. The authors have convincingly addressed almost all of the reviewers' comments and the abstract and introduction sections improved considerably. Therefore, this paper could make an excellent contribution to the Journal of Cleaner Production.

Reviewer #2: With the refinements the paper are good for publish.

Reviewer #3: Thanks for your detailed answers.
Please find a list of comments and reviews here:

1. Abstract.

Your new abstract is OK. I suggest to use no decimal values in your numbers here, as in your Highlights.

2. Environmental aspects.

OK, your model is general. Anyway, I suggest to inform properly your environmental indicator and quantification technique in your instance. You mention GWP, OK, but how did you quantify this indicator?

3. Sensitivity.

OK.

4. Procedure to find best solution.

Your explanation is OK now but your technique is difficult to justify: How do you warranty to find the best solution? The relation between GA and KKT conditions is not stated. The justification for GA should be improved. You should also include an explanation about finding the best solution with GA, because is not direct.

5. Multiple solutions.

OK.

6. Literature review.

Much better. I also suggest to review other techniques (instead of GA). This point has to be included in the literature review, because your technique is not properly justified. Which other alternatives do you find in literature for problems as yours? Why your technique is better?

7. Objective functions and indicators.

Much better. Anyway, we need more detail in order to recommend the publication of your article.

The general explanation of your mathematical methodology is OK but your instance have to be fully clear. Please, list your objective functions and constraints in the case of bus tires. Mathematical expresions, quantification techniques and values. In your example, please be specific, not general. Please go back to the sense of your example: you present a general explanation and your example could be useful to illustrate the application of your method.

8. GA.

I think the same as before. Please, take the comment into consideration so as to recommend your article for publication. I remind my previous comment:

The use of Genetic algorithms (GA) is not properly justified. There are plenty other techniques. Why you cannot use formal optimization? You have continuous and differentiable functions, so proper techniques are related with gradient methods. Please, explain why do you have to use GA.

You looked for a way to provide derivatives in order to equalize to zero. This is an intuitive way to find KKT conditions in your system. I sustain the same: why not to use formal optimization? The problem of finding local (or global) optima with continuous, nonlinear, multivariable, and differentiable functions is well covered in control literature. Look for information from Lorenz Biegler or George Stephanopoulos, for instance.

9. Graphical method.

I understand you need an UB and LB, but: why to use a graphical method? As I mentioned before, in the 21st century you have to explain very well the use of graphical methods, because they are weak and difficult to systematize.

10. and 11. Novelty and presentation.

I appreciate your efforts to improve the article and include our comments. Nonetheless, I suggest to explain the novelty of your work to readers. Which question are you trying to answer with your research?, why your method is proper in comparison with other options?

Remark the novelty of your development and results.

For further assistance, please visit our customer support site at <http://help.elsevier.com/app/answers/list/p/7923>. Here you can search for solutions on a range of topics, find answers to frequently asked questions and learn more about EES via interactive tutorials. You will also find our 24/7 support contact details should you need any further assistance from one of our customer support representatives.

Note: Please write your text in good English (American or British usage is accepted, but not a mixture of these). Authors who require information about language editing and copyediting services pre- and post-submission please visit <http://webshop.elsevier.com/languageservices> or our customer support site at <http://help.elsevier.com/app/answers/list/p/7923> for more information.