



ScienceDirect

Journal of Cleaner Production

Supports *open access*

10.9
CiteScore

7.246
Impact Factor



Menu



Search in this journal

Submit your article ↗

Guide for authors ↗

Volume 67

Pages 1-292 (15 March 2014)

 Download full issue

[< Previous vol/issue](#)

[Next vol/issue >](#)

Receive an update when the latest issues in this journal are published

Sign in to set up alerts

Full text access

Editorial board

Page IFC

 Download PDF

Review article Abstract only

A meta-analysis investigation of the direction of the energy-GDP causal relationship: implications for the growth-degrowth dialogue

Panos Kalimeris, Clive Richardson, Kostas Bithas

Pages 1-13

[Purchase PDF](#) Article preview 

Review article Abstract only

Toward a research agenda for policy intervention and facilitation to enhance industrial symbiosis based on a comprehensive literature review

Wenting Jiao, Frank Boons

Pages 14-25

[Purchase PDF](#) Article preview 

Research article Abstract only

Communal rainwater tank systems design and economies of scale

Thulo Ram Gurung, Ashok Sharma

Pages 26-36

[Purchase PDF](#) Article preview 

Research article Abstract only

Design of water-using networks of multiple contaminants with two internal water mains

Hui-Peng Zhao, Wei-Nan Su, Zhi-Yong Liu

Pages 37-44

[Purchase PDF](#) Article preview 

Research article Abstract only

Comparison of black water source-separation and conventional sanitation systems using life cycle assessment

Charles Thibodeau, Frédéric Monette, Cécile Bulle, Mathias Glaus

Pages 45-57

[Purchase PDF](#) Article preview 

Research article Abstract only

Treatment of effluents from palm oil mill process to achieve river water quality for reuse as recycled water in a zero emission system

Mohd Ridzuan Othman, Mohd Ali Hassan, Yoshihito Shirai, Azhari Samsu Baharuddin, ... Juferi Idris

Pages 58-61

[Purchase PDF](#) Article preview 

Research article Abstract only

Solar water disinfection by a Parabolic Trough Concentrator (PTC): flow-cytometric analysis of bacterial inactivation

Riccardo Bigoni, Stefan Kötzsch, Sabrina Sorlini, Thomas Egli

Pages 62-71


[Purchase PDF](#) Article preview 

Research article Abstract only

Application of treated wastewater and digested sewage sludge to obtain biomass from *Cynara cardunculus* L

Pilar Mañas, Elena Castro, Jorge de las Heras

Pages 72-78

[Purchase PDF](#) Article preview 

Research article Abstract only

Life-cycle environmental and economic assessment of sewage sludge treatment in China

Changqing Xu, Wei Chen, Jinglan Hong

Pages 79-87

[Purchase PDF](#) Article preview 

Research article Abstract only

Environmental performance of waste-handlers

Mahelet G. Fikru

Pages 88-97

[Purchase PDF](#) Article preview 

Research article Abstract only

Modeling the leachate flow and aggregated emissions from municipal waste landfills under life cycle thinking in the Oceanic region of the Iberian Peninsula

Ana Camba, Sara González-García, Alba Bala, Pere Fullana-i-Palmer, ... Gumersindo Feijoo

Pages 98-106

[Purchase PDF](#) Article preview 

Research article Abstract only

More than financial investment is needed: food waste recycling pilots in Shanghai, China

Wenfang Huang, Jie Wang, Xingyi Dai, Mingran Li, Marie K. Harder

Pages 107-116

[Purchase PDF](#) Article preview 

Research article Abstract only

Sewage sludge/biomass ash based products for sustainable construction

Primož Pavšič, Ana Mladenovič, Alenka Mauko, Sabina Kramar, ... Peter Bukovec

Pages 117-124

[Purchase PDF](#) Article preview 

Short communication Abstract only

Sustainable construction with repurposed materials in the context of a civil engineering–architecture collaboration

Y. Sieffert, J.M. Huygen, D. Daudon

Pages 125-138

[Purchase PDF](#) Article preview 

Research article Abstract only

Green *Bambusa Arundinacea* leaves extract as a sustainable corrosion inhibitor in steel reinforced concrete

Salawu Abdulrahman Asipita, Mohammad Ismail, Muhd Zaimi Abd Majid, Zaiton Abdul Majid, ... Jahangir Mirza

Pages 139-146

[Purchase PDF](#) Article preview 

Research article Abstract only

Environmental and agronomical assessment of three fertilization treatments applied in horticultural open field crops

Roberto Quirós, Gara Villalba, Pere Muñoz, Xavier Font, Xavier Gabarrell

Pages 147-158

[Purchase PDF](#) Article preview 

Research article Abstract only

A fuzzy logic based aggregation method for life cycle impact assessment

Feri Afrinaldi, Hong-Chao Zhang

Pages 159-172

[Purchase PDF](#) Article preview 

Research article Abstract only

A comprehensive analysis of electric energy consumption of single point incremental forming processes

Giuseppe Ingarao, Hans Vanhove, Karel Kellens, Joost R. Duflou

Pages 173-186


[Purchase PDF](#) Article preview 

Research article Abstract only

Exergoenvironmental analysis of hybrid electric vehicle thermal management systems

H.S. Hamut, I. Dincer, G.F. Naterer

Pages 187-196

[Purchase PDF](#) Article preview 

Research article Abstract only

Optimizing the production scheduling of a single machine to minimize total energy consumption costs

Fadi Shrouf, Joaquin Ordieres-Meré, Alvaro García-Sánchez, Miguel Ortega-Mier

Pages 197-207

[Purchase PDF](#) Article preview 

Research article Abstract only

Affordability of energy cost increases for Korean companies due to market-based climate policies: a survey study by sector

Sunhee Suk, Xianbing Liu, Sang-youp Lee, Seokjin Go, Kinichi Sudo

Pages 208-219

[Purchase PDF](#) Article preview 

Research article Abstract only

Co-control of local air pollutants and CO₂ from the Chinese coal-fired power industry

X.Q. Mao, A. Zeng, T. Hu, Y.K. Xing, ... Z.Y. Liu

Pages 220-227

[Purchase PDF](#) Article preview 

Research article Abstract only

A comprehensive eco-efficiency model and dynamics of regional eco-efficiency in China

Jianhuan Huang, Xiaoguang Yang, Gang Cheng, Shouyang Wang

Pages 228-238

[Purchase PDF](#) Article preview 

Research article Abstract only

Collaboration capacity for sustainable supply chain management: small and medium-sized enterprises in Mexico

Bart van Hoof, Marcus Thiell

Pages 239-248

[Purchase PDF](#) Article preview 

Research article Abstract only

Eco-friendly manufacturing strategies for simultaneous consideration between productivity and environmental performances: a case study on a printed circuit board manufacturing

Jang-Yeop Kim, Suk-Jae Jeong, Yong-Ju Cho, Kyung-Sup Kim

Pages 249-257

[Purchase PDF](#) Article preview 

Research article Abstract only

Study on performance in dry milling aeronautical titanium alloy thin-wall components with two types of tools

Pan Ling Huang, Jian Feng Li, Jie Sun, Jun Zhou
Pages 258-264

[Purchase PDF](#) Article preview 

Research article Abstract only

Novel uses of SiO₂ nano-lubrication system in hard turning process of hardened steel AISI4140 for less tool wear, surface roughness and oil consumption

Mohd Sayuti, Ahmed A.D. Sarhan, Faheem Salem
Pages 265-276

[Purchase PDF](#) Article preview 

Research article Abstract only

A cleaner production of rice husk-blended polypropylene eco-composite by gas-assisted injection moulding

R.C.M. Yam, D.M.T. Mak
Pages 277-284

[Purchase PDF](#) Article preview 

Research article Abstract only

Influence of acidic strength on the catalytic activity of Brønsted acidic ionic liquids on synthesizing cyclic carbonate from carbon dioxide and epoxide

Lin-Fei Xiao, Dong-Wei Lv, Dan Su, Wei Wu, Hong-Feng Li
Pages 285-290

[Purchase PDF](#) Article preview 

Short communication Abstract only

Conference report 7th International Conference on Environmental Engineering and Management ICEEM07

Carmen Teodosiu, Anton Friedl, Krzysztof Urbaniec
Pages 291-292

[Purchase PDF](#) Article preview 

[< Previous vol/issue](#)

[Next vol/issue >](#)

ISSN: 0959-6526

Copyright © 2021 Elsevier Ltd. All rights reserved



Copyright © 2021 Elsevier B.V. or its licensors or contributors.
ScienceDirect® is a registered trademark of Elsevier B.V.



Journal of Cleaner Production

Editor-in-Chief

Professor Don Huisingh

The Institute for a Secure and Sustainable Environment (ISSE), University of Tennessee, 311 Conference Center Building, Knoxville; TN 37996-4134, USA. E-mail: donalduisingh@comcast.net

Subject Editors:

Technology, Policy, and Sustainability:

Professor Philip J. Vergragt, Tellus Institute, 11 Arlington Street, Boston, MA 02116-3411, USA. E-mail: pvergragt@tellus.org

Cleaner Production Tools (e.g. Life Cycle Assessment):

Dr. D. Meyer, U.S. Environmental Protection Agency, National Risk Management Research Laboratory, 26 W. Martin Luther King Drive, Cincinnati, Ohio 45268, USA. E-mail: meyer.david@epa.gov

Education and organisational change for sustainability:

Dr. Rodrigo Lozano, Utrecht University, Utrecht, Netherlands. E-mail: rodlozano@org-sustainability.com

Industrial Applications:

Prof. J. Klemesš, Centre for Process Integration and Intensification CPI², Research Institute for Chemical and Process Industry, Faculty of Information Technology, University of Pannonia, Egyetem utca 10, H-8200 Veszprém, Hungary. E-mail: klemes@cpi.uni-pannon.hu

Latin American Aspects of Cleaner Production Education and Research:

A. Rodríguez-Abitia, Procuraduría Federal de Protección al Ambiente, Carretera Picacho-Ajusco 200, Col. Jardines en la Montaña, Del. Tlalpan, C.P. 14210, México D.F. E-mail: arodriguez@profepa.gob.mx

Sustainable Product Design:

Dr. Han Brezet, TU Delft, Faculty of Industrial Design, Landbergstraat 15, 2628 CE Delft, Netherlands. E-mail: J.C.Brezet@tudelft.nl

Corporate Sustainability, CSR and Industrial Ecology:

Prof. R.J. Baumgartner, Institute for Systems Science, Innovation and Sustainability Research University of Graz Merangasse 18/I; 8010 Graz, Austria. E-mail: rupert.baumgartner@uni-graz.at

Hydrogen for Sustainability:

Prof. Krzysztof Urbaniec, CERED Centre of Excellence, Warsaw University of Technology Jachowicza 2/4, 09-402 Plock, Poland
E-mail: K.Urbaniec@mbox.pw.edu.pl

Sustainability and Supply Chain Management

Dr. Stefan Seuring, Chair of Supply Chain Management, Faculty of Business and Economics, University of Kassel, Untere Königsstr. 71 34117 Kassel, Germany, Tel. +49 561 804 7515, Fax +49 561 804 7514, E-mail: mana@uni-kassel.de

Sustainable governance of material and energy flows:

Frank Boons, Erasmus University Rotterdam, Faculteit der Sociale Wetenschappen, Capaciteitsgroep Bestuurskunde, Burgemeester Oudlaan 50, PO Box 1738 3000 DR, Rotterdam, The Netherlands. E-mail: w.eur.nl

Asian Aspects of Cleaner Production Implementation, Research & Ed

Y.T Wang, Shandong University, Jinan, China.

Cleaner Production in Latin America

C.M.V.B Almeida, Paulista University, São Paulo, Brazil.

Sustainability in the Resources Sector

Dr. C. Moran, University of Queensland, St. Lucia, QLD, Australia. E-mail: chris.moran@uq.edu.au

International Editorial Board

Y. Al Saleh, Masdar Institute of Science and Technology, P.O. Box 54224, Abu Dhabi, United Arab Emirates

A.V. Arvanitis, Biopolitics International Organisation, Athens, Greece

N.A. Ashford, Centre for Technology, Policy and Industrial Development, Massachusetts Institute of Technology, Room E-40-23, Cambridge, MA 02139, USA

L. Baas, Linköping Universitet, IEI, Room 3A:904, 581 83 Linköping, Sweden

H. von Blottnitz, University of Cape Town, Cape Town, South Africa

S.H. Bonilla, Programa de Pós-Graduação em Engenharia de Produção, Universidade Paulista, Rua Dr. Bacelar 1212, CEP 04026-002, São Paulo, Brazil

P. Cerin, Unit of Economics, Royal Institute of Technology, Stockholm, and Unit of Accounting and Finance, Umeå School of Business, Umeå

N.-B. Chang, Department of Civil and Environmental Engineering, University of Central Florida, 4000 Central Florida Blvd., Orlando, FL 32816, USA

A.S.F. Chiu, Center for Engineering and Sustainable Development Research, De La Salle University, 2401 Taft Avenue, 1006 Manila, Philippines

K. Christiansen, Projektleder (Project Manager), Dansk Standard (Danish Standards), Kollegievej 6, DK-2920 Charlottenlund, Denmark

G.N. Demirel, Middle East Technical University, Ankara, Turkey

P.D. Eagan, University of Wisconsin-Madison, WI, USA

S. El-Haggar, Mechanical Engineering Department, The American University in Cairo, New Cairo, Egypt

D. Ferrer, Universitat Politècnica de Catalunya, Barcelona, Spain

G. Finnveden, Centre for Environmental Strategies Research—fms, Royal Institute of Technology (KTH), Stockholm, Sweden

B.F. Giannetti, Paulista University, São Paulo, Brazil

S. Gold, University of Neuchâtel, Faculty of Economics, Enterprise Institute, Rue A.-L. Breguet 1, 2000 Neuchâtel, Switzerland

F. Granek, The Bloom Centre for Sustainability (BLOOM), Mississauga, Canada

O.J. Hansson, Stiftelsen Ostfoldforskning, Frederikstad, Norway

J. Haselip, Technical University of Denmark, Risø National Laboratory for Sustainable Energy, Frederiksborgvej 399, P.O. Box 49, Building 142 (Risø DTU), 4000 Roskilde, Denmark

G.M. Hilson, Chair of Sustainability in Business The Surrey Business School Faculty of Business, Economics and Law University of Surrey Guildford GU2 7XH.

G.J. Hyfantis Jr., Quantum Environmental & Engineering Services, LLC, Knoxville, TN, USA

V. Jegatheesan, School of Engineering, Deakin University, Geelong, VIC 3217, Australia

B. Kothuis, Global Corporate Consultancy, Antea Group, Cape Town, South Africa

C. Luttrupp, KTH, Stockholm, Sweden

D. Mebratu, UNEP-ROA Programme Officer, PO Box 47074, Nairobi 00100, Kenya

G. Miller, Waste Management and Research Centre, One East Hazelwood Drive, Champaign, IL 61820, USA

M. Overcash, Department of Industrial and Manufacturing Engineering Wichita State University, Wichita, KS, USA

B. Ramos, Department of Environmental Sciences and Engineering, Faculty of Sciences and Technology, New University of Lisbon, 2829-516 Caparica, Portugal

D. Reeve, Cleaner Production Australia, Eltham, VA, Australia

H. Schnitzer, University Graz, Austria

L. Stone, The University of Auckland, Private Bag 92019, Auckland 1142, New Zealand

M. Suzuki, International University of Japan, Niigata, Japan

S. Thorneloe, U.S. Environmental Protection Agency (EPA), Research Triangle Park, NC, USA

V.K.K. Upadhyayula, PhD, Sustainable Technologies Division, National Risk Management Research Laboratory, United States Environmental Protection Agency

G. Zilahy, Associate Professor, Corvinus University of Budapest, 8 Fovam ter, 1093 Budapest, Hungary



Document details

1 of 1

[Export](#) [Download](#) [More... >](#)

Journal of Cleaner Production
Volume 67, 15 March 2014, Pages 159-172

A fuzzy logic based aggregation method for life cycle impact assessment (Article)

Afrinaldi, F., Zhang, H.-C.

[View additional authors](#) [Save all to author list](#)^aDepartment of Industrial Engineering, Texas Tech University, Lubbock, TX 79409-3061, United States^bDepartment of Industrial Engineering, Andalas University, Padang 25163, Indonesia[View additional affiliations](#)

Abstract

The objective of this paper is to propose an alternative methodology for normalization and aggregation in life cycle assessment (LCA). The proposed normalization approach is based on target on emission reduction and the aggregation approach is done through fuzzy inference system. A sensitivity analysis methodology is also presented in order to quantify the magnitude of change in index of total environmental improvement when quantity of a particular emission changes. Index of total environmental improvement of a product is computed by utilizing the proposed methodology in order to demonstrate its applicability. The results show that the methodology is simple and effective.

© 2013 Elsevier Ltd. All rights reserved.

SciVal Topic Prominence

Topic: Life Cycle Impact Assessment | Elementary Flow | Product Environmental Footprint

Prominence percentile: 99.156

Author keywords

[Aggregation](#) [Fuzzy logic](#) [LCA](#) [Normalization](#)

ISSN: 09596526

CODEN: JCROE

Source Type: Journal

Original language: English

DOI: 10.1016/j.jclepro.2013.12.010

Document Type: Article

Cited by 22 documents

Adak, S. , Jana, S.

A model to assess dengue using type 2 fuzzy inference system

(2021) Biomedical Signal Processing and Control

Khelifa, M.-R. , Ziane, S. , Mezhoud, S.

Compared Environmental Impact Analysis of Alfa and Polypropylene Fibre-Reinforced Concrete

(2021) Iranian Journal of Science and Technology - Transactions of Civil Engineering

Meng, K. , Cao, Y. , Peng, X.

Smart recovery decision-making for end-of-life products in the context of ubiquitous information and computational intelligence

(2020) Journal of Cleaner Production[View details of all 22 citations](#)

Inform me when this document is cited in Scopus:

[Set citation alert >](#)[Set citation feed >](#)

Related documents

Find more related documents in Scopus based on:

[Authors >](#) [Keywords >](#)

Afrinaldi, F.; Department of Industrial Engineering, Texas Tech University, United States;

© Copyright 2014 Elsevier B.V., All rights reserved.

About Scopus

[What is Scopus](#)
[Content coverage](#)
[Scopus blog](#)
[Scopus API](#)
[Privacy matters](#)

Language

[日本語に切り替える](#)
[切换到简体中文](#)
[切换到繁體中文](#)
[Русский язык](#)

Customer Service

[Help](#)
[Contact us](#)

ELSEVIER

[Terms and conditions ↗](#) [Privacy policy ↗](#)

Copyright © Elsevier B.V. [↗](#). All rights reserved. Scopus® is a registered trademark of Elsevier B.V.

We use cookies to help provide and enhance our service and tailor content. By continuing, you agree to the use of cookies.

 RELX



Ads by Google

Stop seeing this ad

Why this ad? ⓘ

Journal of Cleaner Production

COUNTRY

Netherlands



Universities and research institutions in Netherlands

SUBJECT AREA AND CATEGORY

Business, Management and Accounting Strategy and Management

Energy Renewable Energy, Sustainability and the Environment

Engineering Industrial and Manufacturing Engineering

Environmental Science Environmental Science (miscellaneous)

PUBLISHER

Elsevier Ltd.

H-INDEX

173

PUBLICATION TYPE

Journals

ISSN

09596526, 18791786

COVERAGE

1993-2020

INFORMATION

[Homepage](#)

[How to publish in this journal](#)

[Contact](#)



Ads by Google

Stop seeing this ad

Why this ad? ⓘ



Ads by Google

Stop seeing this ad Why this ad? ⓘ

SCOPE

The Journal of Cleaner Production is an international, transdisciplinary journal focusing on Cleaner Production, Environmental, and Sustainability research and practice. Through our published articles, we aim at helping societies become more sustainable. 'Cleaner Production' is a concept that aims at preventing the production of waste, while increasing efficiencies in the uses of energy, water, resources, and human capital. The Journal of Cleaner Production serves as a platform for addressing and discussing theoretical and practical cleaner production, encompassing environmental, and sustainability issues in corporations, governments, education institutions, regions, and societies. Subject areas include, but are not limited to: -Cleaner production and technical processes -Sustainable Development and Sustainability -Sustainable Consumption -Environmental and sustainability assessment -Sustainable Products and Services -Corporate sustainability and Corporate Social Responsibility -Education for Sustainable Development -Governance, legislation, and policy for sustainability

 Join the conversation about this journal



Ads by Google

Stop seeing this ad Why this ad? ⓘ



FIND SIMILAR JOURNALS ?


<p>1 Sustainable Production and Consumption NLD</p> <p>86% similarity</p>	<p>2 Management of Environmental Quality GBR</p> <p>57% similarity</p>	<p>3 Resources, Conservation and Recycling NLD</p> <p>55% similarity</p>	<p>4 Clean Techn Environmen DEU</p> <p>4 s</p>
---	--	--	--

Ads by Google


Stop seeing this ad

Why this ad? ⓘ


SJR

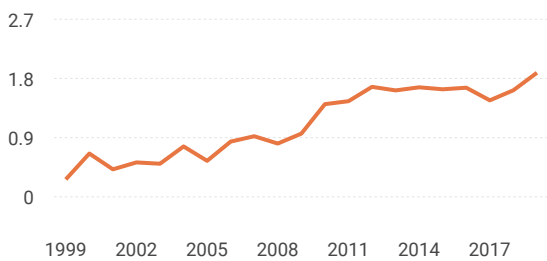





Total Cites Self-Cites

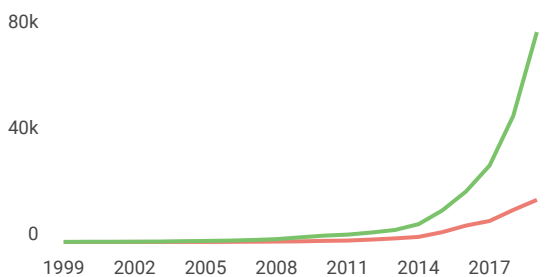

Citations per document

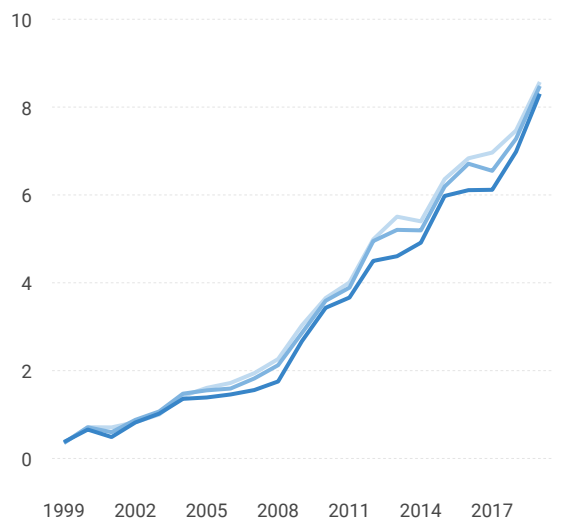

- Cites / Doc. (4 years)
- Cites / Doc. (3 years)
- Cites / Doc. (2 years)

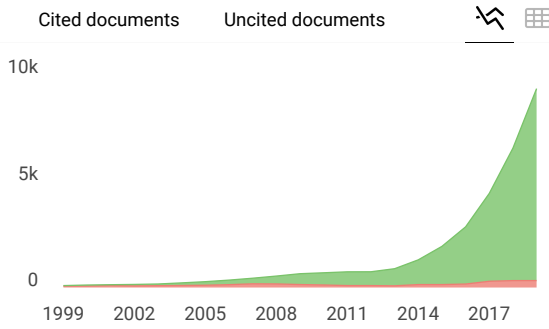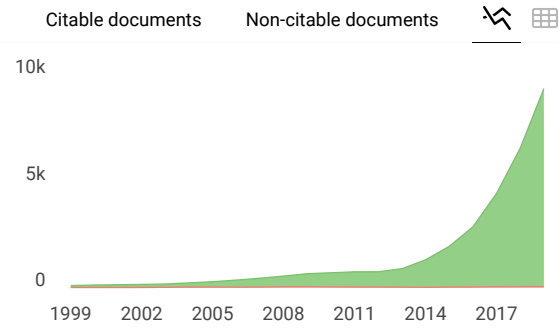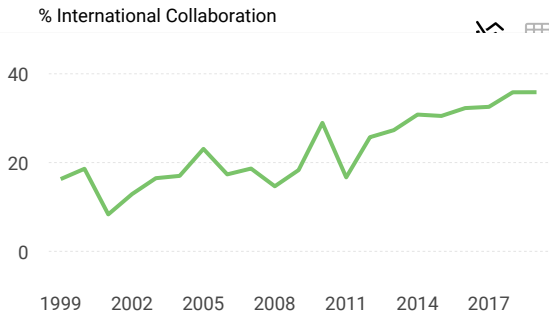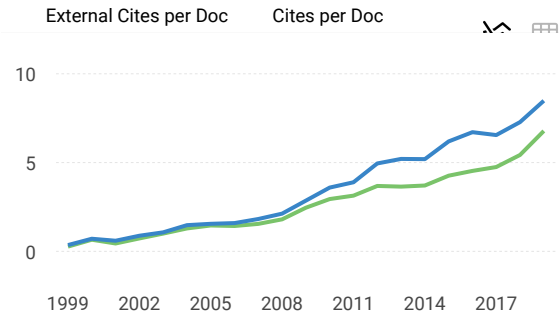

Journal of Cleaner Production

Q1 Environmental Science (miscellaneous) best quartile

SJR 2019 1.89

powered by scimagojr.com

← Show this widget in your own website

Just copy the code below and paste within your html code:

```
<a href="https://www.scimagojr.com" style="color: #e67e22; text-decoration: none; font-weight: bold;">Journal of Cleaner Production</a>
```

←

Ads by Google

Stop seeing this ad Why this ad? ⓘ

Metrics based on Scopus® data as of April 2020

A **AZIZUL KHOLIS** 1 week ago

Dear
please inform me, about the Celaner production journal, is it a specialis for environment issues only?

Regards

reply



Melanie Ortiz 1 week ago

Dear Azizul,
thank you for contacting us.

SCImago Team

Unfortunately, we cannot help you with your request, we suggest you visit the journal's homepage or contact the journal's editorial staff , so they could inform you more deeply.
Best Regards, SCImago Team

N **Nuryusnita** 4 months ago

Good day

May I know where to check for how many issues published by certain journal publication?

thank you

Regard,
Yusnita

reply



Melanie Ortiz 4 months ago

SCImago Team

Dear Nuryusnita,
thank you for contacting us.
We suggest you consult that information in the journal's website.
Best Regards, SCImago Team

Y **Yolanda Bermudez** 6 months ago

Dear Sr. Could you tell me when you will receive articles? We are interesting to send you an article about Circular economy and strategy.

Thanks

Yolanda Bermúdez

reply



Melanie Ortiz 5 months ago

SCImago Team

Dear Yolanda,
thank you for contacting us.
We are sorry to tell you that SCImago Journal & Country Rank is not a journal. SJR is a portal with scientometric indicators of journals indexed in Elsevier/Scopus.
Unfortunately, we cannot help you with your request, we suggest you visit the journal's homepage (See submission/author guidelines) or contact the journal's editorial staff , so they could inform you more deeply.
Best Regards, SCImago Team

A **amir** 9 months ago

dear Admin
Hello

how can i find 2019 and 2020 quartile in your website?

reply



Melanie Ortiz 9 months ago

SCImago Team

Dear Amir,

Thank you for contacting us. Our data come from Scopus, they annually send us an update of the data. This update is sent to us around April / May every year. Thus, the indicators for 2019 will be available in June 2020. Best Regards, SCImago Team

C **chakim** 10 months ago

Dear editorial staff

I am writing journal for my study in Universitas Esa Unggul, Indonesia.
It is very difficult to find journal with title :

Huang, X.X.; Hu, Z.P.; Liu, C.S.; Yu, D.J., and Yu, L.F., 2016.
An examination of corporate reporting environmental management practices and firm performance. Journal of Cleaner Production, 112, 3456-3433.

Can you help me to find this journal in this proquest search.

Thank you

reply

D **DK** 9 months ago

Not sure if this is what you are looking for.

<https://doi.org/10.1016/j.jom.2006.10.003>



Melanie Ortiz 10 months ago

SCImago Team

Dear Sir/Madam,

thank you for contacting us.

We are sorry to tell you that SCImago Journal & Country Rank is not a journal. SJR is a portal with scientometric indicators of journals indexed in Elsevier/Scopus.

Unfortunately, we cannot help you with your request, we suggest you to contact the journal's editorial staff , so they could inform you more deeply.

Best Regards, SCImago Team

D **dina zaman** 1 year ago

Can anyone throw some light on the word limit for a review article in this journal. The author information guide states that the limit is 12000 words, but does not mention if it includes the references, abstract, tables etc.

thanks

reply

D **David Ruiz** 1 year ago

They are between 6000-8000 words without references, counting tables and figures.



Melanie Ortiz 1 year ago

SCImago Team

Dear Dina

thank you for contacting us. We suggest you to contact the journal's editorial staff , so they could inform you more deeply. Best Regards, SCImago Team

Y **your** 2 years ago

subscribe

reply

Leave a comment

Name

Email

(will not be published)

I'm not a robot reCAPTCHA
Privacy - Terms

Submit

The users of Scimago Journal & Country Rank have the possibility to dialogue through comments linked to a specific journal. The purpose is to have a forum in which general doubts about the processes of publication in the

journal, experiences and other issues derived from the publication of papers are resolved. For topics on particular articles, maintain the dialogue through the usual channels with your editor.

Developed by:



Powered by:



Follow us on @ScimagoJR

Scimago Lab, Copyright 2007-2020. Data Source: Scopus®

EST MODUS IN REBUS

Horatio (Satire 1, 1, 106)

JCLP-Fuzzy Logic

by Feri Afrinaldi

Submission date: 14-Feb-2021 10:04PM (UTC+0800)

Submission ID: 1509135028

File name: IIIA1C5-JCLP_--_A_fuzzy_logic.pdf (2.53M)

Word count: 8406

Character count: 43050



Contents lists available at ScienceDirect

Journal of Cleaner Production

journal homepage: www.elsevier.com/locate/jclepro

A fuzzy logic based aggregation method for life cycle impact assessment

Feri Afrinaldi^{a, b, *}, Hong-Chao Zhang^a^a Department of Industrial Engineering, Texas Tech University, Lubbock, TX 79409-3061, USA^b Department of Industrial Engineering, Andalas University, Padang 25163, Indonesia

ARTICLE INFO

Article history:

Received 25 April 2013

Received in revised form

27 November 2013

Accepted 6 December 2013

Available online 15 December 2013

Keywords:

Aggregation
Fuzzy logic
LCA
Normalization

ABSTRACT

The objective of this paper is to propose an alternative methodology for normalization and aggregation in life cycle assessment (LCA). The proposed normalization approach is based on target on emission reduction and the aggregation approach is done through fuzzy inference system. A sensitivity analysis methodology is also presented in order to quantify the magnitude of change in index of total environmental improvement when quantity of a particular emission changes. Index of total environmental improvement of a product is computed by utilizing the proposed methodology in order to demonstrate its applicability. The results show that the methodology is simple and effective.

© 2013 Elsevier Ltd. All rights reserved.

1. Introduction

Resource depletion, global warming, climate change and other environmental problems increase society's environmental awareness. As a result, businesses and industries are forced to measure and reduce their environmental impact. One of the tools that can be used is life cycle assessment (LCA). According to ISO standards, LCA consists of four phases: (1) goal definition and scoping, (2) inventory analysis, (3) life cycle impact assessment (LCIA) and (4) interpretation (ISO 14044, 2006). Furthermore, LCIA is composed by (EPA, 2006): (1) impact categories selection and definition, (2) classification, (3) characterization, (4) normalization, (5) grouping, (6) weighting and (7) evaluating and reporting. ISO standards state that the first three steps are compulsory. Normalization, grouping and weighting are optional. However, normalization and weighting can add valuable information to the decision makers because normalization allows impact to be compared among impact categories and weighting reflects stakeholders' goals and values (Hertwich and Pease, 1998; EPA, 2006).

1.1. Normalization and weighting in LCA

Regarding the reference value of normalization in LCA, Guinée et al. (2002) states that,

* Corresponding author. Department of Industrial Engineering, Texas Tech University, Lubbock, TX 79409-3061, USA. Tel.: +1 806 319 1551.

E-mail addresses: feri.afinaldi@ttu.edu, f_afinaldi@yahoo.com (F. Afrinaldi).

0959-6526/\$ – see front matter © 2013 Elsevier Ltd. All rights reserved.
<http://dx.doi.org/10.1016/j.jclepro.2013.12.010>

"The reference information may relate to a given community (e.g. The Netherlands, Europe or the World), person (e.g. Danish citizen) or other system, over a given period of time. Other reference information may also be adopted, of course, such as future target situation."

Therefore, it is possible to use targets as the reference value of LCA normalization process.

In weighting, the use of distance to target method receives criticisms. In this paper the criticism is explained by using the mathematical derivation found in Lee (1999). The normalized impact for impact category type i is given by,

$$NI_i = \frac{CI_i}{N_i} \quad (1)$$

where NI_i is the normalized impact on impact category i , CI_i is the characterized impact and N_i is the reference value. The weighted impact (WI_i) is the product of NI_i and a weighing factor W_i ,

$$WI_i = NI_i \times W_i \quad (2)$$

According to the distance to target method (Lee, 1999),

$$W_i = \frac{N_i}{T_i} \quad (3)$$

T_i denotes the target.

Substituting (1) and (3) to (2) results,

$$WI_i = \frac{CI_i N_i}{N_i T_i} = \frac{CI_i}{T_i} \quad (4)$$

Guinée et al. (2002), Seppälä and Hämäläinen (2001), Finnveden (1999) and Lee (1999) argue that Equation (4) proves that the distance to target method is not a weighting method, but just another form of normalization. Moreover, they agree that it fails reflecting the relative significance among impact categories because it assumes that all targets are equally important. Finnveden (1999) states that,

"The available distance-to-target methods are all based on the assumption that all targets are equally important. This is a critical assumption, which apparently has never been justified."

By considering this, Lee (1999), Eco-Indicator 99 (Goedkoop and Spriensma, 2000) and Impact 2002+ (Joliet et al., 2003) use the following equation,

$$WI_i = \frac{CI_i}{N_i} f_i \quad (5)$$

where the value of f_i reflects the relative significance/seriousness of impact/damage category i , and in some methods N_i is expressed as impact/damage per year per capita.

It is clear that, in Equation (5), the normalized impact CI_i/N_i is not aimed to facilitate the weighting process, and that is why f_i is presented. To determine f_i , Lee (1999) uses Analytical Hierarchy Process (AHP), Eco-Indicator 99 uses panel approach, and Impact 2002+ applies the mixing triangle approach. However, the value of f_i provided by the above approach may not reflect stakeholders' values and goals of a particular LCA study. That is why Eco-Indicator 99 methodology report (Goedkoop and Spriensma, 2000) states that *"In any case we encourage users to critically analyze the default weighting factors presented in this project (Eco-Indicator 99) and to propose other factors"*.

Furthermore, problems may also arise with the use of N_i . In Eco-indicator 99, Impact 2002+, and CML 2001 (Guinée et al., 2002), European data is used and some values of N_i contains uncertainty because of lack of data on emissions for individual substances, lack of data for most European countries, lack of data for ozone layer depletion, and lack of data on heavy metals and pesticides emission to soil and water (Goedkoop and Spriensma, 2000).

28 Fuzzy inference system in LCA

Fuzzy inference system was introduced for the first time in 1965 by Zadeh (1965). It is widely used to elicit expert knowledge and model the human thinking process. Numerous authors also proposed the application of fuzzy inference system in LCA. Liu et al. (2012) used fuzzy set theory to quantify the probabilities and the severity of the impacts in a method combining risk assessment, LCA and multi criteria decision analysis. Benetto et al. (2007) applied fuzzy set theory to assess the impact of noise to humans due to lack of data, uncertainties and vagueness in noise impact assessment. Similarly, fuzzy set theory was also applied by Weckenmann and Schwan (2001) to handle uncertainty in inventory data. Güereca et al. (2007) proposed a two stages method, partial indicator acquisition and fuzzification, for LCIA valuation step. Seppälä (2007) improved and compared the fuzzy approach presented in Güereca et al. (2007) to the "traditional" valuation technique of LCA. González et al. (2002) simplified LCA process by fuzzifying the magnitude of the emissions.

It can be seen that the applications of fuzzy set theory in LCA are to handle uncertainty, to simplify LCA process by fuzzifying the

34 magnitude of emissions and to value the characterization results in order to show the significance of impact category. For the latter application, by continuing fuzzy inference process to fuzzy IF-THEN rules, rule implication, aggregation and defuzzification, a single index can be resulted.

1.3. Objective of this paper

41 This paper attempts to improve the weaknesses found in the distance to target method and of using N_i as the reference value in the LCA normalization and weighting processes by proposing an alternative methodology. For impact assessment, the end-point approach is used in the proposed methodology. The proposed methodology allows sub damage categories and damage categories to be normalized and aggregated in order to produce an index of total environmental improvement. It is called an index of total environmental improvement because the proposed normalization procedure is based on the targets on emission reduction.

In order to quantify the significance among sub damage categories and damage categories, the dimensionless numbers produced by the normalization processes are treated as the inputs for the "weighting" processes. This process is done through fuzzy membership functions and fuzzy IF-THEN rules. The outputs of the above process are then aggregated by using fuzzy aggregation and defuzzification techniques. The result of the defuzzification process is the basis to compute index of total environmental improvement. The parameter of fuzzy membership functions and the structure of fuzzy IF-THEN rules are determined by the values and goals of the stakeholders.

The structure of the fuzzy inference system presented in this paper is based on Andriantiatsaholiniaina et al. (2004). The fundamental difference is that in Andriantiatsaholiniaina et al. (2004) the inputs for the normalization process are the environmental interventions, such as greenhouse gas emissions, NO₂ concentration and SO₂ concentration (quite similar to Gonzales et al. (2002)). The issue with their approaches is that it ignores the characterization step of LCA. Therefore, the magnitude of impacts/damages will never be known. Moreover, it does not seem appropriate to directly fuzzify the environmental loads because the relation between the loads and their damage categories is clear. In the proposed approach, the characterization process is done first and followed by the normalization process. Damage factors (before being normalized and weighted) provided by the existing methodologies (Eco-Indicator 99) is used to calculate damage on each sub damage category.

2. Material and methods

The proposed methodology consists of five steps: (1) normalize the damage value of each sub damage category, (2) aggregate the sub damage categories to their damage category using the fuzzy inference system, (3) normalize the defuzzification outputs of the fuzzy inference system applied to aggregate sub damage categories to produce index of environmental improvement for damage category, (4) aggregate the index of environmental improvement for damage category using the fuzzy inference system, and (5) normalize the defuzzification outputs of the fuzzy inference system applied for the index of environmental improvement for damage category to produce the index of total environmental improvement. It is shown by Fig. 1.

2.1. Normalize the damage value of each sub damage category

This normalization process is done for each sub damage category and will make fuzzy inference system possible. Outputs of this

process, the normalized sub damage categories, are in the interval $[0, 1]$, where zero is the worst and one is the best. The proposed normalization technique is based on the targeted reduction of emissions. Before formulating the equations for normalization, let us define $i = 1, 2, \dots, I$ be substances in the life cycle inventory (LCI) table, $j = 1, 2, \dots, J$ be sub damage categories and $k = 1, 2, \dots, K$ be damage categories. Furthermore, let us define the following.

- BY = base year.
- EY = evaluated year.
- TY = target year.
- H_j^k = value of damage on sub damage category j which belongs damage category k in base year.
- H_j^k = value of damage on sub damage category j which belongs damage category k in evaluated year.
- \tilde{H}_j^k = targeted value of damage on sub damage category j which belongs damage category k in evaluated year.
- \tilde{x}_{ij}^k = amount of substance type i emitted in base year which belongs to sub damage category j of damage category k .
- x_{ij}^k = amount of substance type i emitted in evaluated year which belongs to sub damage category j of damage category k .
- h_{ij}^k = damage factor of substance type i which belongs to sub damage category j of damage category k .
- α_{ij}^k = emission reduction of substance i to be achieved in target year which belongs to sub damage category j of damage category k , $0 < \alpha_{ij}^k < 1$.

NH_j^k = the normalized value of damage on sub damage category j of damage category k .

The normalized value of damage on a particular sub damage category is modeled as the following. First, a target year, base year and how much reduction of emission (usually in percentage) desired in the target year relative to the emission in the base year are defined. The percentages of reduction may come from internal, national or regional target. By using damage factors provided by Eco-Indicator 99 total damage on a particular sub damage category in the reference year and evaluated year can be calculated by using Equations (6)–(8). Furthermore, the target on a particular sub damage category in the evaluated year can be evaluated by utilizing the percentage of reduction. If, in the evaluated year, total damage on a particular sub damage category is less than or equal to the target then the normalized value of damage on that particular sub damage category is set to be 1, if total damage on a particular sub damage category is greater than or equal to the total damage in the base year then the normalized value of damage on that particular sub damage category is set to be 0, otherwise, the normalized value of damage is in the interval $(0, 1)$ meaning that the target cannot be achieved but total emission is lower than the emission in the base year. The normalized damage value is calculated by using Equation (9). If equation (9) is plotted then its shape is trapezoidal as shown by Fig. 2. The notation for Equation (9) and the formulas used to

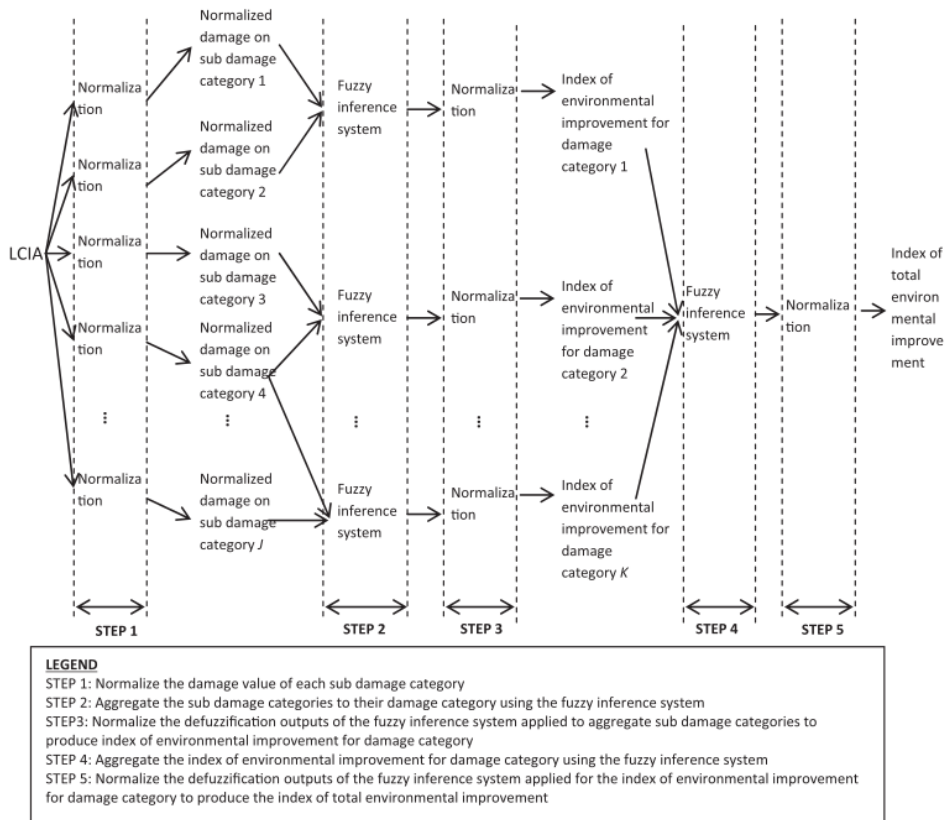


Fig. 1. Proposed method.

express membership functions, discussed in the next sections, follow the notations found in Mathworks (2013).

$$\tilde{H}_j^k = \sum_{i=1}^I h_{ij}^k x_{ij}^k \quad (6)$$

$$H_j^k = \sum_{i=1}^I h_{ij}^k x_{ij}^k \quad (7)$$

$$\tilde{H}_j^k = \sum_{i=1}^I h_{ij}^k x_{ij}^k \left[1 - \alpha_{ij}^k \frac{EY - BY}{TY - BY} \right] \quad (8)$$

$$NH_j^k = \max \left\{ \min \left\{ 1, \frac{\tilde{H}_j^k - H_j^k}{\tilde{H}_j^k - \tilde{H}_j^k} \right\}, 0 \right\} \quad (9)$$

2.2. Aggregate the sub damage categories to their damage category using the fuzzy inference system

After sub damage categories are normalized, now fuzzy inference system for the normalized damage values can be conducted. In this methodology Mamdani's fuzzy inference process is applied because it is intuitive, mostly used and fits human thinking process (Sivanandam et al., 2007). The Mamdani's fuzzy inference process consists of five steps: (1) define and fuzzify input variables, (2) define and fuzzify output variables, (3) fuzzy IF-THEN rules, (4) rule implication, (5) aggregation and defuzzification (Sivanandam et al., 2007).

2.2.1. Input variables

The normalized value of sub damage category j w_{20} belongs to damage category k , NH_j^k , is used as input variable. A membership function is then used to obtain the degree of membership of NH_j^k in a linguistic variable v_p , $p = 1, 2, \dots, P$. As an example, the linguistic variables may be defined as $v_1 = bad$, $v_2 = good$ and $v_3 = very good$. The membership function of NH_j^k in linguistic variable v_p is denoted as $\mu_{v_p}(NH_j^k)$. The formulas for $\mu_{v_p}(NH_j^k)$ are given by Equations (10)–(12), where $a, b, c, d \in [0, 1]$ are the parameters of the membership functions. If Equations (10)–(12) are plotted then they will follow trapezoidal shape as shown by Fig. 3. The value of $\mu_{v_p}(NH_j^k)$ represents the "grade of truth" of NH_j^k to be in linguistic variable v_p . Note that the membership function can only take value of real number in the interval $[0, 1]$ (Zadeh, 1965). Therefore $\mu_{v_p}(NH_j^k) \in [0, 1]$ for every v_p, j, k and for any forms of membership function.

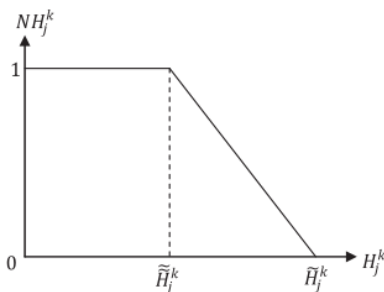


Fig. 2. The normalization function of sub damage category j of damage category k .

$$\mu_{v_p}(NH_j^k) = \max \left\{ \min \left\{ \frac{NH_j^k - a}{b - a}, 1, \frac{d - NH_j^k}{d - c} \right\}, 0 \right\}, a \neq b \neq c \neq d \quad (10)$$

$$\mu_{v_p}(NH_j^k) = \max \left\{ \min \left\{ \frac{NH_j^k - a}{b - a}, 1 \right\}, 0 \right\}, a \neq b, c = d \quad (11)$$

$$\mu_{v_p}(NH_j^k) = \max \left\{ \min \left\{ 1, \frac{d - NH_j^k}{d - c} \right\}, 0 \right\}, a = b, c \neq d \quad (12)$$

2.2.2. Output variables

The fuzzy set of damage categories, denoted as H^k , are defined to be output variables. In order to formulate the membership functions of H^k , consider $w_q, q = 1, 2, \dots, Q$, be the linguistic variable for a damage category. In example, the linguistic variables may be defined as $w_1 = very low$, $w_2 = low$, $w_3 = medium$, $w_4 = high$, $w_5 = very high$. The degree of membership of H^k in linguistic variable w_q , denoted as $\mu_{w_q}(H^k)$, is quantified by using a membership function. If the membership function of H^k follows the trapezoidal form then the formula for $\mu_{w_q}(H^k)$ is similar to the Equations (10)–(12). If it is triangular then $\mu_{w_q}(H^k)$ is given by Equation (13). Fig. 4 plots the triangular membership function of $\mu_{w_q}(H^k)$.

$$\mu_{w_q}(H^k) = \max \left\{ \min \left\{ \frac{H^k - a}{b - a}, \frac{c - H^k}{c - b} \right\}, 0 \right\}, a \neq b \neq c \quad (13)$$

2.2.3. Fuzzy IF-THEN rule

Fuzzy IF-THEN rules are used to link the linguistic variables of sub damage categories and the linguistic variables of damage categories. Rule is denoted as $r = 1, 2, \dots, R$. The form of IF-THEN rule is shown by Table 1.

Below is an example of fuzzy IF-THEN rules.

Sub damage categories: Damage on resources caused by extraction of minerals and damage on resources caused by extraction of fossil fuels.

Damage category: resources

Rule 1: If (extraction of fossil fuels is "Bad") and (extraction of minerals is "Bad") then (Resources is "Very Low")

Rule 2: If (extraction of fossil fuels is "Bad") and (extraction of minerals is "Good") then (Resources is "Low")

2.2.4. Rule implication

Rule implication is the process of combining fuzzy input variable and fuzzy output variable to a fuzzy set and it is done for each rule. In this methodology, the Mamdani's implication rule is used to map the degree of membership of sub damage categories to the degree of membership of damage categories.

Before implementing implication procedure, the degree of membership of damage categories resulted by each IF-THEN rule have to be determined. For this purpose a AND (MIN) operator is used. Let $\mu_{w_q}^{Rule r}(H^k)$ be the degree of membership of damage category k in linguistic variable w_q resulted by rule r and is calculated by using Equation (14). It is assumed that each rule has the same weight. After $\mu_{w_q}^{Rule r}(H^k)$ is obtained then the Mamdani's implication rule is implemented by using Equation (15).

$$\mu_{w_q}^{Rule r}(H^k) = \min \left\{ \mu_{v_p}(NH_1^k), \mu_{v_p}(NH_2^k), \dots, \mu_{v_p}(NH_j^k) \right\} \quad (14)$$

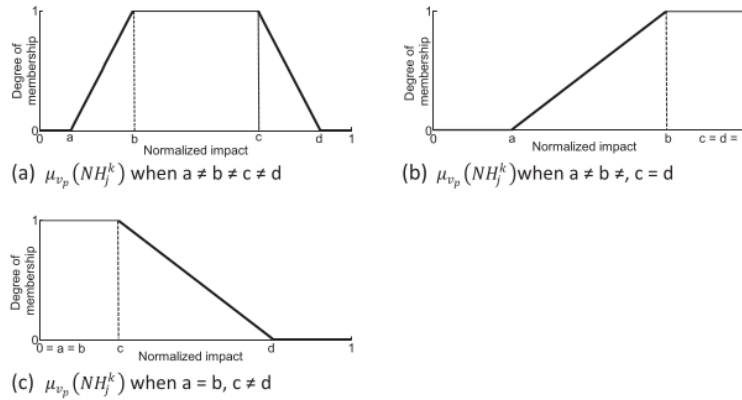


Fig. 3. Sub damage category membership function.

$$\phi_{\text{Rule } r}(H^k) = \min\{\mu_{w_q}^{\text{Rule } r}(H^k), \mu_{w_q}(H^k)\} \quad (15)$$

Below in an example of how rule implication is done.

Given that $\mu_{\text{bad}}(\text{NH}_{\text{Fossil fuels}}^{\text{Resources}}) = 0.5$ and $\mu_{\text{bad}}(\text{NH}_{\text{Minerals}}^{\text{Resources}}) = 0.2$. By using rule 1 and Equation (14), $\mu_{\text{Very low}}^{\text{Rule 1}}(H^{\text{Resources}}) = \min\{0.5, 0.2\} = 0.2$. Insert this result to Equation (15), $\phi_{\text{Rule 1}}(H^{\text{Resources}}) = \min\{0.2, \mu_{\text{Very low}}(H^{\text{Resources}})\}$. $\phi_{\text{Rule 1}}(H^{\text{Resources}})$ is a new fuzzy set shown by Fig. 5.

2.2.5. Aggregation

Aggregation is the process combining outputs of rule implication coming from each fuzzy rule to a fuzzy set. In aggregation process, fuzzy sets of damage categories produced by each applicable rule are aggregated to a new single fuzzy set. OR (MAX) operator is used in this methodology. The resultant of aggregation process for damage category k is denoted as $\mu_{\text{Aggregated}}(H^k)$ and is given by Equation (16). Fig. 6 illustrates how aggregation is done.

$$\mu_{\text{Aggregated}}(H^k) = \max\{\phi_{\text{Rule 1}}(H^k), \dots, \phi_{\text{Rule } R}(H^k)\} \quad (16)$$

2.2.6. Defuzzification

In order to get a single value of damage on each damage category then the aggregated fuzzy set is defuzzied. Defuzzification method used in this methodology is center of gravity and is given by Equation (17). Defuzzification processes is illustrated by Fig. 7.

$$(H^k)^* = \frac{\int_a^b \mu_{\text{Aggregated}}(H^k) H^k dH^k}{\int_a^b \mu_{\text{Aggregated}}(H^k) dH^k} \quad (17)$$

2.2.7. How membership function parameters and fuzzy IF-THEN rule are determined

In order to determine the parameters of the membership functions and the structure of fuzzy IF-THEN rules, the Delphi method is proposed to be used. Detail discussion on the Delphi method can be found in Dalkey (1969), Linstone and Turoff (1975), Riggs (1983), Ishikawa et al. (1993) and Hsu et al. (2010). In this paper, the experts are the stakeholders; their goals and values on sub damage and damage categories are elicited by using the Delphi method, and the numerical truth values of the linguistic variables

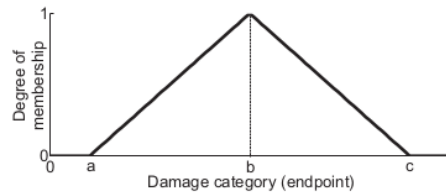


Fig. 4. Triangular membership function of H^k .

are assigned by using the fuzzy inference system. The linguistic variables and the forms of the membership functions for the sub damage categories and damage categories can be predetermined or decided through another Delphi process.

Given that the Delphi method is converged, the following illustrates how responses from the stakeholders are used to find the membership function parameters (Based on Hsu et al., 2010; Bovea and Wang, 2003). Assume that $\text{tra}_{ps} = \{a_{ps}, b_{ps}, c_{ps}, d_{ps}\}$ is the response from the s^{th} stakeholder, $s = 1, 2, \dots, S$, for the linguistic variable v_p of NH_j^k . The parameters for the trapezoidal membership functions of NH_j^k in linguistic variable v_p are given by Equation (18)–(21) and illustrated by Fig. 8.

$$a_p = \min_s \{a_{ps}\} \quad (18)$$

$$b_p = \frac{1}{S} \sum_{s=1}^S b_{ps} \quad (19)$$

$$c_p = \frac{1}{S} \sum_{s=1}^S c_{ps} \quad (20)$$

Table 1
IF-THEN rule structure.

Rule (r)	If NH_1^k is	AND NH_2^k is	...	AND NH_j^k is	THEN H^k is
1	v_1	v_1	...	v_1	w_1
2	v_1	v_1	...	v_2	w_1
...
$R - 1$	v_p	v_p	...	v_{p-1}	w_Q
R	v_p	v_p	...	v_p	w_Q

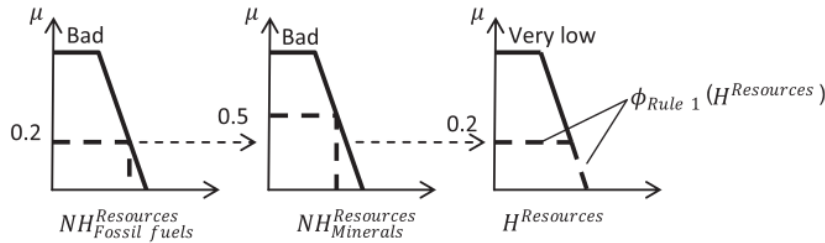


Fig. 5. Example of implication procedure.

$$d_p = \max_s \{d_{ps}\} \quad (21)$$

Similarly, consider that $\text{tri}_{qs} = \{a_{qs}, b_{qs}, c_{qs}\}$ is the response from the s^{th} stakeholder for the linguistic variable w_q of H^k . The parameters for the triangular membership functions of H^k in linguistic variable w_q are given by the following equations and illustrated in Fig. 9.

$$a_q = \min_s \{a_{qs}\} \quad (22)$$

$$b_q = \frac{1}{S} \sum_{s=1}^S b_{qs} \quad (23)$$

$$c_q = \max_s \{c_{qs}\} \quad (24)$$

2.3. Normalize the defuzzification outputs of the fuzzy inference system applied to aggregate sub damage categories to produce index of environmental improvement for damage category

The drawback of using center of gravity defuzzification technique is that the defuzzification outputs may never be equal to zero or one. This situation is illustrated by Fig. 10. As the consequence, $(H^k)^*$ may also never be equal to zero or one although all normalized values of sub damage categories are zero or one. It seems more logical to have $(H^k)^* = 0$ when all normalized inputs are zero and $(H^k)^* = 1$ when all inputs are equal to one. Therefore another normalization process is needed.

Before formulating the equation for the normalized value of damage on each damage category, consider the following notations.

$(H^k)_0^*$ = the defuzzification output of damage category k when all normalized inputs are equal to 0.

$(H^k)_1^*$ = the defuzzification output of damage category k when all normalized inputs are equal to 1.

$(H^k)^*_{\text{Normalized}}$ = the normalized defuzzification output of damage category k , $0 \leq (H^k)^*_{\text{Normalized}} \leq 1$. This is the index of environmental improvement for damage category k .

The idea is that we have to transform $(H^k)^*_{\text{Normalized}}$ to be zero if $(H^k)^* = (H^k)_0^*$, $(H^k)^*_{\text{Normalized}}$ to be one if $(H^k)^* = (H^k)_1^*$, otherwise $(H^k)^*_{\text{Normalized}} \in (0, 1)$. For this purpose, simple interpolation technique is used and the result is given by (25).

$$(H^k)^*_{\text{Normalized}} = \frac{(H^k)^* - (H^k)_0^*}{(H^k)_1^* - (H^k)_0^*} \quad (25)$$

2.4. Aggregate the index of environmental improvement for damage category using the fuzzy inference system

Fuzzy inference system for the normalized damage values follows the same procedure as fuzzy inference system applied for the normalized sub damage categories, but its input variable are the normalized damages on each damage category, $(H^k)^*_{\text{Normalized}}$. Membership functions and linguistic variables are defined for each normalized value of damage category. Through these membership functions, the degree of membership of each normalized damage category in each linguistic variable is obtained. This process produces several numbers. IF-THEN rules are applied along with fuzzy operator to obtain one number for each applicable rule. This single number is then mapped to the fuzzy sets of index of environmental improvement and reshapes its fuzzy sets. This is done for each rule and produces new fuzzy sets. The next process is to aggregate each fuzzy set produced by rule implication and the procedure is similar to the steps followed in fuzzy inference system. For the normalized sub damage category. Finally, center of gravity method is applied to find the center point of the aggregated fuzzy set. This point is denoted as E^* .

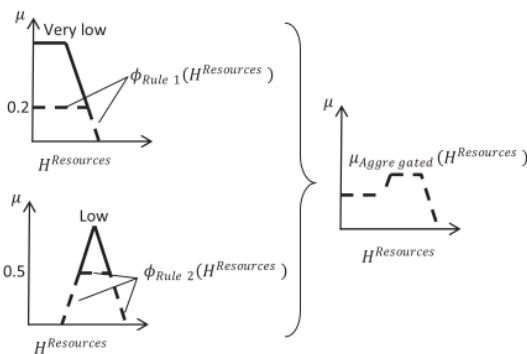


Fig. 6. Example of aggregation procedure.




Fig. 7. Example of defuzzification procedure.

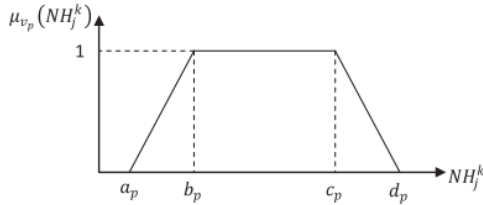


Fig. 8. The determination of trapezoidal membership function parameters.

2.5. Normalize the defuzzification outputs of the fuzzy inference system applied for the index of environmental improvement for damage category to produce the index of total environmental improvement

This normalization process is the consequence of using center of gravity defuzzification technique in fuzzy inference system applied to the normalized damage value. E^* may never be equal to zero although $(H^k)^* = 0, \forall k$, and may also never be equal to one although $(H^k)^* = 1, \forall k$. Therefore another normalization process is needed.

It is defined that E_0^* be the defuzzification output of fuzzy inference system applied for the normalized damage value when $(H^k)^* = 0, \forall k$ and E_1^* be the defuzzification output of fuzzy inference system applied for the normalized damage value when $(H^k)^* = 1, \forall k$. Then the index of total environmental improvement, EI, is given by equation (26).

$$EI = \frac{E^* - E_0^*}{E_1^* - E_0^*} \quad (26)$$

However, normalizing the outputs of defuzzification processes has a drawback. It is seen when EI produced by normalization processes applied to the defuzzification outputs and EI produced without normalization processes applied to the defuzzification outputs are plotted, shown by Fig. 11.

Fig. 11 shows that the normalization processes give higher values of EI when $0.5 < NH_j^k \leq 1$, lower values of EI when $0 \leq NH_j^k < 0.5$. In other words, the use of normalization processes tend to give higher index of total environmental improvement if NH_j^k is greater than 0.5 and produce lower index of total environmental improvement if NH_j^k is less than 0.5.

31

2.6. Sensitivity analysis

The purpose of the sensitivity analysis is to see how the change in the amount of a particular substance (x_{ij}^k) will affect index of total environmental improvement (EI). It is shown that an increase in x_{ij}^k will decrease EI but the magnitude needs to be known. In order to find the magnitude of the effect, the first step is to check whether Equation (9) is continuous or not.

Equation (9) is not a smooth function, as shown by Fig. 2. It has sharp turning points exactly at $(\tilde{H}_j^k, 1)$ and $(\tilde{H}_j^k, 0)$. However, as

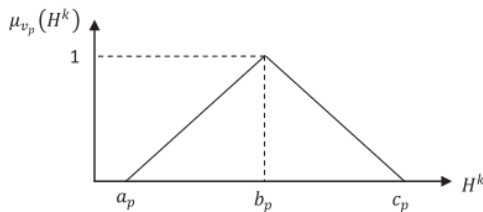


Fig. 9. The determination of triangular membership function parameters.

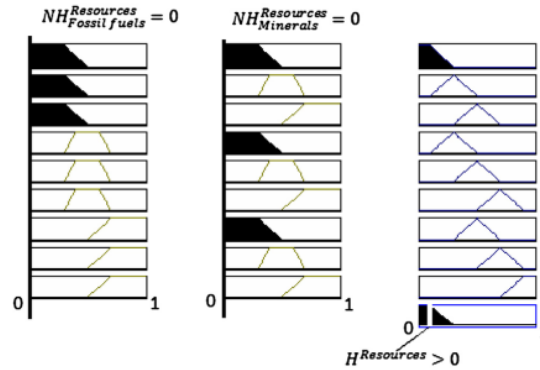


Fig. 10. Defuzzification values when all normalized inputs are zero.

$H_j^k \rightarrow \tilde{H}_j^k$, from both sides (left and right), $NH_j^k(H_j^k) = 1$. Similarly, as $H_j^k \rightarrow \tilde{H}_j^k$, from both sides (left and right), $NH_j^k(H_j^k) = 0$. Therefore $NH_j^k(H_j^k)$ is continuous everywhere. The second step is to check whether Equation (9) is differentiable or not. Limit of difference quotient is applied to check the differentiability of Equation (9) and given by Equation (27)–(30).

$$\lim_{H_j^k \rightarrow \tilde{H}_j^{k+}} \frac{NH_j^k(H_j^k) - NH_j^k(\tilde{H}_j^k)}{H_j^k - \tilde{H}_j^k} = \frac{-1}{\tilde{H}_j^k - \tilde{H}_j^k} \quad (27)$$

$$\lim_{H_j^k \rightarrow \tilde{H}_j^{k-}} \frac{NH_j^k(H_j^k) - NH_j^k(\tilde{H}_j^k)}{H_j^k - \tilde{H}_j^k} = 0 \quad (28)$$

$$\lim_{H_j^k \rightarrow \tilde{H}_j^{k+}} \frac{NH_j^k(H_j^k) - NH_j^k(\tilde{H}_j^k)}{H_j^k - \tilde{H}_j^k} = 0 \quad (29)$$

$$\lim_{H_j^k \rightarrow \tilde{H}_j^{k-}} \frac{NH_j^k(H_j^k) - NH_j^k(\tilde{H}_j^k)}{H_j^k - \tilde{H}_j^k} = \frac{-1}{\tilde{H}_j^k - \tilde{H}_j^k} \quad (30)$$

As the left and right limits are not equal then Equation (9) is not differentiable. However $-1/(\tilde{H}_j^k - \tilde{H}_j^k)$ can still be used to compute

the change on $NH_j^k(H_j^k)$ if x_{ij}^k changes by Δx_{ij}^k . First, by applying the chain rule $\Delta NH_j^k(x_{ij}^k)/\Delta x_{ij}^k = -h_{ij}^k/(\tilde{H}_j^k - \tilde{H}_j^k)$ is obtained and allows

$NH_j^k(x_{ij}^k + \Delta x_{ij}^k)$ to be determined. However, $NH_j^k(x_{ij}^k + \Delta x_{ij}^k)$ have to be forced to be zero if it is less than zero and to be one if it is greater than one. For this purpose, MAX and MIN operators along with $(\tilde{H}_j^k - H_j^k)/(\tilde{H}_j^k - \tilde{H}_j^k)$ are utilized, shown by equation (31).

By inputting $(NH_j^k)_{new}$ to the fuzzy inference process, the influence of $x_{ij}^k + \Delta x_{ij}^k$ to EI will be seen.

$$(NH_j^k)_{new} = \max\left\{ \min\left\{ 1, \frac{\tilde{H}_j^k - H_j^k - \Delta x_{ij}^k h_{ij}^k}{\tilde{H}_j^k - \tilde{H}_j^k} \right\}, 0 \right\} \quad (31)$$

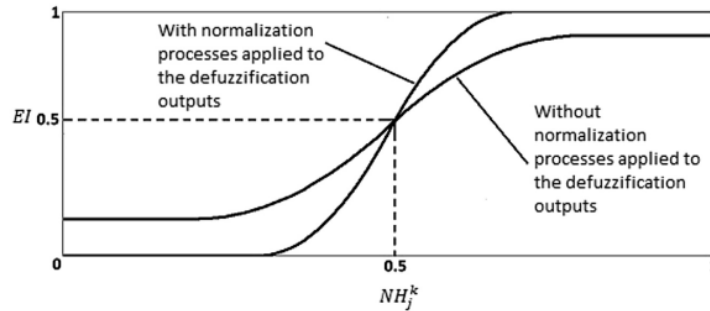


Fig. 11. Comparing the shape of index of total environmental improvement.

3. Results and discussion

In this section, the application and computational procedure of the proposed methodology are illustrated. Each step of the proposed methodology will be explained in detail. At the end of this section, the effect of change in amount of emissions to the index of total environmental improvement will also be explored.

In this case study LCIA of processes producing an engine is assessed. The life cycle stages considered are only material production, manufacturing and transportation from material production facilities to manufacturing facilities). Use phase and end of life treatment are not included due to data limitation.

Method used for LCIA is Eco-Indicator 99 ((E, E) perspective) and the functional unit of this study is to manufacture one engine. Emissions data was obtained from emissions data in 2008 and 2012, where 2008 is considered as base year and 2012 as evaluated year. Sub damage categories and damage categories are defined in Table 2.

3.1. Normalize the damage value of each sub damage category

Values of damage on each sub damage category are calculated by using Equations (6)–(8). The damage factors are obtained from Eco-Indicator 99 ((E, E) perspective). As an example, damage to resources caused by extraction of fossil fuels is calculated, shown by Equation (32)–(34). The damage values are given by Table 3. It is assumed that the percentages of reduction by 2020 for crude oil and natural gas are 30% in material production, 25% in manufacturing and 20% in transportation. For coal, it is assumed that the percentages of reduction by 2020 are 25% in material production, 30% in manufacturing and 20% in transportation.

$$\begin{aligned} \tilde{H}_{\text{Fossil fuels}}^{\text{Resources}} &= 2694.310 + 2037.941 + 5.405 \\ &= 4737.66 \text{ MJ energy surplus.} \end{aligned} \tag{32}$$

Table 2
Sub damage categories and damage categories.

Sub damage category	Damage category
Respiratory effects on humans caused by organic substance	Human health
Respiratory effects on humans caused by inorganic substance	Human health
Human health effects caused by ozone layer depletion	Human health
Human health effects caused by climate change	Human health
Damage on resources caused by extraction of minerals	Resources
Damage on resources caused by extraction of fossil fuels	Resources
Damage on ecosystem quality caused by the combined effect of acidification and eutrophication	Ecosystem quality

$$\begin{aligned} H_{\text{Fossil fuels}}^{\text{Resources}} &= 2519.669 + 2018.002 + 5.185 \\ &= 4542.86 \text{ MJ energy surplus.} \end{aligned} \tag{33}$$

$$\begin{aligned} \tilde{H}_{\text{Fossil fuels}}^{\text{Resources}} &= \left[\begin{aligned} &179.520 \times \left(1 - 0.30 \times \frac{2012-2008}{2020-2008}\right) + \\ &19.788 \times \left(1 - 0.25 \times \frac{2012-2008}{2020-2008}\right) + \dots \\ &0.046 \times \left(1 - 0.20 \times \frac{2012-2008}{2020-2008}\right) \end{aligned} \right] \\ &= 4298.02 \text{ MJ energy surplus} \end{aligned} \tag{34}$$

Substituting values resulted by Equations (32)–(34) to Equation (9) yields the normalized damage value for fossil fuels sub damage category, shown by Equation (35).

$$NH_{\text{Fossil fuels}}^{\text{Resources}} = \max \left\{ \min \left\{ 1, \frac{4737.66 - 4542.86}{4737.66 - 4298.02} \right\}, 0 \right\} = 0.443 \tag{35}$$

Values of damage (H_j^k) and target values of damage (\tilde{H}_j^k) for each sub damage category grouped according to product life cycle stage are presented in Fig. 12. Table 4 summarizes the normalized value of damage of each sub damage category. Fig. 12 shows that material transportation from material production facilities to manufacturing facilities has the least environmental damage. In contrary, material production and manufacturing processes have major contribution to the overall damage. Furthermore, Fig. 12 shows that no targets are achieved and it is confirmed by Table 4. In Table 4 all normalized values are in the interval (0, 1) which means that the processes produce less emission in 2012 but this improvement is still low and insufficient to achieve the targets. Having the results like this we can expect that the index of total environmental improvement is going to be low. Next step is to run fuzzy inference system using these normalized damages as the inputs. The following section illustrates the computational procedure and discusses the applicability of the proposed fuzzy inference system in order to produce the index of total environmental improvement.

Table 3
Damage values for resource damage category (MJ energy surplus).

Resources	Life cycle stage					
	Material production		Manufacturing		Transportation	
	Damage in 2012	Damage in 2008	Damage in 2012	Damage in 2008	Damage in 2012	Damage in 2008
Crude oil	174.198	179.520	18.659	19.788	2.956	2.951
Coal	2320.988	2488.800	1974.516	1991.040	2.185	2.407
Natural gas	24.483	25.990	24.827	27.113	0.043	0.046
Total	2519.669	2694.310	2018.002	2037.941	5.185	5.405

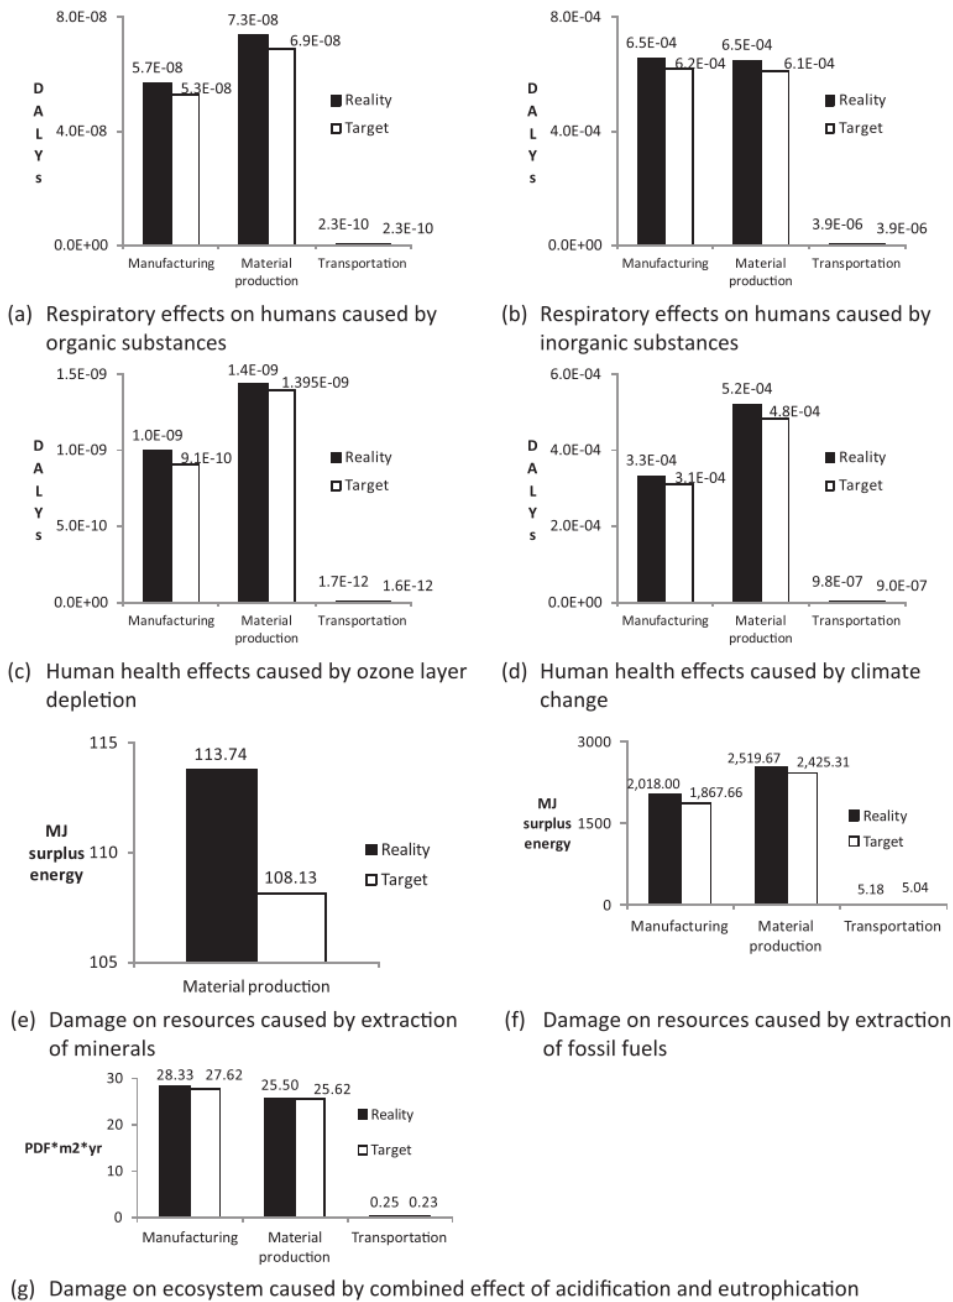


Fig. 12. Damage value on each sub damage category.

3.2. Aggregate the sub damage categories to their damage category using the fuzzy inference system and normalize the defuzzification outputs

In order to run fuzzy inference system, sub damage categories are defined as input variables and damage categories as output variables. The membership functions of sub damage categories and

damage categories are shown by Fig. 13. The parameters of these membership functions are adopted from Andriantiatsaholiniaina et al. (2004). Fig. 13(a) shows that each sub damage category has three membership functions with “bad”, “good” and “very good” linguistic variables.

Fig. 13(b) shows that the damage categories have five membership functions, two trapezoidal membership functions, their

linguistic variables are “very low” and “very high”, and three triangular membership functions, their linguistic variables are “low”, “medium” and “high”. For illustration, damage to resources is used as an example. From Table 4, it is known that $NH_{Fossil\ fuels}^{Resources} = 0.443$ and $NH_{Minerals}^{Resources} = 0.293$. Mapping these values to Fig. 13(a) or by inserting these values to Equations (10)–(12) yields $\mu_{Bad}(0.443) = 0.285$, $\mu_{good}(0.443) = 1$, $\mu_{very\ good}(0.443) = 0$, $\mu_{Bad}(0.293) = 1$ and $\mu_{Good}(0.293) = \mu_{Very\ good}(0.293) = 0$.

Note that, for resources, two sub damage categories (extraction of fossil fuels and minerals) have to be mapped to three linguistic variables (“bad”, “good” and “very good”). Therefore, $3^2 = 9$ rules are used to map these sub damage categories to their damage category (resources). Applying these rules together with equation (14) produces the degree of membership of resources on each linguistic variable of the output (“very low”, “low”, “medium”, “high” and “very high”). The IF-THEN rules are shown by Table 5.

The next step is to apply Mamdani’s rule implication procedure. As shown by Table 5, only rule 1 and 4 that produce non-zero outputs. Therefore, implication outputs are determined by these two rules. By using Equation (15) the following results are obtained.

$$\phi_{Rule1}(H^{Resources}) = \min\{\mu_{Very\ low}^{Rule1}(H^{Resources}), \mu_{Very\ low}(H^{Resources})\} = \min\{0.285, \mu_{Very\ low}(H^{Resources})\}. \quad (36)$$

$$\begin{aligned} \phi_{Rule4}(H^{Resources}) &= \min\{\mu_{Good}^{Rule4}(H^{Resources}), \mu_{Low}(H^{Resources})\} \\ &= \min\{1, \mu_{Low}(H^{Resources})\}. \end{aligned} \quad (37)$$

The fuzzy sets of $\phi_{Rule1}(H^{Resources})$ and $\phi_{Rule4}(H^{Resources})$ are presented in Fig. 14. After completing rule implication steps, aggregation can be done by using equation (16). Equation (38) shows the resultant of damages on resources. Graphically the resultant is presented in Fig. 15.

$$\mu_{Aggregated}(H^{Resources}) = \max\{\phi_{Rule1}(H^{Resources}), \phi_{Rule4}(H^{Resources})\} \quad (38)$$

The next process is to apply Equation (17) to obtain $(H^{Resources})^*$ and is given by the following.

$$(H^{Resources})^* = \frac{\left(\int_0^{0.157} 0.285 H^{Resources} dH^{Resources} + \int_{0.157}^{0.3} \frac{H^{Resources} - 0.1}{0.3 - 0.1} H^{Resources} dH^{Resources} + \int_{0.3}^{0.5} \frac{0.5 - H^{Resources}}{0.5 - 0.3} H^{Resources} dH^{Resources} \right)}{\left(\int_0^{0.157} 0.285 dH^{Resources} + \int_{0.157}^{0.3} \frac{H^{Resources} - 0.1}{0.3 - 0.1} dH^{Resources} + \int_{0.3}^{0.5} \frac{0.5 - H^{Resources}}{0.5 - 0.3} dH^{Resources} \right)} = 0.263 \quad (39)$$

By inserting the value produced by equation (39) to equation (25), the normalized defuzzification output for damage to resources is obtained, as shown by the following.

$$(H^{Resources})_{Normalized}^* = \frac{0.263 - 0.106}{0.894 - 0.106} = 0.199 \quad (40)$$

where $(H^{Resources})_0^* = 0.106$, $(H^{Resources})_1^* = 0.894$.

The same procedure is repeated for other damage categories.

3.3. Aggregate the index of environmental improvement for damage category using the fuzzy inference system and normalize the defuzzification outputs

Fuzzy inference system for the normalized damage value follows the same step as fuzzy inference system applied for the normalized damage value but the input variables are $(H^{Human\ health})_{Normalized}$, $(H^{Resources})_{Normalized}$ and $(H^{Ecosystem\ quality})_{Normalized}$. Defuzzification outputs of fuzzy inference system applied to the normalized damage value are then normalized by using Equation (26). The result is the index of total

environmental improvement (EI). Table 6 summarizes index of environmental improvement for sub damage category, index of environmental improvement for each damage category and index of total environmental improvement.

3.4. Sensitivity analysis

Sensitivity analysis is done in two steps. Step 1, the change in NH_j^k is calculated if emission of substance x_j^k changes by Δx_j^k . This is

done by using Equation (31). Step 2, the new value of NH_j^k is inputted to the fuzzy inference system. A MATLAB SIMULINK

Table 4
Normalized sub damage category.

Sub damage category	Normalized damage
Respiratory effects on humans caused by organic substance	0.240
Respiratory effects on humans caused by inorganic substance	0.386
Human health effects caused by ozone layer depletion	0.355
Human health effects caused by climate change	0.183
Damage on resources caused by extraction of minerals	0.293
Damage on resources caused by extraction of fossil fuels	0.443
Damage on ecosystem quality caused by the combined effect of acidification and eutrophication	0.887

simulation model was developed to conduct the sensitivity analysis.

Here, the sensitivity analysis is illustrated by assuming an increase in total consumption of coal by 50 kg while other emissions/consumptions are kept unchanged. The result is the following.

$$\Delta_{\text{Coal; Fossil fuels}}^{\text{Resources}} = 50 \text{ kg} \quad (41)$$

$$\left(\text{NH}_{\text{Fossil fuels}}^{\text{Resources}} \right)_{\text{new}} = \max \left\{ \min \left\{ 1, \frac{4737.66 - 4542.86 - 50 \times 2.04}{4737.66 - 4298.02} \right\}, 0 \right\} = 0.211 \quad (42)$$

Inputting this new value to the fuzzy inference system yields new EI = 0.2464. Fig. 16 shows how the index of total environmental improvement change if each normalized sub damage category is varied according to a linear function. Note that, when a particular normalized sub damage category is varied the others are kept unchanged. Fig. 16 also illustrates how improvement should be made. The horizontal line of the curves in Fig. 16 infers that although a reduction in emissions results, it still will not change the index of total environmental improvement. In other words, the actual values of damage are decreased, but these improvements are insufficient to increase the index of total environmental improvement. Improvement on index of total environmental improvement will be gained when emissions are decreased along the curves that have a positive slope. Other valuable information that can be obtained includes the maximum and minimum values of index of total environmental improvement that can be achieved from varying a particular sub damage category. This information is given by the range of the

Table 5
IF-THEN rules for damage category resources and its rule implication outputs.

Rule	IF $\text{NH}_{\text{Fossil fuels}}^{\text{Resources}}$ is	AND $\text{NH}_{\text{Minerals}}^{\text{Resources}}$ is	THEN $H^{\text{Resources}}$ is
1	Bad (0.285)	Bad (1)	Very Low ($\min(0.285, 1) = 0.285$)
2	Bad (0.285)	Good (0)	Low ($\min(0.285, 0) = 0$)
3	Bad (0.18)	Very Good (0)	Medium ($\min(0.285, 0) = 0$)
4	Good (1)	Bad (1)	Low ($\min(1, 1) = 1$)
5	Good (1)	Good (0)	Medium ($\min(1, 0) = 0$)
6	Good (1)	Very Good (0)	High ($\min(1, 0) = 0$)
7	Very Good (0)	Bad (1)	Medium ($\min(0, 1) = 0$)
8	Very Good (0)	Good (0)	High ($\min(0, 0) = 0$)
9	Very Good (0)	Very Good (0)	Very High ($\min(0, 0) = 0$)

curve. As an example, according to Fig. 16(f), the decrease in fossil fuels consumption will have a significant effect on index of total environmental improvement. The maximum value of improvement that can be obtained from decreasing fossil fuels consumption is 0.25. This improvement will be achieved when the domain of the normalized value of damage is around 0.35–0.7. Otherwise, no improvement is made. When all the normalized damage are changed simultaneously then the index of total environmental improvement is given by Fig. 17 confirming Fig. 11.

4. Conclusions

The main contribution of this research to cleaner production is that it provides a solution for the drawbacks found in distance to target and panel approach, which have been used in 30 normalization and weighting processes. As it is known, the distance to target method fails in reflecting the relative significance among damage categories. The panel approach has uncertainties in its reference value because of lack of data. Furthermore, the weighting factors used in the panel approach, found in Eco-Indicator 99 and Impact 2002+, may not fit values and goals of the stakeholders of a particular LCA study. In order to overcome this problem the proposed method uses target on emission reduction to normalize the damage values. The normalized damage values are then utilized as the input for the weighting process. This is done by eliciting values and goals of the stakeholders on each damage category by using fuzzy interference system. Fuzzy set operations are then applied to aggregate the damage values and produce the index of total environmental improvement. The proposed methodology simplifies the LCA

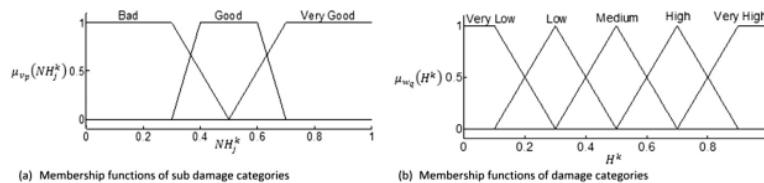


Fig. 13. Membership functions.

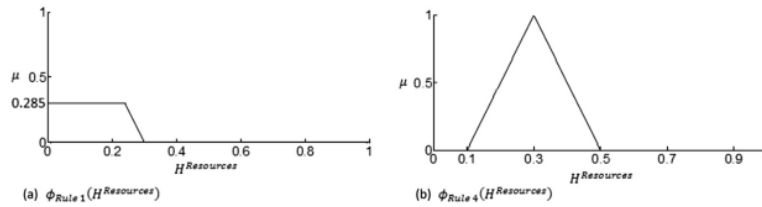


Fig. 14. Mamdani's rule implication outputs for damage to resources.

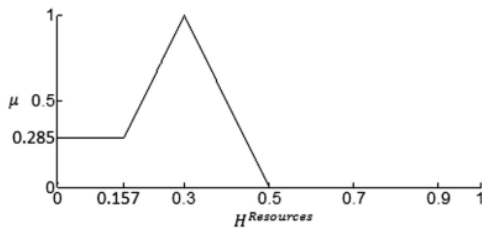


Fig. 15. Aggregation result, $\mu_{\text{Aggregated}}(H^{\text{Resources}})$.

normalization and weighting process and is expected to aid practitioners in evaluating environmental performance of their products.

The critical part of the proposed methodology is the determination of membership function parameters and the structure of IF-THEN rules. Triangular and trapezoidal functions are utilized in this method. In the case study, their parameters are taken from literature. In practice, membership function parameters and the form of IF-THEN rules have to be determined based on expert knowledge or values and goals of the stakeholders. A guideline to model expert knowledge and values and goals of the stakeholders as fuzzy membership function is provided. Furthermore, IF-THEN rules can also be weighted based on the expert knowledge or the values and goals of the stakeholders.

Since the proposed method focuses on the environmental improvement achieved by the product then it has several implications. Firstly, the proposed normalization technique is applicable when the goal of the stakeholders of the LCA study is to see how the environmental performance of a product improves according to a particular target. Secondly, the same value of index of total environmental improvement may have

different absolute value of damage reduction. As an example, consider $\tilde{H}_j^k = 100$, $\tilde{H}_j^k = 87.5$ and $H_j^k = 90$ for product A. $\tilde{H}_j^k = 1000$, $\tilde{H}_j^k = 875$ and $H_j^k = 900$ for product B. $BY = 2010$, $TY = 2020$, $EY = 2015$ and $\alpha_{ij}^k = 0.25$ for both products. Applying Equation (9) results $NH_j^k = 0.8$ for both products. Note that the absolute reduction of damage caused by product A is $100 - 90 = 10$ and the absolute reduction of damage of product B is $1000 - 900 = 100$, but they have the same normalized value of damage, 0.8. This happens because the normalized value of damage is a relative index. Thirdly, it is strongly suggested to present both, the damage values and the indexes of total environmental improvement. This suggestion is made in order to avoid undermining the objectivity and benchmarkability of the LCA results. This is also supported by the results of the sensitivity analysis. As it is shown by the sensitivity analysis, even though a particular emission decreases, the index of total environmental improvement may not change. This is caused by MIN and MAX operator used in fuzzy inference system.


It is also important to note that the way the proposed index is interpreted is different from the way the existing indexes are interpreted. In the existing approaches, such as "point" used in Eco-Indicator 99, higher index means more damage (the lower the better). In the proposed method, a higher improvement index means environmental performance is increasing (the higher the better).

Furthermore, since the Delphi Method is used to define fuzzy membership function parameters and the fuzzy IF-THEN rules then the proposed methodology is only suitable for specific cases because there is no guarantee that the results of the Delphi Method can be applied for generic application (Finnveden, 1999). Therefore, the developed methodology is only applicable for internal product improvement applications.


Table 6

Index of environmental improvement for sub damage category, index of environmental improvement for each damage category and index of total environmental improvement.


Index of environmental improvement for sub damage category (NH_j^k)	Index of environmental improvement for damage category ($(H^k)_{\text{Normalized}}$)	Index of total environmental improvement (EI)
Respiratory effects on humans caused by organic substance = 0.240	Human health = 0.127	Index of total environmental improvement = 0.3715
Respiratory effects on humans caused by inorganic substance = 0.386		
Human health effects caused by ozone layer depletion = 0.355		
Human health effects caused by climate change = 0.183	Resources = 0.199	
Damage on resources caused by extraction of minerals = 0.293		
Damage on resources caused by extraction of fossil fuels = 0.443		
Damage on ecosystem quality caused by the combined effect of acidification and eutrophication = 0.887	Ecosystem quality = 0.887	




(a) Change in index of total environmental improvement when respiratory effects on humans caused by organic substance is varied according to $NH_{Respiratory_organic}^{Human\ health} = 0.1t, t \in [0,10]$




(b) Change in index of total environmental improvement when respiratory effects on humans caused by inorganic substance is varied according to $NH_{Respiratory_inorganic}^{Human\ health} = 0.1t, t \in [0,10]$




(c) Change in index of total environmental improvement when human health effects caused by ozone layer depletion is varied according to $NH_{Ozone}^{Human\ health} = 0.1t, t \in [0,10]$




(d) Change in index of total environmental improvement when human health effects caused by climate change is varied according to $NH_{Climate\ change}^{Human\ health} = 0.1t, t \in [0,10]$



(e) Change in index of total environmental improvement when mineral extraction is varied according to $NH_{Minerals}^{Resources} = 0.1t, t \in [0,10]$



(f) Change in index of total environmental improvement when fossil fuels extraction is varied according to $NH_{Fossil\ fuels}^{Resources} = 0.1t, t \in [0,10]$



(g) Change in index of total environmental improvement when combined effect of acidification and eutrophication is varied according to $NH_{Acidification\ and\ eutrophication}^{Ecosystem} = 0.1t, t \in [0,10]$

Fig. 16. Change in index of total environmental improvement when the normalized value of damage on each sub damage category is varied.

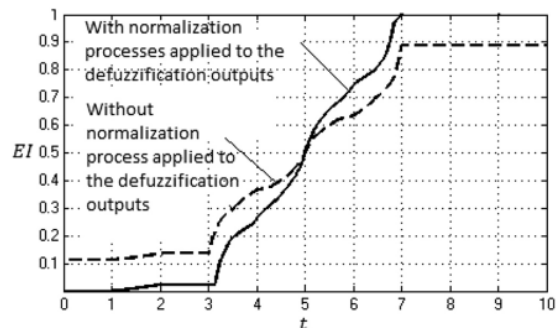


Fig. 17. The behavior of index of total environmental improvement when the normalized values of damage on each sub damage category are varied simultaneously.

References

- Andriantiatsaholainaina, L.A., Kouikoglou, V.S., Phillis, Y.A., 2004. Evaluating strategies for sustainable development: fuzzy logic reasoning and sensitivity analysis. *Ecol. Econ.* 48, 149–172.
- Benetto, E., Dujet, C., Rousseaux, P., 2006. Fuzzy-sets approach to noise impact assessment. *Int. J. LCA* 11 (4), 222–228.
- Bovea, M.D., Wang, B., 2003. Identifying improvement options by combining life cycle assessment and fuzzy set theory. *Int. J. Prod. Res.* 41, 593–609.
- Dalkey, N., 1969. An experimental study of group opinion: the Delphi method. *Futures* 1, 408–426.
- EPA-U.S., 2006. Environmental Protection Agency, Life Cycle Assessment: Principle and Practice. National Risk Management Research Laboratory Office of Research and Development and U.S. Environmental Protection Agency, Cincinnati, OH, USA.
- Finnveden, G., 1999. A Critical Review of Operational Valuation/weighting Methods for Life Cycle Assessment: Survey. Swedish Environmental Protection Agency, Stockholm.
- Goedkoop, M., Spriensma, R., 2000. The Eco-indicator 99: A Damage Oriented Method for Life Cycle Impact Assessment (Methodology Report). Pre Consultant b.v., Amersfoort, The Netherlands.
- González, B., Adenso-Díaz, B., González-Torre, P.L., 2002. A fuzzy approach for the impact assessment in LCA. *Resour. Conserv. Recycl.* 37, 61–79.
- Giureca, L.P., Agell, N., Gasso, S., Baldasano, J.M., 2007. Fuzzy approach to life cycle impact assessment. *Int. J. LCA* 12 (7), 488–496.
- Guinée, J.B., Gorrié, M., Heijungs, R., Huppes, G., Kleijn, R., Koning, A., de Oers, van, L., Sleswijk, A.W., Suh, S., Udo de Haes, H.A., Brujin de, H., Duin van, R., Huijbregts, M.A.J., 2002. Handbook on Life Cycle Assessment. Operational Guide to the ISO Standards. Kluwer Academic Publishers, Dordrecht.
- Hertwich, E.G., Pease, W.S., 1998. ISO 14042 restricts use and development of impact assessment. *Int. J. LCA* 3 (4), 180–181.
- Hsu, Y.-L., Lee, C.-H., Kreng, V.B., 2010. The application of fuzzy Delphi method and fuzzy AHP in lubricant regenerative technology selection. *Expert Syst. Appl.* 37, 419–425.
- Ishikawa, A., Amagasa, M., Shiga, T., Tatsuta, R., Mieno, H., 1993. The Max-Min Delphi method and fuzzy Delphi method via fuzzy integration. *Fuzzy Sets Syst.* 55, 241–253.
- ISO, 2006. ISO 14044: 2006 Environmental Management – Life Cycle Assessment – Requirements and Guidelines. International Organization of Standardization, Switzerland.
- Jolliet, O., Margni, M., Charles, R., Humbert, S., Payet, J., Rebitzer, G., Rosenbaum, R., 2003. IMPACT 2002+: a new life cycle impact assessment methodology. *Int. J. LCA* 8 (6), 324–330.
- Lee, K.M., 1999. A weighting method for the Korean Eco-Indicator. *Int. J. LCA* 4 (3), 161–165.
- Linstone, H.A., Turoff, M., 1975. The Delphi Method: Techniques and Applications. Addison-Wesley Publishing Company, Inc., MA, USA.
- Liu, K.F.-R., Ko, C.-Y., Fan, C., Chen, C.-W., 2012. Combining risk assessment, life cycle assessment, and multi-criteria decision analysis to estimate environmental aspects in environmental management system. *Int. J. LCA* 17, 845–862.
- Mathworks, 2013. Fuzzy logic Toolbox Documentation – Mathworks. Retrieved from: <http://www.mathworks.com/help/fuzzy/functionlist.html>. on February 12, 2013.
- Riggs, W.E., 1983. The Delphi technique: an experimental evaluation. *Technol. Forecast. Soc. Change* 23, 89–94.
- Seppälä, J., 2007. On the meaning of fuzzy approach and normalization in life cycle impact assessment. *Int. J. LCA* 12 (7), 464–469.
- Seppälä, J., Hämäläinen, R.P., 2001. On the meaning of the distance-to-target weighting method and normalization in life cycle impact assessment. *Int. J. LCA* 6 (4), 211–218.
- Sivanandam, S.N., Sumathi, S., Deeba, S.N., 2007. Introduction to Fuzzy Logic Using MATLAB. Springer-Verlag, Heidelberg, Germany.
- Weckenmann, A., Schwan, A., 2001. Environmental life cycle assessment with fuzzy-sets. *Int. J. LCA* 6 (1), 13–18.
- Zadeh, L.A., 1965. Fuzzy sets. *Inform. Control* 8, 338–353.

JCLP-Fuzzy Logic

ORIGINALITY REPORT

7%

SIMILARITY INDEX

4%

INTERNET SOURCES

6%

PUBLICATIONS

0%

STUDENT PAPERS

PRIMARY SOURCES

- 1** Basson, L.. "An integrated approach for the consideration of uncertainty in decision making supported by Life Cycle Assessment", *Environmental Modelling and Software*, 200702
Publication <1%
- 2** cer.sagepub.com
Internet Source <1%
- 3** Dipak Kumar Jana, Oscar Castillo, Sutapa Pramanik, Manoranjan Maiti. "Application of Interval Type-2 Fuzzy Logic to polypropylene business policy in a petrochemical plant in India", *Journal of the Saudi Society of Agricultural Sciences*, 2018
Publication <1%
- 4** mafiadoc.com
Internet Source <1%
- 5** www.oru.se
Internet Source <1%
- 6** lutpub.lut.fi
Internet Source <1%

7	Gonzalez, B.. "A fuzzy logic approach for the impact assessment in LCA", Resources, Conservation & Recycling, 200212 Publication	<1%
8	fr.scribd.com Internet Source	<1%
9	Nabihah Ahmad, Rezaul Hasan. "A new design of XOR-XNOR gates for low power application", 2011 International Conference on Electronic Devices, Systems and Applications (ICEDSA), 2011 Publication	<1%
10	Studies in Fuzziness and Soft Computing, 2016. Publication	<1%
11	Re-engineering Manufacturing for Sustainability, 2013. Publication	<1%
12	Eco-Efficiency in Industry and Science, 2002. Publication	<1%
13	Kun M. Lee. "A weighting method for the korean ECO-indicator", The International Journal of Life Cycle Assessment, 1999 Publication	<1%
14	Kun-Mo Lee, Seungho Yu, Yo-Han Choi, Myunjoo Lee. "Environmental assessment of sewage effluent disinfection system: electron	<1%

beam, ultraviolet, and ozone using life cycle assessment", The International Journal of Life Cycle Assessment, 2012

Publication

15

International Journal of Productivity and Performance Management, Volume 62, Issue 7 (2013-09-07)

Publication

<1%

16

mobile.repository.ubn.ru.nl

Internet Source

<1%

17

university.ahfa.us

Internet Source

<1%

18

www.kurczaczek.waw.pl

Internet Source

<1%

19

Adrian Pirraglia, Daniel E. Saloni. "Measuring environmental improvements image in companies implementing green manufacturing, by means of a fuzzy logic model for decision-making purposes", The International Journal of Advanced Manufacturing Technology, 2011

Publication

<1%

20

Basanth Kommadath. "A fuzzy logic based approach to assess sustainable development of the mining and minerals sector", Sustainable Development, 2011

Publication

<1%

21	spectrum.library.concordia.ca Internet Source	<1%
22	researchonline.ljmu.ac.uk Internet Source	<1%
23	Bovea, M.D.. "Alternative scenarios to meet the demands of sustainable waste management", <i>Journal of Environmental Management</i> , 200604 Publication	<1%
24	focus.jrc.ec.europa.eu Internet Source	<1%
25	<i>Journal of Manufacturing Technology Management</i> , Volume 15, Issue 8 (2006-09-19) Publication	<1%
26	"Supply Chain Management Under Fuzziness", Springer Science and Business Media LLC, 2014 Publication	<1%
27	www.esu-services.ch Internet Source	<1%
28	Hwang, S.L.. "A real-time warning model for teamwork performance and system safety in nuclear power plants", <i>Safety Science</i> , 200903 Publication	<1%
29	hdl.handle.net Internet Source	<1%

30	JAESUNG NOH, KUN MO LEE. "Application of Multiattribute Decision-Making Methods for the Determination of Relative Significance Factor of Impact Categories", Environmental Management, 2003 Publication	<1%
31	www.enpromer2005.eq.ufrj.br Internet Source	<1%
32	ccceh.org Internet Source	<1%
33	Brentrup, F.. "Application of the Life Cycle Assessment methodology to agricultural production: an example of sugar beet production with different forms of nitrogen fertilisers", European Journal of Agronomy, 200105 Publication	<1%
34	www.psi.org.uk Internet Source	<1%
35	ascelibrary.org Internet Source	<1%
36	Seongwon Seo, Toshiya Aramaki, Yongwoo Hwang, Keisuke Hanaki. "Evaluation of Solid Waste Management System Using Fuzzy Composition", Journal of Environmental Engineering, 2003 Publication	<1%

37

Kabir, Golam, and Razia Sultana Sumi.
"Integrating fuzzy Delphi with graph theory and matrix methods for evaluation of hazardous industrial waste transportation firm",
International Journal of Logistics Economics and Globalisation, 2012.

Publication

<1%

38

Glocalized Solutions for Sustainability in Manufacturing, 2011.

Publication

<1%

39

link.springer.com

Internet Source

<1%

40

Zhichao Liu, Feri Afrinaldi, Hong-Chao Zhang, Qihong Jiang. "Exploring optimal timing for remanufacturing based on replacement theory",
CIRP Annals, 2016

Publication

<1%

41

Seongwon Seo, Toshiya Aramaki, Yongwoo Hwang, Keisuke Hanaki. "Environmental Impact of Solid Waste Treatment Methods in Korea",
Journal of Environmental Engineering, 2004

Publication

<1%

42

Tanja Myllyviita, Pekka Leskinen, Jyri Seppälä. "Impact of normalisation, elicitation technique and background information on panel weighting results in life cycle assessment",
The International Journal of Life Cycle Assessment,

<1%

2013

Publication

43

Amir Tarighat. "Chapter 14 Fuzzy Inference System as a Tool for Management of Concrete Bridges", IntechOpen, 2012

Publication

<1%

44

Jyri Seppälä. "On the meaning of the distance-to-target weighting method and normalisation in Life Cycle Impact assessment", The International Journal of Life Cycle Assessment, 07/2001

Publication

<1%

Exclude quotes On

Exclude matches Off

Exclude bibliography On

Date: Dec 06, 2013
To: "Feri Afrinaldi" ferि.afrinaldi@ttu.edu
From: David Meyer meyer.david@epa.gov
Subject: Your Submission

Ms. Ref. No.: JCLEPRO-D-13-00551R2
Title: A Fuzzy Logic Based Aggregation Method for Life Cycle Impact Assessment
Journal of Cleaner Production

Dear Mr. Feri Afrinaldi,

It is my pleasure to inform you that your article "A Fuzzy Logic Based Aggregation Method for Life Cycle Impact Assessment" has been accepted for publication in Journal of Cleaner Production. Thank you for considering our publication.

When your paper is published on ScienceDirect, you want to make sure it gets the attention it deserves. To help you get your message across, Elsevier has developed a new, free service called AudioSlides: brief, webcast-style presentations that are shown (publicly available) next to your published article. This format gives you the opportunity to explain your research in your own words and attract interest. You will receive an invitation email to create an AudioSlides presentation shortly. For more information and examples, please visit <http://www.elsevier.com/audioslides>.

With kind regards,

Dr. David Meyer, PhD
Subject Editor
Journal of Cleaner Production

Note: There is a new field added in our journal to update personal classifications and/or personal keywords and we would request to update these details:

To update your details:

1. Click "Change Details" in the menu at the top of the page.
2. Check your address/e-mail details; if you haven't done so already, please add your institute.
3. Go to the "Areas of Interest or Expertise" at the bottom of the page and update your personal classifications and/or personal keywords.
4. Click "Submit" on the main page to save changes

For further assistance, please visit our customer support site at <http://help.elsevier.com/app/answers/list/p/7923>. Here you can search for solutions on a range of topics, find answers to frequently asked questions and learn more about EES via interactive tutorials. You will also find our 24/7 support contact details should you need any further assistance from one of our customer support representatives.

Your Submission

From: Journal of Cleaner Production (dhusing@utk.edu)

To: feri.afrinaldi@ttu.edu; f_afrinaldi@yahoo.com; feri_afrinaldi@ft.unand.ac.id

Date: Saturday, December 7, 2013, 02:51 PM GMT+7

Ms. Ref. No.: JCLEPRO-D-13-00551R2

Title: A Fuzzy Logic Based Aggregation Method for Life Cycle Impact Assessment
Journal of Cleaner Production

Dear Feri,

A final disposition of "Accept" has been registered for the above-mentioned manuscript.

Kind regards,

Administrative Support Agent
Administrative Support Agent [02-Feb-11]
Journal of Cleaner Production

Comments from the Editors and Reviewers:

For further assistance, please visit our customer support site at <http://help.elsevier.com/app/answers/list/p/7923>. Here you can search for solutions on a range of topics, find answers to frequently asked questions and learn more about EES via interactive tutorials. You will also find our 24/7 support contact details should you need any further assistance from one of our customer support representatives.