

# Multiple Ground Terminations of Positive Cloud to Ground Induced by a Same Stepped Leader

Ariadi Hazmi, Primas Emeraldi and Nobuyuki Takagi

**Abstract**—We have investigated 6 of 50 positive cloud to ground (CG) flashes with multiple strikes to ground in the tropical region, West Sumatra, Indonesia. It was found that the arithmetic mean (AM) and geometric mean (GM) leader pulses interval, leader-return stroke interval, and final leader/return stroke ratio are 21.52  $\mu$ s, 1.3 ms, 5.1% and 18.97  $\mu$ s, 1.27 ms, 4.7%, respectively. The interstroke interval varies from 7  $\mu$ s to 13  $\mu$ s with the AM and GM values of 10  $\mu$ s and 7.73  $\mu$ s, respectively. We have also found that the amplitude of the final leader pulses just prior to return stroke tends to decrease compared to that of the middle leader pulses.

**Keywords**—Double peak waveforms, leader pulse, positive cloud to ground, return stroke, tropics.

## I. INTRODUCTION

Although downward stepped leaders have many branches, the main leader branch is usually responded by an upward leader from the ground to induce a return stroke and a strike to ground termination. Recently, several researchers have reported that a same stepped leader with many branches is able to produce different ground terminations that are separated by several tens to hundreds meters [1-4]. Guo and Krider [5] have reported that about 2% of return strokes show double peak waveforms with an interstroke interval between two peaks of about 70  $\mu$ s. Takagi et al. [6] found that the occurrence percentage of double peak return stroke waveforms at middle latitude was 1%. Multiple ground terminations occurring within several microseconds are difficult to identify by a lightning location system. In this paper we report about the leader pulse and return stroke characteristics of positive cloud to ground lightning flashes induced by a same stepped leader that produces the double peak return stroke waveforms.

## II. OBSERVATION

The data presented in this study were 6 of 50 positive cloud to ground lightning flashes produced by 22 thunderstorm days

Ariadi Hazmi is with the Department of Electrical Engineering, Andalas University, Padang 25163, Indonesia (ariadi@ft.unand.ac.id).

Primas Emeraldi is with the Dept. of Electrical Engineering, Andalas University, Padang 25163, Indonesia (primas.emerald@gmail.com).

Nobuyuki Takagi is with the Department of Electrical and Electronic Engineering, Gifu University, 1-1 Yanagido, Gifu 501-1193, Japan (takagi-n@gifu-u.ac.jp).

during May to September, 2014. Our measurement station was located on the roof of the four-story Electrical Engineering Building of Engineering Faculty at the Andalas University (-0.98 N and 100.3 E), an altitude of about 311 m above sea level and 13 km away from Padang Beach. Furthermore, a sensor of circular flat plate parallel was installed to record the broadband electric field. The area of the flat plate parallel was 0.07 m<sup>2</sup>. The decay time constant of sensor was 100 ms with integrator capacitance (C) of 1 nF. All waveforms from a circular flat plate parallel were connected to an integrator/amplifier, a 12-bit digitizing oscilloscope with a sampling rate of 80 MS/s, and digital low-pass filter (200 kHz). The total record length was 1 s with a pretrigger time of 400 ms, and sample interval data of 1  $\mu$ s. The window trigger was set  $\pm$  500 mV.

## III. RESULT AND DISCUSSION

In this study, we used the physics sign convention for electric fields and selected 6 of 50 positive CG flashes with multiple ground terminations based on double peak return stroke waveforms from the electric field antenna. The typical electric field waveform of a single return stroke is shown in Fig. 1. A summary of leader pulse characteristics of double peak return stroke waveforms is presented in Table 1. According to Wang and Takagi [7], electric field change produced by a stepped leader leads to the leader pulses being detectable several hundreds meter above the ground by a fast electric field antenna before the return stroke occurs. Table 2 shows a summary of double peak return stroke waveform parameters.

### 3.1. Leader pulses

Generally, the amplitude of leader pulses (L) increases when the leader approaches the ground to induce one return stroke (RS) and strike one ground termination. However, a same stepped leader with many branches may almost simultaneously induce two or more return strokes with different ground terminations. The typical electric field waveforms of larger and smaller leader pulses from two return strokes are shown in Fig. 2 and Fig. 3, respectively. Fig. 3 showed a smaller leader pulse that might be due to a distant lightning.

The leader pulse interval varied from 4  $\mu$ s to 50  $\mu$ s with the arithmetic mean (AM), geometric mean (GM), median, and standard deviation (SD) are 21.53, 18.98, 20.29, and 10  $\mu$ s, respectively. Although other authors did not confirm whether their observation results contained double peak return stroke waveforms or not, they did report that the AM values from

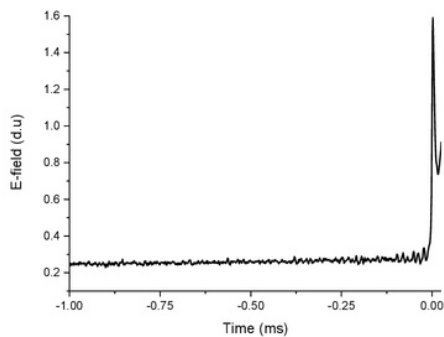


Fig. 1. Typical leader pulse electric field changes of single peak return stroke waveforms.

previous studies conducted by Cooray and Lundquist [8] and Hojo et al. [9] in Sweden and Japan were 26 and 17.4  $\mu\text{s}$ , respectively, while Schumann et al. [10] found that the AM values at different stages varied from 20.2  $\mu\text{s}$  at the final stage to 22.5  $\mu\text{s}$  at the initial stage. Our mean value that contains double peak return stroke waveforms is quite similar to the one from Schumann et al. [10], which they found in Brazil. The distribution of the leader pulse interval is shown in Fig. 4.

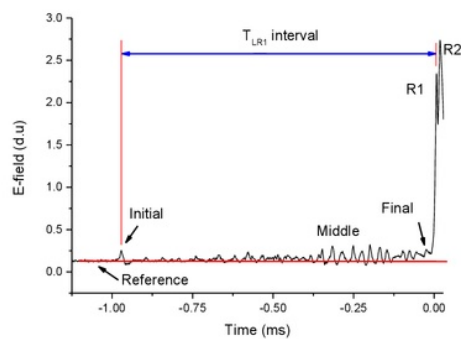


Fig. 2. Typical larger leader pulse electric field changes of double peak return stroke waveform.

Furthermore, the AM and GM time intervals between initial leader and first return stroke were 1.30 and 1.27 ms with a median and range of 1.24 ms, and 0.98-2 ms, respectively. The AM and GM time intervals between final leader and return stroke were 20.19 and 19.50  $\mu\text{s}$ , respectively with time varying from 15  $\mu\text{s}$  to 32.12  $\mu\text{s}$ . The AM ratios of the leader pulse peak to the accompanying return stroke at the initial, middle, and final stages are 3.28, 5.90, and 5.13%, respectively. Schumann et al. [10] reported that the corresponding values at different stages were 2.1, 2.6, and 3.6%, respectively with final leader to return stroke ratio is the highest. Our observations yielded slightly higher than those of Schumann et al. [10] at different stages.

It is interesting to note that the ratio value at the final stages was lower than that at the middle stages. The difference may be caused by a mechanism of the attachment process between single and double ground terminations. We speculate that a

same stepped leader inducing two return strokes gets energy from the cloud [4]. Furthermore, the same energy being divided and used to strike two ground terminations almost simultaneously led to a ratio of the leader to return stroke at the final stages that was lower than at the middle stages. According to Qie et al. [4], the all speeds of the leader branches before the attachment process of the multiple ground terminations in negative CG tend to decrease. Our investigation supports their results. More data are needed to clarify about the leader characteristics on the attachment process of multiple ground terminations induced by a same stepped leader.

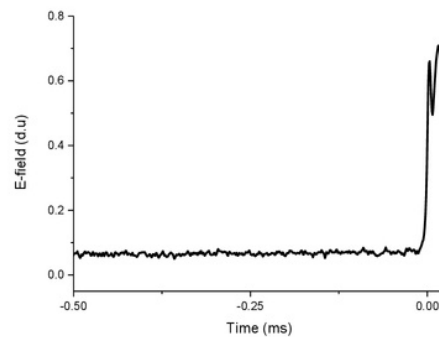


Fig. 3. Typical smaller leader pulse electric field changes of double peak return stroke waveform.

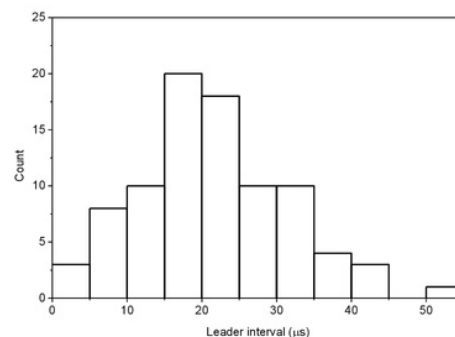


Fig. 4. Histogram of leader pulse interval for double peak return stroke waveforms.

### 3.2. Return stroke

Typical double peak electric field waveforms of two return strokes are shown in Fig. 5. To identify two return strokes with a same stepped leader channel, some parameters were investigated such as interstroke interval, stroke rise time, and ratio between two return stroke amplitudes. From Table 2, the interstroke interval varied from 7  $\mu\text{s}$  to 13  $\mu\text{s}$  with AM and GM value are 10 and 9.7  $\mu\text{s}$ . Qie et al. [4] found that the interstroke interval of four branches in negative CG varied from 4  $\mu\text{s}$  to 10  $\mu\text{s}$  with an AM value of 7.6  $\mu\text{s}$ . The ground termination point was separated with a distance variation of

TABLE 1. SUMMARY OF LEADER PULSE CHARACTERISTICS

| Parameters                              | N  | AM    | SD   | GM    | Range     | Median |
|---|----|-------|------|-------|-----------|--------|
| Leader pulse interval ( $\mu\text{s}$ ) | 87 | 21.53 | 10   | 18.98 | 4-50      | 20.29  |
| L-RS interval (ms)                      | 6  | 1.30  | 0.37 | 1.27  | 0.98-2    | 1.24   |
| Final L-RS interval ( $\mu\text{s}$ )   | 6  | 20.19 | 6.32 | 19.50 | 15-32.12  | 18     |
| Initial L/RS ratio (%)                  | 6  | 3.28  | 1.75 | 2.86  | 1.16-5.49 | 2.91   |
| Middle L/RS ratio (%)                   | 6  | 5.90  | 2.17 | 5.46  | 2.30-8.62 | 6.37   |
| Final L/RS ratio (%)                    | 6  | 5.13  | 1.96 | 4.79  | 2.79-7.50 | 5.45   |

TABLE 2. SUMMARY OF DOUBLE PEAK RETURN STROKE WAVEFORM CHARACTERISTICS

| No | Date       | Local Time | R1/R2 ratio (%) | Interstroke interval ( $\mu\text{s}$ ) | Risetime ( $\mu\text{s}$ ) |            |            |            |
|----|------------|------------|-----------------|--|----------------------------|------------|------------|------------|
|    |            |            |                 |  | 1st 0-100%                 | 1st 10-90% | 2nd 0-100% | 2nd 10-90% |
| 1  | 2014-05-09 | 22:09:51   | 85.19           | 13                                     | 16.04                      | 7.68       | 8          | 4.6        |
| 2  | 2014-05-09 | 22:48:22   | 92.41           | 8                                      | 11.94                      | 4.64       | 4          | 2.74       |
| 3  | 2014-08-12 | 19:12:10   | 84.22           | 10                                     | 14.97                      | 7.93       | 6          | 3.9        |
| 4  | 2014-09-24 | 20:59:43   | 93.21           | 13                                     | 15.98                      | 6.15       | 8          | 5.54       |
| 5  | 2014-09-25 | 04:18:15   | 86.71           | 9                                      | 7.86                       | 3.75       | 5          | 3          |
| 6  | 2014-09-25 | 09:52:48   | 91.29           | 7                                      | 12.98                      | 5.94       | 5          | 3.37       |

about 184-490 m. Furthermore, the AM and GM 0-100% and 10-90% rise times of the first return stroke (R1) were 13.3, 6.02  $\mu\text{s}$  and 12.93, 5.82  $\mu\text{s}$ , respectively. The AM and GM 0-100% and 10-90% rise times of the subsequent return stroke (R2) were 6, 3.86  $\mu\text{s}$  and 5.81, 3.74  $\mu\text{s}$ , respectively. Our observation showed that the rise time of the first return stroke is longer than that of the subsequent return stroke. Qie et al. [11] found in China that the AM 0-100% rise times for the first and subsequent return stroke were 13.96 and 6.6  $\mu\text{s}$ , respectively. Other authors reported that the AM 10-90% rise times of the first return stroke found in Japan [9] and Sweden [12] was 8.7 and 6.2  $\mu\text{s}$ . Compared to other authors, our rise times are similar to Qie et al.'s observations [11], which they found in Da Hingga Ling of China [5] a higher latitude. Our observation results indicate that the rise times of the first and subsequent return stroke for the double peak waveforms are similar to that of the single peak waveforms. Additionally,

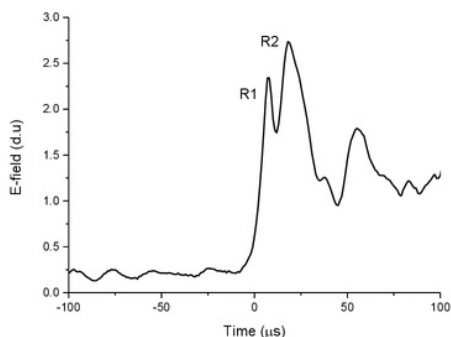


Fig. 5. Typical electric field changes of double peak return stroke waveforms.

ratio of the first return stroke to the subsequent return stroke amplitude varied from 84.22% to 93.21%. Our ratio values showed that the amplitude of first return stroke was lower than that of second return stroke.

#### IV. CONCLUSION

We have investigated 6 of 50 positive CG flashes containing a double peak return stroke waveform. The AM leader pulse interval was 21.53  $\mu\text{s}$  similar to that of Schumann et al. [10] found in Brazil. The AM and GM time intervals between the initial leader and the first return stroke were 1.30 and 1.27 ms respectively. The AM and GM time intervals between the final leader and the first return stroke were 20.19 and 19.50  $\mu\text{s}$ , respectively. The ratio of leader pulse to return stroke amplitude at the final stages was lower than at the middle stages. Additionally, the AM and GM interstroke intervals had a value of 10 and 9.7  $\mu\text{s}$ , respectively. Furthermore, the AM 0-100% and 10-90% rise times of the first return stroke were 13.3 and 6.02  $\mu\text{s}$ , respectively. The AM 0-100% and 10-90% rise times of the subsequent return stroke were 6 and 3.86  $\mu\text{s}$ , respectively. Compared to other authors, the rise times of the first and subsequent return stroke for the double peak waveforms are similar to that of the single peak waveforms. The ratio of the first return stroke to the subsequent return stroke amplitude varied from 84.22% to 93.21%. More data are needed to better understand the leader characteristics during the attachment process of multiple ground terminations induced by a same stepped leader.

#### ACKNOWLEDGMENTS

This work was supported by International Research Collaboration and Scientific Publication (KLN) grant, KEMRISTEKDIKTI, Indonesia, 2015.

REFERENCES

- [1] Rakov, V. A., and M. A. Uman (1994), Origin of lightning electric field signatures showing two return-stroke waveforms separated in time by a millisecond or less, *J. Geophys. Res.*, 99, 8157–8165.
- [2] Willett, J. C., D. M. Levine, and V. P. Idone (1995), Lightning-channel morphology revealed by return-stroke radiation-field wave-forms, *J. Geophys. Res.*, 100, 2727–2738.
- [3] Ballarotti, M. G., M. M. F. Saba, and O. Pinto Jr. (2005), High-speed camera observations of negative ground flashes on a millisecond-scale, *Geophys. Res. Lett.*, 32, L23802, doi:10.1029/2005GL023889.
- [4] Qie, X., and X. Kong (2007), Progression features of a stepped leader process with four grounded leader branches, *Geophys. Res. Lett.*, 34, L06809, doi:10.1029/2006GL028771.
- [5] Guo, C., and E. P. Krider (1982), The optical and radiation field signatures produced by lightning return strokes, *J. Geophys. Res.*, 87, 8913–8922.
- [6] Takagi, N., T. Watanabe, I. Arima, H. Ito, Z.-I. Kawasaki, M. Nakano, T. Takeuti, H. Kinoshita, M. Suzuki, and Y. Saikawa (1991), Lightning flash with multiple strikes to ground (in Japanese), *Trans. IEE Jpn.*, 111 (B), 93-98.
- [7] Wang, D., and N. Takagi (2011), A downward positive leader that radiated optical pulses like a negative stepped leader, *J. Geophys. Res.*, 116, D10205, doi:10.1029/2010JD015391.
- [8] Cooray, V., and S. Lundquist (1982), On characteristics of some radiation fields from lightning and their possible origin in positive ground flashes, *J. Geophys. Res.*, 87(C13), 11,203-11,214.
- [9] Hojo, J., M. Ishii, T. Kawamura, F. Suzuki, and R. Funayama (1985), The fine structure in the field change produced by positive ground strokes, *J. Geophys. Res.*, 90(D4), 6139–6143, doi:10.1029/JD090iD04p06139.
- [10] Schumann, C., M. M. F. Saba, L.Z. S. Campos, R. B. G. Da Sliva, W. Schulz (2011), Leader characteristics in positive cloud to ground lightning flashes, 3rd International Symposium on Winter Lightning (ISWL2011), Japan.
- [11] Qie, X., Z. Wang, D. Wang, M. Liu, and Y. Xuan (2013), Characteristics of positive cloud-to-ground lightning in Da Hinggan Ling forest region at relatively high latitude, northeastern China, *J. Geophys. Res. Atmos.*, 118, 13,393–13,404, doi:10.1002/2013JD020093.
- [12] Cooray, V. (1986), A novel method to identify the radiation fields produced by positive return strokes and their submicrosecond structure, *J. Geophys. Res.*, 91(D7), 7907–7911, doi:10.1029/JD091iD07p07907.

# Multiple Ground Terminations of Positive Cloud to Ground Induced by a Same Stepped Leader

## ORIGINALITY REPORT

18%

SIMILARITY INDEX

11%

INTERNET SOURCES

16%

PUBLICATIONS

0%

STUDENT PAPERS

## PRIMARY SOURCES

- 1** [linknovate.com](http://linknovate.com) 2%  
Internet Source
- 2** H. G. P. Hunt, K. J. Nixon. "A method for determining LDN confidence ellipse information for ground-strike points", 2016 33rd International Conference on Lightning Protection (ICLP), 2016 1%  
Publication
- 3** K Chandrasekaran. "Horizontal component of electric field due to lightning return strokes", 2011 International Conference on Power and Energy Systems, 12/2011 1%  
Publication
- 4** Shoory, Abdolhamid, Farhad Rachidi, Marcos Rubinstein, Rouzbeh Moini, and Seyed H. Hesamedin Sadeghi. "Analytical Expressions for Zero-Crossing Times in Lightning Return-Stroke Engineering Models", IEEE Transactions on Electromagnetic Compatibility, 2009. 1%  
Publication

|                 |   |    |
|-----------------|---|----|
| 5               | A. A. Few. "An Unusual Lightning Flash at Kennedy Space Center", Science, 07/07/1978  | 1% |
| Publication     |   |    |
| 6               | W. Lu. "Characteristics of the optical pulses associated with a downward branched stepped leader", Journal of Geophysical Research, 11/11/2008  | 1% |
| Publication     |   |    |
| 7               | www.rakov.ece.ufl.edu   | 1% |
| Internet Source |   |    |
| 8               | Nag, Amitabh, and Vladimir A. Rakov. "Parameters of Electric Field Waveforms Produced by Positive Lightning Return Strokes", IEEE Transactions on Electromagnetic Compatibility, 2014.          | 1% |
| Publication     |   |    |
| 9               | dspace.cvut.cz  | 1% |
| Internet Source |   |    |
| 10              | Susumu Hara. "Shock vibration control using active momentum exchange impact damper - Experimental study", 2009 IEEE/ASME International Conference on Advanced Intelligent Mechatronics, 07/2009 | 1% |
| Publication     |   |    |
| 11              | An Introduction to Lightning, 2015.   | 1% |
| Publication     |   |    |

12

Hossain, Md. Alamgir, and Md. Raju Ahmed. "Study and protection of lightning overvoltage on DC cables of solar power generation", 8th International Conference on Electrical and Computer Engineering, 2014.

Publication

1%

13

Haddad, Michael A., Vladimir A. Rakov, and Steven A. Cummer. "New measurements of lightning electric fields in Florida: Waveform characteristics, interaction with the ionosphere, and peak current estimates", Journal of Geophysical Research, 2012.

Publication

1%

14

[people.ee.duke.edu](http://people.ee.duke.edu)

Internet Source

1%

15

Junichi Hojo. "The Fine Structure in the Field Change Produced by Positive Ground Strokes", Journal of Geophysical Research, 1985

Publication

&lt;1%

16

Hazmi, Ariadi, Zulka Hendri, Syaifa Mulyadi, Dsrinal Tesal, Daohong Wang, and Nobuyuki Takagi. "Characteristics of electric field change preceding negative first return stroke produced by preliminary breakdown", 2013 International Conference on Information Technology and Electrical Engineering (ICITEE), 2013.

Publication

&lt;1%

17

Li, Qin, Kaicheng Li, and Xiaojing Chen. "Research on lightning electromagnetic fields associated with first and subsequent return strokes based on Laplace wavelet", Journal of Atmospheric and Solar-Terrestrial Physics, 2013.

Publication

<1%

18

d-nb.info  
Internet Source

<1%

19

V. Cooray. "The Fine Structure of Positive Lightning Return-Stroke Radiation Fields", IEEE Transactions on Electromagnetic Compatibility, 2/2004

Publication

<1%

20

Dalina Johari, Vernon Cooray, Mahbubur Rahman, Pasan Hettiarachchi, Mohd Muzafar Ismail. "Features of the first and the subsequent return strokes in positive ground flashes based on electric field measurements", Electric Power Systems Research, 2017

Publication

<1%

21

www.docstoc.com  
Internet Source

<1%

22

Saba, Marcelo M.F., Carina Schumann, Tom A. Warner, John H. Helsdon, and Richard E. Orville. "High-speed video and electric field

<1%



observation of a negative upward leader connecting a downward positive leader in a positive cloud-to-ground flash", Electric Power Systems Research, 2015.

Publication

23

[nzmaths.co.nz](http://nzmaths.co.nz)

Internet Source

<1%

24

Adhikari, Pitri Bhakta, Shriram Sharma, and Kedarnath Baral. "Features of positive ground flashes observed in Kathmandu Nepal", Journal of Atmospheric and Solar-Terrestrial Physics, 2016.

Publication

<1%

25

[diva-portal.org](http://diva-portal.org)

Internet Source

<1%

26

[mdpi.com](http://mdpi.com)

Internet Source

<1%

27

[www.aldis.at](http://www.aldis.at)

Internet Source

<1%

28

Kong, Xiangzhen, Yang Zhao, Huaibin Wang, and Tong Zhang. "Research on natural cloud-to-ground lightning flashes over a chinese inland plateau", 2014 International Conference on Lightning Protection (ICLP), 2014.

Publication

<1%

29

Lecture Notes in Electrical Engineering, 2015.

30

J. C. Willett. "Lightning return stroke current waveforms aloft from measured field change, current, and channel geometry", Journal of Geophysical Research, 04/09/2008

Publication

<1%

31

C. Gomes. "Concepts of lightning return stroke models", IEEE Transactions on Electromagnetic Compatibility, 2000

Publication

<1%

32

Yu Lan. "Broadband analysis of chaotic pulse trains generated by negative cloud-to-ground lightning discharge", Journal of Geophysical Research, 09/14/2011

Publication

<1%

Exclude quotes Off

Exclude matches Off

Exclude bibliography On