

International Journal on Advanced Science Engineering Information Technology

[HOME](#) [ARCHIVES](#)

Vol. 9 (2019) No. 5

Articles

Modified Dynamic Time Warping for Hierarchical Clustering

Mahmoud Sammour, Zulaiha Ali Othman, Amalia Mabrina Masbar Rus, Rosmayati Mohamed
pages: 1481-1487 [Full text](#) DOI:10.18517/ijaseit.9.5.7079

A Comparison of Supervised Learning Techniques for Predicting the Mortality of Patients with Altered State of Consciousness

Muhammad Ariff Yasri, Shamimi A. Halim, Muthukkaruppan Annamalai
pages: 1488-1495 [Full text](#) DOI:10.18517/ijaseit.9.5.7117

Secure e-Health Record System Using Identity-based Encryption with Embedded Key

Dian Neipa Purnamasari, Amang Sudarsono, Prima Kristalina
pages: 1496-1504 [Full text](#) DOI:10.18517/ijaseit.9.5.8278

A Hybrid Water Flow-Like Algorithm and Variable Neighbourhood Search for Traveling Salesman Problem

Mohamed Rafique Othman, Zulaiha Ali Othman, Ayman Ibraheem Srour, Nor Samsiah Sani
pages: 1505-1511 [Full text](#) DOI:10.18517/ijaseit.9.5.7957

The Identification of Car Combustion Engine Category on Exhaust Emissions Data Pattern Base Using Sum Square Error Method

- Andrizal, - Lifwarda, Anton Hidayat, Roza Susanti, Nadia Alfriti, Rivanol Chadry
pages: 1512-1519 [Full text](#) DOI:10.18517/ijaseit.9.5.3928

Implementation of Data Abstraction Layer Using Kafka on SEMAR Platform for Air Quality Monitoring

Yohanes Yohanie Fridelin Panduman, Mochamad Rifki Ulil Albaab, Adnan Rachmat Anom Besari, Sritrusta Sukaridhoto, Anang Tjahjono, Rizqi Putri Nourma Budiarti
pages: 1520-1527 [Full text](#) DOI:10.18517/ijaseit.9.5.8547

Determining Optimal Mining Work Size on the OpenCL Platform for the Ethereum Cryptocurrency

Pavel V. Sukharev, Dmitry S. Silnov, Maxim O. Shishkin
pages: 1528-1534 [Full text](#) DOI:10.18517/ijaseit.9.5.5820

Implementation of Mechanical Technology Competence Learning Model with Maximum Likelihood Estimation

A Muhammad Idkhan, - Djuanda, Iswahyudi Indra Putra
pages: 1535-1543 [Full text](#) DOI:10.18517/ijaseit.9.5.9157

Al6061 Reinforced Al2O3 Metal Matrix Composite Produced by Double Blade Stir Casting

Anne Zulfia, Krista Raga, Wahyuaji Narottama, Salahuddin Yunus
pages: 1544-1549 [Full text](#) DOI:10.18517/ijaseit.9.5.8611

The Effect of Local Crime on Construction Projects in Padang City

Yervi Hesna, Alsidqi Hasan, Nurhamidah Nurhamidah, Atharika Yosa F
pages: 1550-1555 [Full text](#) DOI:10.18517/ijaseit.9.5.4204

IJASEIT

[About](#)

[Editorial Board](#)

[Guide for Authors](#)

[Journal Contact](#)

[Online Submission](#)

[Peer Review Policy](#)

[Publication Ethics](#)

[Browse Authors](#)

[NEW Update : IJASEIT in Scopus](#)

[NEW Update : IJASEIT in Scimago JR](#)

Scimago Journal Rank



Scopus CiteScore

1.31 2017 CiteScore

Powered by Scopus

Yudan Whulanza, Indra Sakti Harahap, Jos Istiyanto, Tri Kurniawati, Ahmad Jabir Rahyussalim
pages: 1643-1648 [Full text](#) DOI:10.18517/ijaseit.9.5.10215

Characterization of Probiotic Bacterial Candidates from Jatinangor-Indonesia Breast Milk

In-In Hanidah, Indira Lanti Kaya Putri, Wendry Setiyadi Putranto, Bambang Nurhadi, Debby Moody Sumanti
pages: 1649-1655 [Full text](#) DOI:10.18517/ijaseit.9.5.10124

Effect of *Lactobacillus casei* subsp. *casei* R-68 Isolated from Dadih on the Procarcinogenic Enzyme Activity and Fecal Microflora Count of Rats Challenged with Pathogenic Bacteria

Usman Pato, Yusmarini Yusuf, Yudi Prasetya Nainggolan
pages: 1656-1662 [Full text](#) DOI:10.18517/ijaseit.9.5.8812

West Sumatera Brown Rice Resistance to Fe

Indra Dwipa, Irfan Suliansyah, Etti Swasti
pages: 1663-1669 [Full text](#) DOI:10.18517/ijaseit.9.5.9823

Physical Characteristic of Biomass Pellet from Cacao Pod Husk and Banana Pod Husk

Sandra Sandra, Retno Damayanti, Bambang Susilo, Galuh Dharmesti
pages: 1670-1675 [Full text](#) DOI:10.18517/ijaseit.9.5.9595

The Effect of the Addition of "Senduduk" leaves (*Melastoma malabthricum*) on The Characteristic of Crackers

Kesuma Sayuti, Deivy Andhika Permata, Oni Novita
pages: 1676-1680 [Full text](#) DOI:10.18517/ijaseit.9.5.10247

Phenotypic Identification of Lactic Acid Bacteria From Civet (*Paradoxorus Hermaphroditus*)

Murna Muzaifa, Dian Hasni, Anshar Patria, - Febriani, Amhar Abubakar
pages: 1681-1686 [Full text](#) DOI:10.18517/ijaseit.9.5.10222

Rheology of The Glutinous Rice Flour, Coconut Milk, and Palm Sugar Mixed System in A Traditional Food Dodol Ulame

Gusti Setiavani, - Sugiyono, Adil Basuki Ahza, Nugraha Edi Suyatma
pages: 1687-1694 [Full text](#) DOI:10.18517/ijaseit.9.5.9653

The Detection of *Anaphalis* spp. Genetic Diversity Based on Molecular Character (using ITS, ETS, and EST-SSR markers)

Filza Yulina Ade, Luchman Hakim, Estri Laras Arumingtyas, Rodiyati Azrianingsih
pages: 1695-1702 [Full text](#) DOI:10.18517/ijaseit.9.5.9597

The Role of Dams on Water, Food, and Energy Security Issues: A Global Review and Resolution for Indonesia

Insannul Kamil, Mego Plamonia, Berry Yuliandra, Chitrakala Muthuveerappan, Buang Alias
pages: 1703-1708 [Full text](#) DOI:10.18517/ijaseit.9.5.9474

Estimating and Reducing the Release of Greenhouse Gases in Local Road Pavement Constructions

Fajar Sri Handayani, Florentina Pungky Pramesti, Mochamad Agung Wibowo, Ary Setyawan
pages: 1709-1715 [Full text](#) DOI:10.18517/ijaseit.9.5.9705

Evaluation of Seismic Performance Based on A Direct Displacement-based Method

Usman Wijaya, Roesdiman Soegiarso, - Tavio
pages: 1716-1724 [Full text](#) DOI:10.18517/ijaseit.9.5.7932

Zone of Groundwater Quantitative Potential Based on the Characteristics of a Confined Aquifer at the Palu Groundwater Basin Central Sulawesi Province, Indonesia

- Zeffitni, Muhammad Basir-Cyio, Mery Napitupulu
pages: 1725-1731 [Full text](#) DOI:10.18517/ijaseit.9.5.3532

Development of PSO for tracking Maximum Power Point of Photovoltaic Systems

Cong Thanh Pham, Khai Hoan Nhu, Van Huong Dong, Thi Huong Le, Thi Thom Hoang
pages: 1732-1738 [Full text](#) DOI:10.18517/ijaseit.9.5.9431



Member of



Model Simulation for the Spread of Rabies in Sarawak, Malaysia*Nur Asheila Abdul Taib, Jane Labadin, Phang Piau*pages: 1739-1745 [Full text](#) DOI:10.18517/ijaseit.9.5.10230**The Pattern of EDTA-Blood Photo Spectrum in Ovarian Cancer Patients: A Novel Biomarker***- Ngadikun, Untung Widodo, - Tasmini, Heru Pradjatmo, Ahmad Hamim Sadewa, Kuncoro Asih Nugroho*pages: 1746-1753 [Full text](#) DOI:10.18517/ijaseit.9.5.4951**Simulation of Internal Undular Bores Propagating over a Slowly Varying Region***M. H. Hooi, W. K. Tiong, K. G. Tay, S. N. Sze, K. L. Chiew*pages: 1754-1760 [Full text](#) DOI:10.18517/ijaseit.9.5.10236**Some Considerations and a Benchmark Related to the CNF Property of the Koczy-Hirota Fuzzy Rule Interpolation***Maen Alzubi, Szilveszter Kovacs*pages: 1761-1771 [Full text](#) DOI:10.18517/ijaseit.9.5.8356**A New Approach to Model Parameter Determination of Self-Potential Data using Memory-based Hybrid Dragonfly Algorithm***Irwansyah Ramadhani, Sungkono Sungkono*pages: 1772-1782 [Full text](#) DOI:10.18517/ijaseit.9.5.6587

Published by INSIGHT - Indonesian Society for Knowledge and Human Development

© IJASEIT - ISSN: 2088-5334 | e-ISSN : 2460-6952 | DOI : 10.18517



is licensed under a Creative Commons Attribution-ShareAlike 4.0 International License.

88827499 [View My Stats](#)

International Journal on Advanced Science Engineering Information Technology

[HOME](#) [ARCHIVES](#)

Editorial Team

Editor in Chief :

Rahmat Hidayat, (Scopus ID: 57191265401) Politeknik Negeri Padang, INDONESIA

Associate Editors :

Taufik, (Scopus ID: 23670809800), California Polytechnic State University, USA
 Haitham Alali, (Scopus ID: 49963007000), Amman Arab University, JORDAN
 Wan Mohhtar Wan Yusoff, (Scopus ID: 15019967700), Univ. Kebangsaan Malaysia, MALAYSIA
 Halimah Badioze Zaman, (Scopus ID: 25825801600), Univ. Kebangsaan Malaysia, MALAYSIA
 Son Radu, (Scopus ID: 7005251005), Universiti Putra Malaysia, Malaysia, MALAYSIA
 Mohd Razi Ismail, (Scopus ID: 25957691400), Universiti Putra Malaysia, MALAYSIA
 Takashi Oku, (Scopus ID: 56275094900), Prefectural University of Hiroshima, JAPAN
 Kohei Nakano, (Scopus ID: 7402011766), Gifu University, JAPAN
 Nurul Huda, (Scopus ID: 6701695514), Universiti Malaysia Sabah, MALAYSIA
 Yandra Arkeman, (Scopus ID: 55946558300), Bogor Agriculture University, INDONESIA
 Sate Sampattagul, (Scopus ID: 7801640861), Chiangmai University, THAILAND
 Peeyush Soni, (Scopus ID: 9248907800), Asian Institute of Technology, THAILAND
 Yolanda Lechon Perez, (Scopus ID: 6602826000), Ciemat, Madrid, SPAIN
 Gabriele Arcidiacono (Scopus ID: 56656284600), G. Marconi University, ITALY
 Alessandra Pieroni (Scopus ID: 25929524500), . Marconi International University, Florida - USA
 Nguyen Hay , (Scopus ID: 15834645900) Nong Lam University. VIETNAM
 Rita Muhamad Awang, (Scopus ID: 55957782400), Universiti Putra Malaysia, MALAYSIA
 Anton S Prabuwo, (Scopus ID: 18134309800), King Abdulaziz Univ, SAUDI ARABIA
 P Mangala C S De Silva, (Scopus ID: 7006461145), University of Ruhuna, SRI LANKA
 Bich Huy Nguyen, (Scopus ID: 36191086100), Nong Lam University, VIETNAM
 Paul Kristiansen, (Scopus ID: 23097563600), University of New England, AUSTRALIA
 Amitava Basu, (Scopus ID: 21833738300), Bidhan Chandra Krishi Vidyalyaya, INDIA
 Shahrul Azman Mohd Noah, (Scopus ID: 35087633200), Universiti Kebangsaan Malaysia, MALAYSIA
 Luca Di Nunzio (Scopus ID: 57195199010), University of Rome Tor Vergata, ITALY
 Rocco Fazzolari (Scopus ID: 36469997900), University of Rome Tor Vergata, ITALY
 Ruben Paul Borg (Scopus ID: 55246483600), L-Università ta' Malta, Msida, Malta

Editors :

Nurhamidah, (Scopus ID: 57191636504), Andalas University, INDONESIA
 Ario Betha Juansilfero, (Scopus ID: 57189369470), Kobe University, JAPAN
 Zairi Ismael Rizman, (Scopus ID: 36959761800), Universiti Teknologi MARA (UiTM) (Terengganu) MALAYSIA
 Shahreen Kasim, (Scopus ID: 36155431900), Universiti Tun Hussein Onn - MALAYSIA
 Chi-Hua Chen, (Scopus ID: 35799698800), National Chiao Tung University, TAIWAN
 Abrar Ismardi, (Scopus ID: 26633102900), Telkom University - INDONESIA

IJASEIT

[About](#)

[Editorial Board](#)

[Guide for Authors](#)

[Journal Contact](#)

[Online Submission](#)

[Peer Review Policy](#)

[Publication Ethics](#)

[Browse Authors](#)

[NEW Update : IJASEIT in Scopus](#)

[NEW Update : IJASEIT in Scimago JR](#)

Scimago Journal Rank



Scopus CiteScore

1.31 2017
CiteScore

Powered by **Scopus**

Column Study of Aluminum Adsorption from Groundwater by Natural Pumice

Shinta Indah^{#1}, Denny Helard^{#2}, Fatilla Hudawaty^{#3}

[#]Department of Environmental Engineering, Faculty of Engineering, Universitas Andalas, Padang, 25163, Indonesia
E-mail: ¹shintaindah@eng.unand.ac.id; ²dennyhelard@eng.unand.ac.id; ³fatilla.hudawaty@gmail.com

Abstract— Contamination of groundwater by heavy metals is an environmental problem worldwide. Metal poisoning leads severe damage to human health that can cause the death. One of metals contained in the ground water is aluminium, which can be selectively leached from rock and soil to enter any water source. The removal of aluminum from groundwater by natural pumice from Sungai Pasak, West Sumatera, Indonesia was investigated in a continuous fixed-bed column. The performances of column were evaluated by varying the adsorbent bed depth (65–85 cm) and influent flow rate (2 - 4 gpm/ft² equal to 43–87 mL/min). The results revealed that the increase in bed depth increased the amount of adsorbent used, thus increasing the total removal of aluminum and prolonged the lifespan of the natural pumice column. However, the increase in influent flow rate resulted in the shortened lifespan of the column. The increased flow rate also led the column exhaustion time to reach earlier. Therefore, to obtain optimum performance, suitable parameters are necessary for the column system operation. The column system with a bed depth of 85 cm and flow rate of 2 gpm/ft² (43 mL/min) showed the best aluminum uptake performance in this study with a total removal of 59.5% and an adsorption capacity of 0.056 mg/g. The results showed that the natural pumice has potential for removing of aluminum from groundwater by column.

Keywords— adsorption; aluminum; column; pumice.

I. INTRODUCTION

Pollution of heavy metal in the water environment has become a great concern over the last decade. Metal poisoning leads serious damage to human health that can cause the death [1]. Contamination of groundwater by heavy metals is an environmental problem worldwide. One of metals contained in the ground water is aluminum. Aluminum can be leached selectively from rock and soil to enter any water source. In groundwater, Al³⁺ is known to exist in concentrations ranging from 0.1 ppm to 8.0 ppm [2], [3].

Many types of treatment for metal removal from water have been developed through water treatment systems like flocculation, coagulation, ion-exchange, membrane filtration, chemical precipitation, chemical oxidation, , reverse osmosis and ozonation [4]–[7]. Nevertheless, for these methods, the procedures and operational costs are known to be expensive due to the complicated operational procedures, the high maintenance cost and time consuming as well as manpower requirements..

Several studies have been conducted to improve the operational period and minimize the operational costs of the treatment process by using natural materials which are abundantly available to search alternative methods. Some kinds of adsorbents have been used for metal removal from

water in the recent literature, such as seashells, crab shells, eggshells, palm husks, rice husks, fruit seeds, fruit peel, zeolites, and pumice [2], [8]–[13]. Among these natural materials, pumice which is a volcanic stone and can be found in many regions of the world has a low weight and a porous structure (up to 85%). Because of its micro-porous structure, pumice has a high specific surface area, so that, pumice recently has been also utilized as adsorbent to remove pollutant from water and wastewater [14].

This research was performed to evaluate the performance of natural pumice for aluminum removal from actual groundwater through a fixed-bed column. The natural pumice was collected from Sungai Pasak, West Sumatera, Indonesia. In this location, pumice is available in a high abundance, as byproduct of sand mining process. This local mineral has potential for removal of iron and manganese from water, as previous investigations [13], [14]. On the other hand, the application of column adsorption is practical and economic since the operation is performed continuously and the process is controllable [15], [16]. The effect of parameters like bed depth and flow rate on the shape of the breakthrough curve was studied. The column performance was examined by the total removal percentage of aluminum ions and the capacity of adsorbent required for aluminum ions removal.

II. MATERIALS AND METHOD

A. Preparation of Adsorbent

Pumice samples were obtained from riverside of Sungai Pasak, West Sumatera, Indonesia as by product of the sand mining process. Pumice samples were washed with distilled water several times and dried out at room temperature, then to obtain the desired particle size fractions, the natural pumice was crushed and sieved. Energy dispersive x-ray (EDX) spectroscopy was employed to obtain information on the oxide content of the natural pumice. The surface morphology of pumice was observed by a scanning electron microscopy (SEM, model S-3400N, Hitachi, Japan).

B. Preparation of Adsorbent

Groundwater sample was collected from one of the residence wells in the settlement area located in Padang, West Sumatera, Indonesia, with a 1.14-3.25 mg/L of aluminium concentration of and 6.2 of pH.

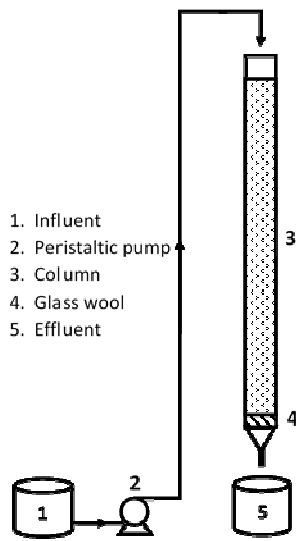


Fig.1 A schematic of fixed-bed column of natural pumice for aluminum adsorption.

C. Fixed-bed column studies

The experiments was used a glass column with a length of 130 cm and an inner diameter of 2.6 cm. At the bottom of the column, a glass wool were placed to avoid loss of adsorbent during the adsorption process. Figure 1 presents the schematic of fixed-bed column system. A known weight of pumice with the particle size of 0.5 – 1 mm as adsorbent was packed into the column. Before the experiment began, to attract the trapped air between the particles, the deionised water was used in downward flow direction for wetting the adsorbent in the column. The groundwater sample were fed downward continuously into the column by a peristaltic pump (Kamoer, China). The experiment was conducted at room temperature $27 \pm 2^\circ\text{C}$. Effects of process parameter like flow rates (2 gpm/ft², 3 gpm/ft² and 4 gpm/ft² equal to 43, 65 and 87 mL/min) and bed depth (65, 75, and 85 cm) were investigated. Samples were collected every 60 minutes from the bottom of the column and were measured for the remaining aluminum by Inductively Coupled Plasma–

Atomic Emission Spectrometer (Shimadzu, ICPE-9000, Japan). The column performance was investigated by calculating the breakthrough time and adsorption capacity.

D. Mathematical formula of fixed bed column studies

The performances of column were evaluated through the breakthrough curve of the fixed bed column. The breakthrough curve was expressed by C_t/C_0 , in which C_t and C_0 respectively symbolize the concentration of effluent and influent. The curve was described as C_t/C_0 against the contact time. The concentrations of adsorbed metal ion in the column were confirmed by a plot of the adsorbed metal concentration (C_{ad} = inlet concentration (C_0) - outlet concentration (C_t)) or normalized concentration assigned as the ratio of effluent metal concentration to influent concentration (C_t/C_0) as a function of time or volume of effluent (V_{eff}), as shown in equation (1) [17].

$$V_{eff}(\text{mL}) = Q t_{total} \quad (1)$$

In equation (1), the Q and t_{total} respectively reflect the volumetric flowrate (mL/min) and total flow time (min). By integrating the plot of adsorbed concentration (C_{ad}) versus the flow time (t), the total adsorbed metal ion (q_{total}) by the column can be calculated. The area (A) under this integrated plot is substituted in equation (2) to determine q_{total} .

$$q_{total}(\text{mg}) = \frac{QA}{1000} = \frac{Q}{1000} \int_{t=0}^{t=t_{total}} C_{ad} dt \quad (2)$$

The total amount of metal ions passed to the column system (m_{total}) is gained from equation (3).

$$m_{total}(\text{mg}) = \frac{C_0 Q t_{total}}{1000} \quad (3)$$

The performance of column can be examined by the percentage of total metal ion removal from the ratio of total adsorbed metal ions in the column to the total amount of metal ions delivered to the column, as shown in equation (4).

$$\text{Total removal of metal ions (\%)} = \frac{q_{total}}{m_{total}} \times 100 \quad (4)$$

To obtain the adsorbent capacity required for metal ions removal, the equilibrium adsorption was calculated from the column data. Equation (5) declares the equilibrium metal ion uptake (q_{eq}), also known as the column maximum capacity.

$$q_{eq}(\text{mg/g}) = \frac{q_{total}}{X} \quad (5)$$

where, X is the unit mass of adsorbent packed in the column.

III. RESULTS AND DISCUSSION

A. Physical Characteristics of Natural Pumice

Si, Al and Fe are the major elements in natural pumice from Sungai Pasak, as shown in Table 1 as determined by EDX. Other elements, except K, Ca, Na and Mg were present in relatively smaller amounts (less than 3%). The

elemental compositions of the pumice also indicate the absence of hazardous or carcinogenic substances, thus the pumice are considered appropriate as adsorbent to treat polluted water. The SEM image showed the surface morphology of natural pumice from Sungai Pasak, West Sumatra was displayed in Figure 2. The image denoted that the pumice had an irregular texture, cellular, smooth surface, and highly porous with great cavities, that serves compatible sites for adsorption.

TABLE I
CHEMICAL COMPOSITION OF NATURAL
PUMICE FROM SUNGAI PASAK, WEST SUMATRA, INDONESIA

Constituent	Percentage (%)
SiO ₂	76.586
Al ₂ O ₃	13.913
K ₂ O	3.604
CaO	2.11
Fe ₂ O ₃	1.485
MgO	0.876
P ₂ O ₅	0.822
TiO ₂	0.197
Ag ₂ O	0.143
MnO	0.044
Other materials	0.22

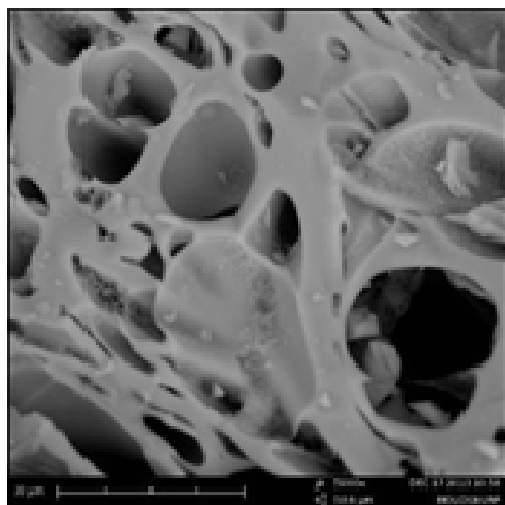


Fig. 2 SEM image of natural pumice from Sungai Pasak, West Sumatra, Indonesia.

B. Column Studies

The ratio of effluent metal concentration to the metal inlet concentration (C_{eff}/C_0) against the flow time (t) was used to represent the plot of the breakthrough curve, to evaluate the performance of the continuous fixed-bed column system. The breakthrough takes place when the concentration of the counter ion in the effluent start to increase primarily until it finally achieves the same concentration as in the influent. No more ion exchange takes place after this point.

1) Effect of bed height:

The effect of a bed depth of 65, 75, 85 cm on the breakthrough curve at a various flow rates of 2 gpm/ft², 3 gpm/ft² and 4 gpm/ft² (equal to 43, 65 and 87 mL/min, respectively) was investigated (Figure 3). The results reveal that with the variation in bed depth, the shape and gradient of the breakthrough curve was slightly different. At the beginning of the fixed-bed column, the higher uptake of aluminum was observed, but the aluminum concentration in the effluent increased quickly after breakthrough time. The lower bed depth reaches saturated earlier than higher bed depth.

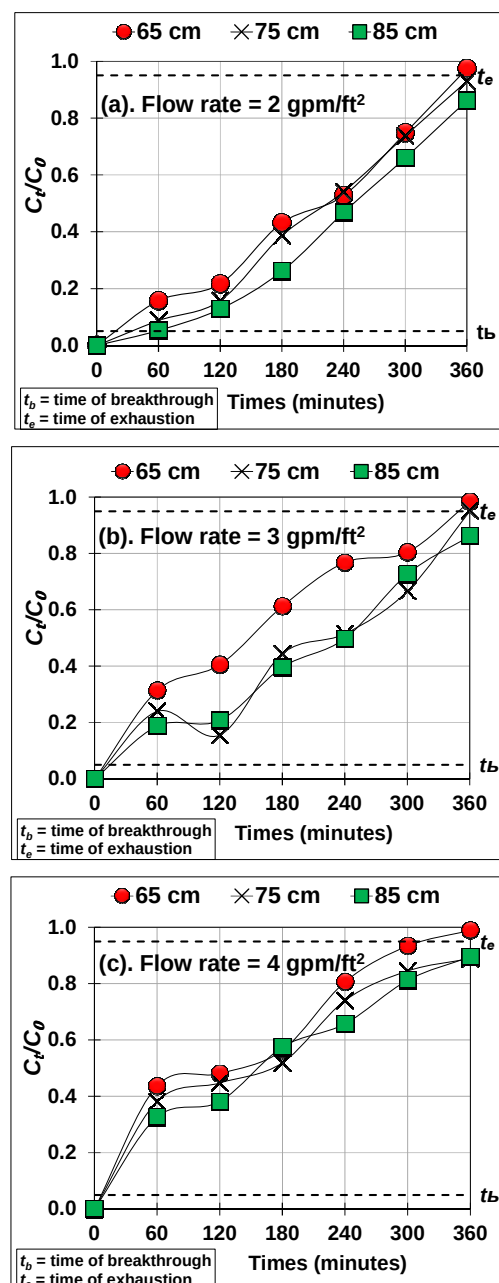


Fig. 3. Effect of various bed depth on the breakthrough curve of aluminum adsorption onto natural pumice at various flow rates: (a). 2 gpm/ft², (b). 3 gpm/ft² and (c). 4 gpm/ft² (aluminum concentration = 1.14 mg/L; pH 6.2).

From the Figure 3, at all of various flow rates, it is observed that time of breakthrough (t_b) and time of exhaustion (t_e) increase as the bed depth increase. The breakthrough time of column and the performance of adsorbent bed are strongly influenced by the length of the bed depth [1], [18]. From the results, it can be resumed that the aluminum uptake in in a column increase as the bed depth increase which in consequence of the increasing of contact time for aluminum adsorption. At lowest bed depth there is no sufficient time for aluminum ions to admit into the pores of pumice. The longer bed also postponed the exhaustion time of the adsorbent, reflecting a longer period of the bed operation without changing the adsorbent. However, the exhaustion approached faster for the shorter bed, thus the performance degenerated [19].

2) Effect of flow rate:

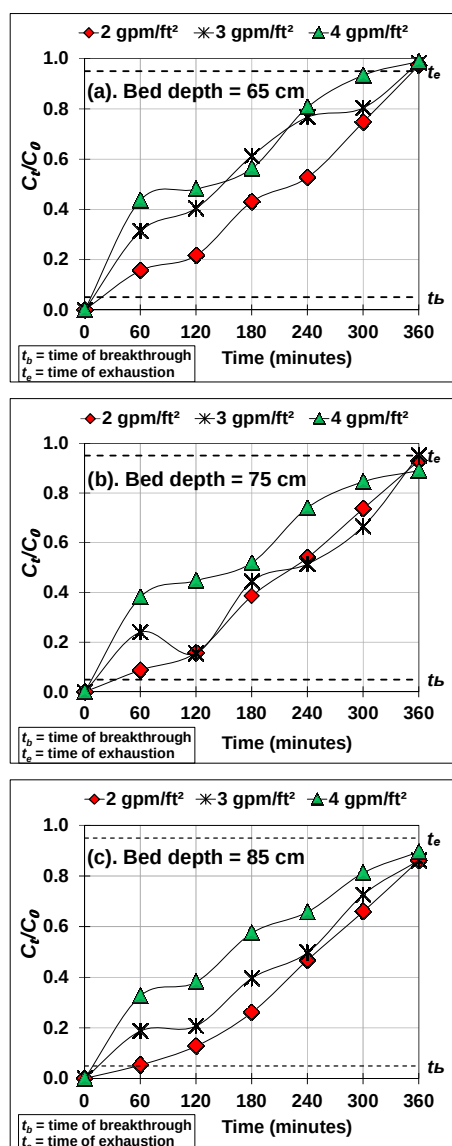


Fig. 4 Effect of various flow rates on the breakthrough curve of aluminum adsorption onto natural pumice at various bed depths: (a). 65 cm, (b). 75 cm dan (c) 85 cm (aluminum concentration = 1.23 mg/L; pH 6.2).

As shown in Figure 4, the results indicate that a decrease in flow rate at all various bed depth increased the breakthrough time (t_b). The results also show that at higher flow rates, the shape of the breakthrough curve is saturated earlier since the front of the adsorption zone rapidly attained the top of column. Conversely, a shallow adsorption zone was observed at lower flow rate and longer contact time. Moreover, the increased flow rate resulted the contact time between the adsorbate and adsorbent were relatively short. Consequently, the adsorption was not complete and at the beginning of the operation, led to steep breakthrough results [9], [19]. From the effect of flow rate study, it was indicated that lower flow rate or longer contact time would be needed for aluminum adsorption in the column of natural pumice.

C. Total Removal and Adsorption Capacities

To present information on the effect of parameters, the column data were calculated into the mathematical theories of the column system. The total removal percentage of columns aluminum tends to increase with the increase in adsorbent bed depth and decrease in flow rate (Figure 5(a)). Moreover, it is observed that the adsorption capacity of the columns increased as the flow rates increased for all various bed depth, as shown in Figure 5(b).

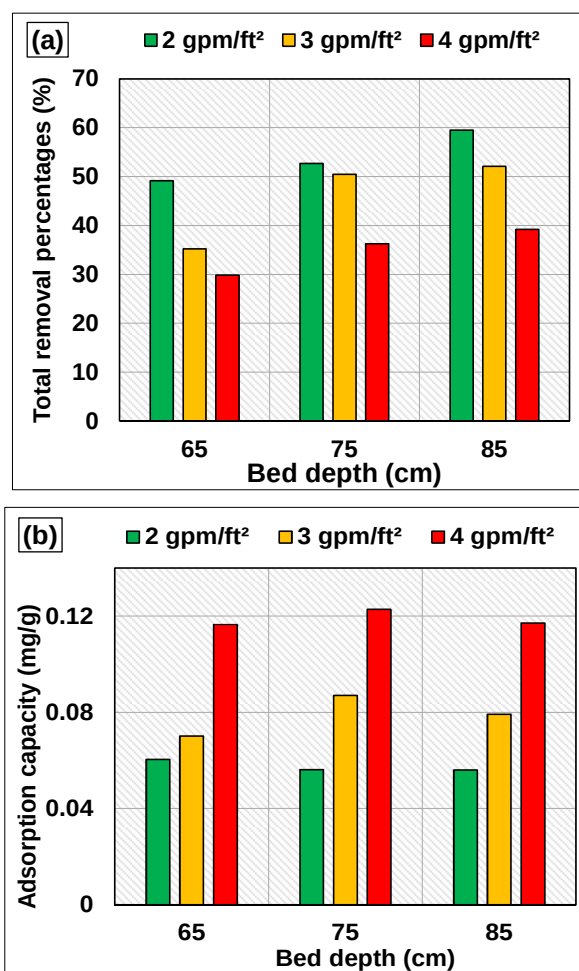


Fig. 5 Total removal percentages and adsorption capacities of aluminum by column of natural pumice at various bed depths and flow rates (aluminum concentration = 1.14 mg/L, pH 6.2)

IV. CONCLUSIONS

The removal of aluminum from groundwater was carried out in a continuous fixed-bed column system with variation of the bed depth and flow rate. The results show that the aluminum adsorption through fixed-bed columns depended on the bed depth and flow rate. The change in bed depth extremely influenced the performance of column by decelerating the exhaustion time and enhancing the column quality. The increase in the bed depth and decrease of the flow rate resulted the greatly increase of the total removal percentage of aluminum. However, the increase in flow rate led to accelerate the exhaustion of the column. Accordingly, to obtain optimum performance, suitable parameters are necessary for the column system operation. Therefore information obtained from the fixed bed column study suggested that the natural pumice has potential to be used as adsorbent for treatment of aluminum from groundwater or other polluted waters.

ACKNOWLEDGMENT

This work was supported by Research Institution and Community Service, Universitas Andalas, Indonesia (Grand No.01/UN.16.17/PP.PTUPT.K/LPPM/2018).

REFERENCES

- [1] A. P. Lim and A. Z. Aris, "Continuous fixed-bed column study and adsorption modeling: removal of cadmium (II) and lead (II) ions in aqueous solution by dead calcareous skeletons," *Biochem. Eng. J.*, vol. 87, pp. 50–61, June 2014.
- [2] U. Kumar and M. Bandyopadhyay, "Sorption of cadmium from aqueous solution using pretreated rice husk," *Bioresour. Technol.*, vol. 97(1), pp. 104–109, Jan 2006.
- [3] Water Quality Association (2013), Aluminum Fact Sheet, Retrieved from https://www.wqa.org/Portals/0/Technical/Technical%20Fact%20Sheets/2014_Aluminum.pdf
- [4] C. Li and P. Champagne, "Fixed-bed column study for the removal of cadmium (II) and nickel (II) ions from aqueous solutions using peat and mollusk shells," *J. Hazard. Mater.*, vol. 171, pp. 872–878, Nov. 2009.
- [5] N.K.E.M Yahaya, I Abustan, L.M.F.P Mohaed, O.S Bello and Ahmad M.A, "Fixed-bed column study for Cu(II) removal from aqueous solutions using rice husk based activated carbon," *Int. J. Eng. Technol. IJET-IJENS* 11 (01) 186–190, February 2011.
- [6] R. Gonte and .K Balasubramanian, "Heavy and toxic metal uptake by mesoporous hypercrosslinked SMA beads: isotherms and kinetics," *J. Saudi Chem. Soc.*, vol. 20 (Supplement 1), pp. S579-S590, September 2016.
- [7] S.A. Grieco and B.V. Ramarao, "Removal of TCEP from aqueous solutions by adsorption with zeolites," *Colloids Surf. A: Physicochem. Eng. Aspects*, vol. 434, pp. 329-338, October 2013.
- [8] M. Y. Lee, J.M. Park, and J. W Yang, "Micro precipitation of lead on the surface of crab shell particles," *Process Biochem.*, vol. 32 (8), pp. 671–677, November 1997.
- [9] K.Vijayaraghavan, J. Jegan, K. Palanivelu and M. Velan, "Removal of nickel(II) ions from aqueous solution using crab shell particles in a packed bed up-flow column," *J. Hazard. Mater.*, vol. B113, pp. 223–230, September 2004.
- [10] R. Apiratikul and P. Pavasant, "Batch and column studies of biosorption of heavy metal by *Caulerpa lentillifera*," *Bioresour. Technol.*, vol. 99, pp. 2766–2777, May 2008.
- [11] M. Ahmad, S. S. Lee, S. E. Oh, D. Mohan, D. H. Moon, Y. H. Lee, Y. S. Ok, "Modeling adsorption kinetics of trichloroethylene onto biochars derived from soybean stover and peanut shell wastes," *Environ. Sci. Pollut. Res.*, vol. 20 (12), pp. 8364–8373, April 2013
- [12] P. Bhattacharya, P. Banerjee, K. Mallick, S. Ghosh, S. Majumdar, A. Mukhopadhyay and S. Bandyopadhyay, "Potential of biosorbent developed from fruit peel of *Trewia nudiflora* for removal of hexavalent chromium from synthetic and industrial effluent: Analyzing phytotoxicity in germinating *Vigna* seeds," *J. Environ. Sci. Health A: Tox. Hazard. Subst. Environ. Eng.*, vol. 48 (7), pp. 706–719, June 2013.
- [13] S. Indah, D. Helard, T. Edwin and R. Pratiwi, "Utilization of pumice from Sungai Pasak, West Sumatera, Indonesia as low-cost adsorbent in removal of manganese from aqueous solution," *AIP Conference Proceedings*, vol. 1823, 020072-1–020072-8, 2017.
- [14] S. Indah, D. Helard and A. Binuwara, "Studies on desorption and regeneration of natural pumice for iron removal from aqueous solution," *Wat Sci. Tech. Bonus Issue*, vol. 2, pp. 509-515, 2017.
- [15] V. Vinodhini and D. Nilanjana, "Packed bed column studies on Cr (VI) removal from tannery wastewater by neem sawdust," *Desalination*, vol. 264(1-2), pp. 9-14, December 2010.
- [16] A.D. Dorado, X. Gamisans, C. Valderrama, M. Solé, and C. Lao, "Cr(III) removal from aqueous solutions: A straightforward model approaching of the adsorption in a fixed-bed column," *J. Environ. Sci. Health A: Tox. Hazard. Subst. Environ. Eng.*, vol. 49(2), pp. 179–186, January 2014.
- [17] Z. Aksu, F. Gonen and Z. Demircan, "Biosorption of chromium(VI) ions by Mowital®B30H resin immobilized activated sludge in a packed bed: Comparison with granular activated carbon," *Process Biochem.*, vol. 38, pp. 175–186, October 2002.
- [18] P. Suksabye, P. Thiravetyan and W. Nakbanpote, "Column study of chromium(VI) adsorption from electroplating industry by coconut coir pith," *J. of Hazard Mater*, vol. 160(1), pp. 56-62, December 2008.
- [19] X. Xu, B. Gao, X. Tan, X. Zhang, Q. Yue, Y. Wang and Q. Li, "Nitrate adsorption by stratified wheat straw resin in lab-scale columns," *Chem. Eng. J.*, vol. 226, pp. 1–6, June 2013.

Author Profile



SHINTA INDAH

Universitas Andalas

Environmental Engineering

SINTA ID : 259373

Subjects/Areas:

ID

[Teknik Lingkungan](#) [Kimia Air](#) [Pengelolaan Kualitas Air](#)



5.25

Overall Score

1.29

3 Years Score

469

Overall Score V2

218

3 Years Score V2

1

Books

13624

Rank in National

13521

3 Years National Rank

6

IPR

Scoring

222

Rank in Affiliation

197

3 Years Affiliation Rank

Search..



Filter by type:

[Journal](#)

[Proceeding](#)

[Book](#)

[Other](#)

[* All](#)

Quartile	Publications	Citation
Q2	<u>Utilization of maize husk (Zea mays L.) as low-cost adsorbent in removal of iron from aqueous solution</u> Water Science and Technology vol: 73 issue : 12 2016-06-01 Journal	9
Q2	<u>Studies on desorption and regeneration of natural pumice for iron removal from aqueous solution</u> Water Science and Technology vol: 2017 issue : 2 2017-01-01 Journal	4
Q4	<u>Utilization of pumice from Sungai Pasak, West Sumatera, Indonesia as low-cost adsorbent in removal of</u> AIP Conference Proceedings vol: 1823 issue : 1 2017-03-17 Conference Proceedin	3
Q3	<u>Spatial variation of metals in the Batang Arau River, West Sumatera, Indonesia</u> Water Environment Research vol: 90 issue : 3 2018-03-01 Journal	1
Q3	<u>Spatial distribution of coliform bacteria in Batang Arau River, Padang, West Sumatera, Indonesia</u> IOP Conference Series: Materials Science and Engineering vol: 602 issue : 1 2019-09-06 Conference Proceedin	1
Q2	<u>Column study of aluminum adsorption from groundwater by natural pumice</u> International Journal on Advanced Science, Engineering and Information Technology vol: 9 issue : 5 2019-01-01 Journal	0
Q3	<u>Removal of nitrate from groundwater by column using pumice as adsorbent as an effort for water resou</u> IOP Conference Series: Materials Science and Engineering vol: 846 issue : 1 2020-05-27 Conference Proceedin	0
Q3	<u>Spatial variability of ammonium, nitrite and nitrate concentrations in water of Batang Arau River, West Sumatera, Indonesia</u> Water Science and Technology: Water Supply vol: 20 issue : 4 2020-06-01 Journal	0
Q4	<u>Biosand Filter for Removal of Organic Pollutant from Laboratory Wastewater</u> Journal of Physics: Conference Series vol: 1625 issue : 1 2020-09-16 Conference Proceedin	0

